

# Radial incremental magnetic rings



## Radial magnetic rings for use in harsh environments

The robust RLS radial magnetic rings consist of a vulcanised elasto-ferrite layer which is firmly connected to a steel hub. The elasto-ferrite layer is magnetised with 2 mm or 5 mm long alternating magnetic poles that form an incremental magnetic pattern.

A unique or distance-coded (DCRM) reference marks can also be added to the incremental magnetic pattern.

### Compatible with RLS readheads

The magnetic incremental rings are compatible with the RLS standard LM family or the component-level RoLin readheads, which provide reliable operation due to their non-contact design. Incremental or analogue output types are available according to industry standards.

### Enhanced safety and reliability

To assure safety and reliability at high speeds and temperatures, the rings can optionally be covered with a protective stainless steel foil.

This protective layer also protects the elasto-ferrite from swarfs (e.g. metal, stone, glass, wood, etc.) and minimises the influence of ageing (e.g. UV radiation).

### Easy mounting for different shaft diameters

Different inner diameters from 20 mm to 143 mm are supported.

Radial rings allow heating up to 160 °C and are therefore ideal for shrink fitting. Due to high-precision machining, the rings can also be press-fitted.

### Applications


The magnetic incremental rings offer reliable solutions for high performance applications.

# Contents

Radial ring selection guide	3
Storage and handling	4
Accuracy of incremental ring encoder system	5
Mounting instructions for radial rings	8
MR031G	12
MR040G	16
MR047B	20
MR050E	24
MR057E	28
MR057R	32
MR075E	36
MR080R	40
MR100F	44
MR122E	47
MR162Q	50
Part numbering	53



# Selection guide




Ring	Outer diameter (OD) [mm]	Inner diameter (ID) [mm]	Height (H) [mm]	Pole length [mm]	Number of poles	Compatible with:							Page
						LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM	
MR031G	31.0 ± 0.1	20 H7	8 ± 0.1	2	50	Ri	Ri	-	No Ri	No Ri	Ri	Ri	12
	31.85 ± 0.1			5	20	-	-	Ri	-	-	-	-	
MR040G	40.0 ± 0.1	30 H7	8 ± 0.1	2	64	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	16
	40.7 ± 0.1			5	26	-	-	Ri	-	-	-	-	
MR047B	47.5 ± 0.1	40 ± 0.1	5.5 ± 0.1	2	76	No Ri	No Ri	-	No Ri	No Ri	Ri	Ri	20
MR050E	50.1 ± 0.1	40 H7	10 ± 0.1	2	80	Ri	Ri	-	No Ri	No Ri	Ri	Ri	24
	50.1 ± 0.1			5	32	-	-	Ri	-	-	-	-	
MR057E	56.5 ± 0.1	45 H7	10 ± 0.1	2	90	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	28
	57.3 ± 0.1			5	36	-	-	Ri+DCRM	-	-	-	-	
MR057R	57.5 ± 0.1	51 ± 0.1	11 ± 0.1	2	90	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	32
MR075E	75.4 ± 0.1	60 H7	10 ± 0.1	2	120	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	36
	75.4 ± 0.1			5	48	-	-	Ri+DCRM	-	-	-	-	
MR080R	80.3 ± 0.1	74	11 ± 0.1	2	128	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	40
MR100F	100.5 ± 0.1	84.77 ± 0.05	8.6 ± 0.1	2	160	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	44
MR122E	122 ± 0.1	90 H7	10 ± 0.1	2	194	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	47
MR162Q	161.7 ± 0.1	143 <sup>0</sup> -0.03	12 ± 0.1	2	256	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM	50

Ri - Unique reference mark or only incremental track available

No Ri - No reference mark option, only incremental track available


Ri+DCRM - Unique, distance-coded reference mark or only incremental track available

## Storage and handling

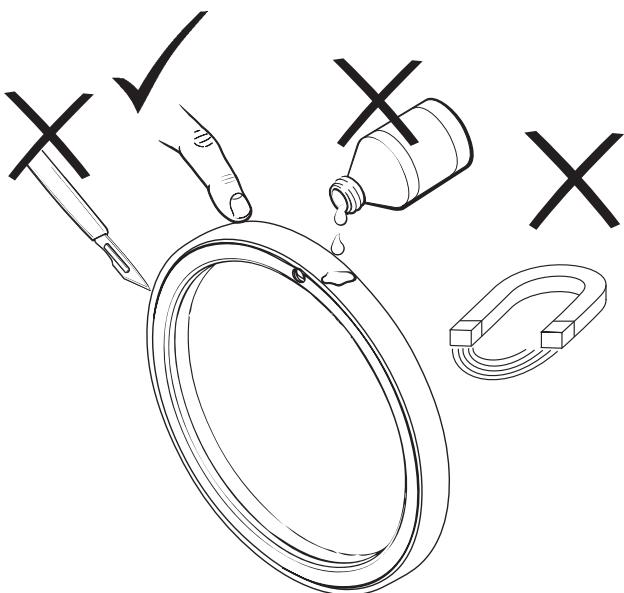


**NOTE:** The magnetic ring should not be exposed to magnetic field densities of more than 50 mT on its surface, as this can damage the ring.

### Operating and storage temperature

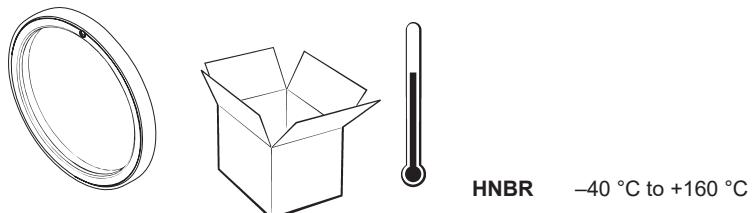

### Humidity

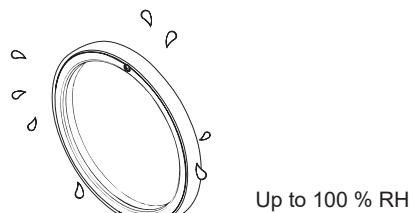

### Chemical resistance

Test performed with		Compatibility
Ethanol	Technical, ≥ 95 %	✓
Isopropanol	Technical, ≥ 95 %	✓
Cutting oil	Rezilol SCM BCL	✓
Brake fluid	DOT-4	✓
Grease	ISOFLEX® TOPAS NB 52	✓

The test samples were immersed in chemicals at 25 °C for four weeks according to standard ISO 175:2010. Changes in the mass and height of the elasto-ferrite layer were controlled during the test.

# Accuracy of ring encoder systems

The accuracy of the ring encoder measurement is influenced by **encoder-specific errors** and **installation-dependent errors**. In order to evaluate the total accuracy, each of the significant errors must be considered. Fig. 1 shows a typical accuracy error plot with marked particular influences.

## Encoder-specific errors

System error consists of a magnetisation error, crosstalk and SDE.

Ring	System error [°] (2 mm pole length)		System error [°] (5 mm pole length)	
	Over the entire RH	Up to 1 mm RH*	Up to 2.5 mm RH*	
<b>MR031G</b>	±0.16	±0.50	±1.00	
<b>MR040G</b>	±0.13	±0.40	±0.80	
<b>MR047B</b>	±0.11	-		
<b>MR050E</b>	±0.10	±0.30	±0.60	
<b>MR057E</b>	±0.09	±0.28	±0.56	
<b>MR057R</b>	±0.09	-		

Ring	System error [°] (2 mm pole length)		System error [°] (5 mm pole length)	
	Over the entire RH	Up to 1 mm RH*	Up to 2.5 mm RH*	
<b>MR075E</b>	±0.07	±0.20	±0.40	
<b>MR080R</b>	±0.06	-		
<b>MR100F</b>	±0.10	-		
<b>MR122E</b>	±0.04	-		
<b>MR162Q</b>	±0.03	-		

\*Ride height (RH) on 5 mm pole length systems (LM15) influences system error.

## Magnetisation error

The magnetisation error is caused by imperfections in the elasto-ferrite materials and possible deviations resulting from the magnetisation process. The following factors influence the result:

- the magnetic nonhomogeneity of the elasto-ferrite layer,
- the ring installation tolerances during the magnetisation process,
- the accuracy of used measuring system during the magnetisation process,
- the quality of the magnetisation system.

The magnetisation accuracy  $A_M$  can be calculated by the following formula:

$$A_M = \pm \frac{4.6}{D}$$

where  $D$  is the outer ring diameter in [mm].

D [mm]	A <sub>M</sub> [°]
20	±0.229
40	±0.115
60	±0.076

## Crosstalk

Crosstalk is an undesirable effect of reference mark magnetisation on the incremental track magnetisation, which leads to accuracy peaks. It depends on both the ride height and the lateral offset.

An example of crosstalk is shown in Fig. 2

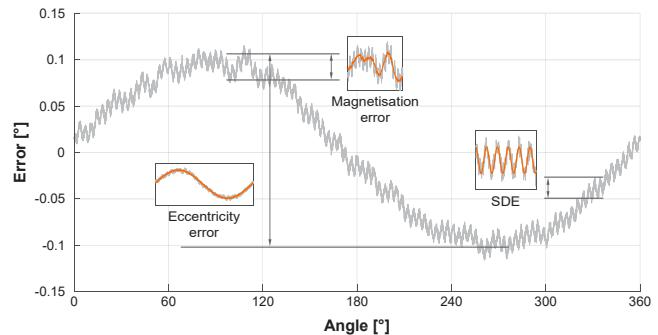


Fig. 1. Typical accuracy error plot.

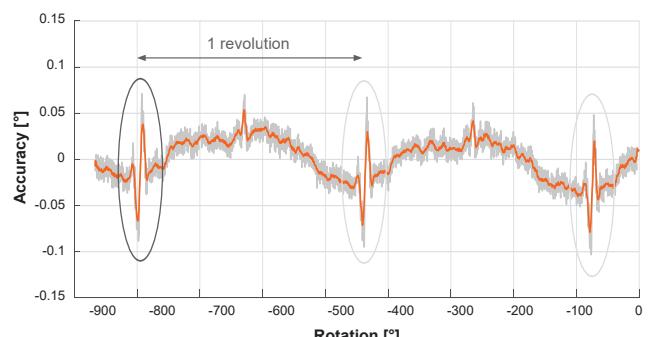


Fig. 2. Crosstalk representation. The crosstalk (Ri magnetisation) is circled.

**NOTE:** Figures 1 - 4 are for representation purpose only.

## Sub divisional error (SDE) or interpolation error

The sub divisional or interpolation error is a periodical accuracy error. It is influenced by the following factors:

- the length of poles,
- the homogeneity and cycle definition of magnetic poles,
- the sensing distance (ride height) of the installed readhead,
- the quality of the signal processing,
- the characteristics of the internal AMR sensor.

The SDE leads to speed ripples in applications where the encoder is used as speed feedback, e.g. in speed control loops. For radial rings, SDE is strongly influenced by ride height.

The maximum SDE at optimal sensing distance can be calculated by the following formula:

$$\text{For 2 mm pole length: } \text{SDE}_2 = \pm \frac{0.58 \times K}{D}$$

$$\text{For 5 mm pole length: } \text{SDE}_5 = \pm \frac{1.61 \times K}{D}$$

D [mm]	SDE <sub>2</sub> [°]	SDE <sub>5</sub> [°]
20	±0.029	±0.081
40	±0.014	±0.040
60	±0.009	±0.027

where  $D$  is the outer ring diameter in [mm].

## Hysteresis

Hysteresis is the difference in result of measuring the same point when approached from different directions.

It is known that ferromagnetic materials maintain their magnetised state in response to external fields, trying to change their direction.

The hysteresis in encoder systems depends on the strength of the magnetic field. A stronger magnetic field leads to a smaller hysteresis and vice versa. Therefore the hysteresis is strongly influenced by the ride height at which the readhead is installed (Fig. 3).

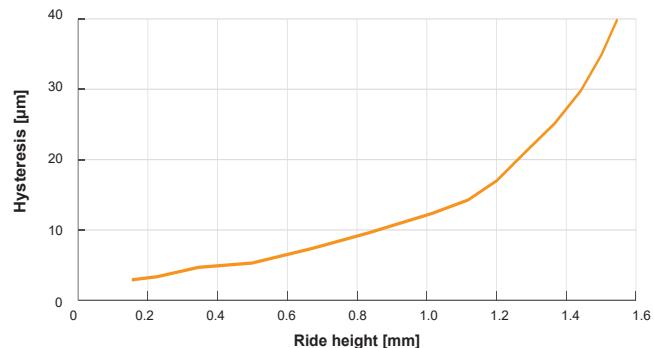


Fig. 3. Hysteresis vs. ride height (for encoder systems with 2 mm pole length).

## Installation-dependent errors

Installation and adjustment of the ring and the readhead, in addition to the given encoder-specific error, normally have a significant effect on the overall accuracy of a system. Of particular importance are the installation eccentricity and the effect of deformations resulting from the ring installation.

### Installation eccentricity

Eccentricity can be caused by the misalignment of the ring's center towards the rotational axis, as can be seen on Fig. 4.

The error caused by eccentricity can be calculated by the following formula

$$E_{\text{accuracy}} = \pm 0.114 \frac{e}{D}$$

where  $E_{\text{accuracy}}$  is eccentricity error in [°],  $e$  is misalignment of ring's center towards the rotational axis in [ $\mu\text{m}$ ] and  $D$  is the outer ring diameter in [mm].

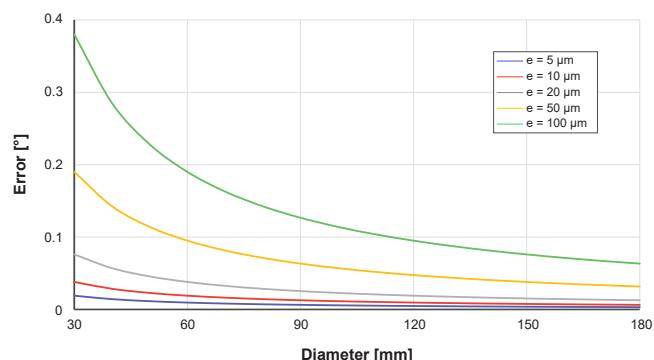


Fig. 4. Influence of installation eccentricity on accuracy.

## Deformations of the ring during installation


By installing a ring to a non-ideally circular shaft, possible deformations can occur. These can have a significant influence on the system accuracy error.

# Reference mark

## 1. Selected at point of order.

The readhead and magnetic ring should be ordered with reference mark option A (see Part numbering on [page 53](#)).

Magnetised reference mark

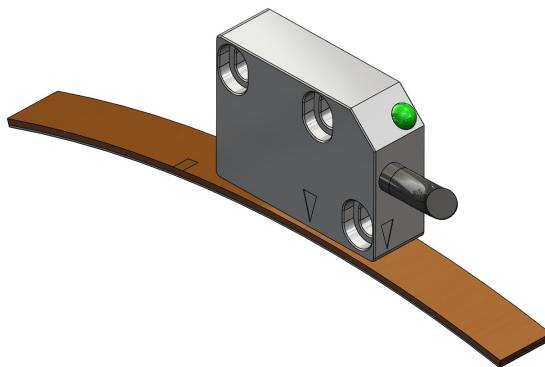

**NOTE:** The shape and position of the magnetised reference mark are critical so this option is only available as factory order.

## 2. Distance-coded reference marks (DCRM).

The readhead should be ordered with reference mark option A and the magnetic ring with reference mark option D (see Part numbering on [page 53](#)). The distance-coded reference mark option provides multiple reference marks that are individually spaced according to a specific mathematical algorithm. The absolute position is calculated after traversing 2 consecutive reference marks. The maximum length and the minimum traverse path depend on the basic distance (K) between the reference marks. The positions of the reference marks on each ring are listed in the table below.

MR040G	MR057E/MR057R		MR075E		MR080R	MR100F	MR122E	MR162Q
2 mm pole length <b>K = 32 [°]</b>	2 mm pole length <b>K = 36 [°]</b>	5 mm pole length <b>K = 60 [°]</b>	2 mm pole length <b>K = 92 [°]</b>	5 mm pole length <b>K = 60 [°]</b>	2 mm pole length <b>K = 64 [°]</b>	2 mm pole length <b>K = 40 [°]</b>	2 mm pole length <b>K = 48 [°]</b>	2 mm pole length <b>K = 64 [°]</b>
360	360	360	360	360	360	360	360	360
309.38	320	290	288	307.5	312.19	335.25	335.88	336.09
270	288	240	222	270	270	315	315.46	315
213.75	244	160	147	210	219.38	288	289.48	289.69
180	216	120	84	180	180	270	270.93	270
118.13	168	30	6	112.5	126.56	240.75	243.09	243.28
90	144	0	0	90	90	225	226.39	225
22.5	92	-	-	15	33.75	193.5	196.70	196.88
0	72	-	-	0	0	180	181.86	180
-	16	-	-	-	-	146.25	150.31	150.47
-	0	-	-	-	-	135	137.32	135
-	-	-	-	-	-	99	103.92	104.06
-	-	-	-	-	-	90	92.78	90
-	-	-	-	-	-	51.75	57.53	57.66
-	-	-	-	-	-	45	48.25	45
-	-	-	-	-	-	0	11.13	11.25
-	-	-	-	-	-	-	0	0

# Mounting instructions

Machine the mounting shaft according to the dimensions given in the table below:

Radial ring	Outer ring diameter - OD <sup>a</sup> [mm]		Inner ring diameter - ID [mm]		Shaft diameter (clearance fit installation) - Ds [mm]		Shaft outer diameter (press or shrink fit) - Dsp <sup>d</sup> [mm]		
MR031G	31.0 / <b>31.2</b>		20 H7	+0.021	20 f7 <sup>c</sup>	-0.02	20.035	+0.01	
	-0.1			0		-0.041		-0.01	
	31.85 / <b>32.05</b>		20 H7	+0.021	20 f7 <sup>c</sup>	-0.02	20.035	+0.01	
	-0.1			0		-0.041		-0.01	
MR040G	40.0 / <b>40.2</b>		30 H7	+0.021	30 f7 <sup>c</sup>	-0.02	30.04	+0.01	
	-0.1			0		-0.041		-0.01	
	40.7 / <b>40.9</b>		30 H7	+0.021	30 f7 <sup>c</sup>	-0.02	30.04	+0.01	
	-0.1			0		-0.041		-0.01	
MR047B	47.5		+0.1 -0.1		44 +0.02 <sup>b</sup>		See mounting instructions on <a href="#">page 20</a> .		
MR050E	50.1 / <b>50.3</b>		40 H7	+0.025	40 f7 <sup>c</sup>	-0.025 -0.05	40.045	+0.01 -0.01	
	-0.1			0					
MR057E	56.5 / <b>56.7</b>		45 H7	+0.025	45 f7 <sup>c</sup>	-0.025 -0.05	45.045	+0.01 -0.01	
	-0.1			0					
	57.3 / <b>57.5</b>		45 H7	+0.025	45 f7 <sup>c</sup>	-0.025 -0.05	45.045	+0.01 -0.01	
	-0.1			0					
MR057R	57.5 / <b>57.7</b>		53 <sup>b</sup>	+0.02	53	-0.04 -0.06	53.07	+0.01 -0.01	
	-0.1			-0.02					
MR075E	75.4 / <b>75.6</b>		60 H7	+0.030	60 f7 <sup>c</sup>	-0.03 -0.06	60.055	+0.01 -0.01	
	-0.1			0					
MR080R	80.3 / <b>80.5</b>		76.13 <sup>b</sup>	+0.02	76 f7	-0.03 -0.06	76.18	+0.01 -0.01	
	-0.1			-0.02					
MR100F	100.5		84.77	+0.05	See mounting instructions on <a href="#">page 44</a> .				
	-0.1			-0.05					
MR122E	122 / <b>122.2</b>		90 H7	+0.035	90 f7 <sup>c</sup>	-0.036 -0.071	90.07	+0.01 -0.01	
	-0.1			0					
MR162Q	161.7 / <b>161.9</b>		143	0	143 f7 <sup>c</sup>	-0.043 -0.083	143.06	+0.015 -0.015	
	-0.1			-0.03					

<sup>a</sup> The orange values apply to ring OD with protective foil (see Part numbering on [page 53](#)).

<sup>b</sup> The value does not represent the minimum ring diameter.

<sup>c</sup> To improve accuracy (lower eccentricity error), clearance fit H7/g6 is recommended.

<sup>d</sup> Valid for steel with typical properties  $\rho=7850 \text{ kg/m}^3$ ,  $E=210 \text{ kN/mm}^2$ ,  $R_{p_{0.2}}=500 \text{ N/mm}^2$ ,  $\alpha=11 \text{ ppm K-1}$  with the coefficient of friction  $\mu=0.3$ , under operating conditions  $a_{\max}=20000 \text{ rpm/s}$  or  $2095 \text{ rad/s}^2$  and T from  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ .

## Recommended ride height table

Please refer to the table below for the recommended ride height values. The readheads are calibrated at these values, therefore the SDE is lowest at these ride height values. The maximum range of installation tolerances for the ride height is shown in the drawings of the individual rings and readheads.

Readhead	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
Recommended ride height [mm]	0.3	0.3	0.5	0.3	0.3	0.3	0.3

**NOTE:** Ride height for radial rings with protective foil is reduced by **0.1 mm**.

## Installation by gluing

Use clearance fit for installation by gluing.


### Application

The surfaces to be stuck together must be cleaned very thoroughly before the adhesive is applied. It is worth first using abrasive cloth (abrasive rating 150-200) then degreasing using cellulose moistened with a grease solvent.

The adhesive should be applied to the parts to be stuck together as soon as possible after mixing, to ensure the best possible bond. The parts to be assembled usually need to be fixed under pressure. It is not necessary to apply extreme pressure.


At temperatures below room temperature, the hardening process takes somewhat longer. After the parts to be stuck together have been prepared, the adhesive is dosed. The adhesive should be very thoroughly mixed. For more information see adhesive manufacturer's datasheet.

### For all radial rings except MR047B and MR100F

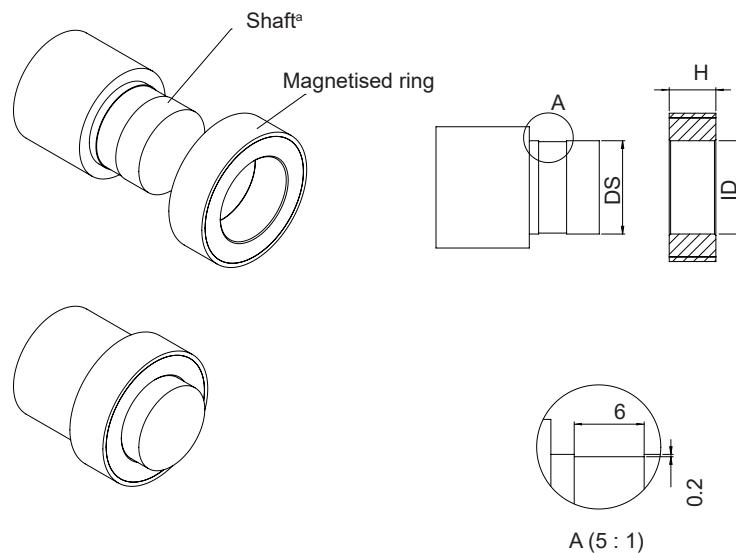

<sup>a</sup> Not provided.

### For ring MR047B

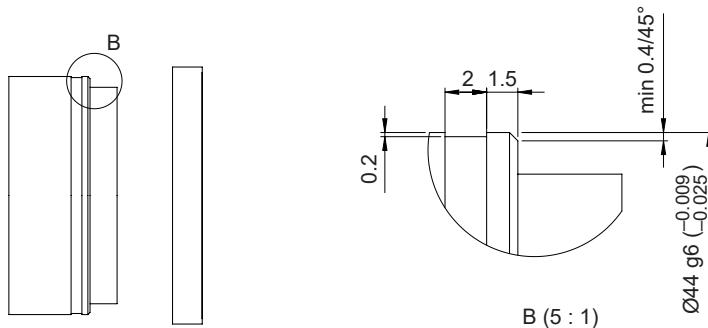

## Installation by shrink-fit

1) Heat the ring to 160 °C for 30 minutes.


2) Slip the ring onto the mating shaft.

For recommended shaft diameter (Dsp) see table on [page 8](#).

## Installation by press-fit

Press the ring onto the mating shaft applying equal or uniform force along the whole ring circumference. For recommended shaft diameter (Dsp) see table on [page 8](#).


### For all radial rings except MR047B and MR100F

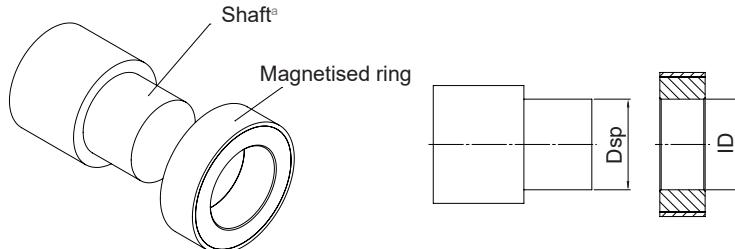

<sup>a</sup> Not provided.

### For ring MR047B


1. Slip the ring onto the mating shaft applying equal or uniform force along the whole ring circumference.

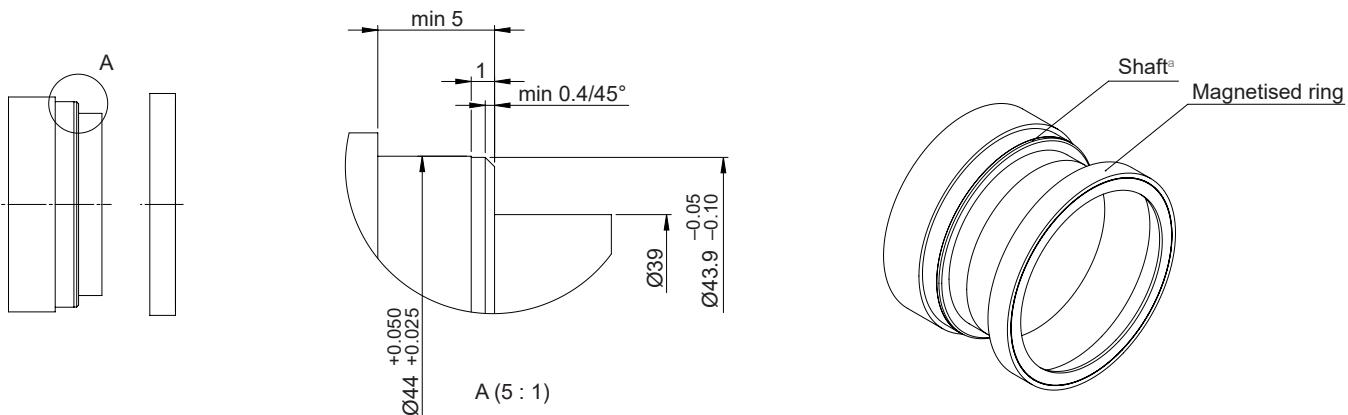

<sup>a</sup> Not provided.




### For ring MR100F

1. The inner diameter of the ring is slightly conical. Make sure that the ring is press fitted with the wider diameter first. Insert the M2.5 × 10 fastener.
2. Attach the ring by press fitting.
3. During press fitting equal pressure must be applied round the whole circumference. You may use the installation jig ACC021\*.
4. Secure the ring by M2.5 × 10 fastener. Tightening torque 0.5 Nm should be applied.

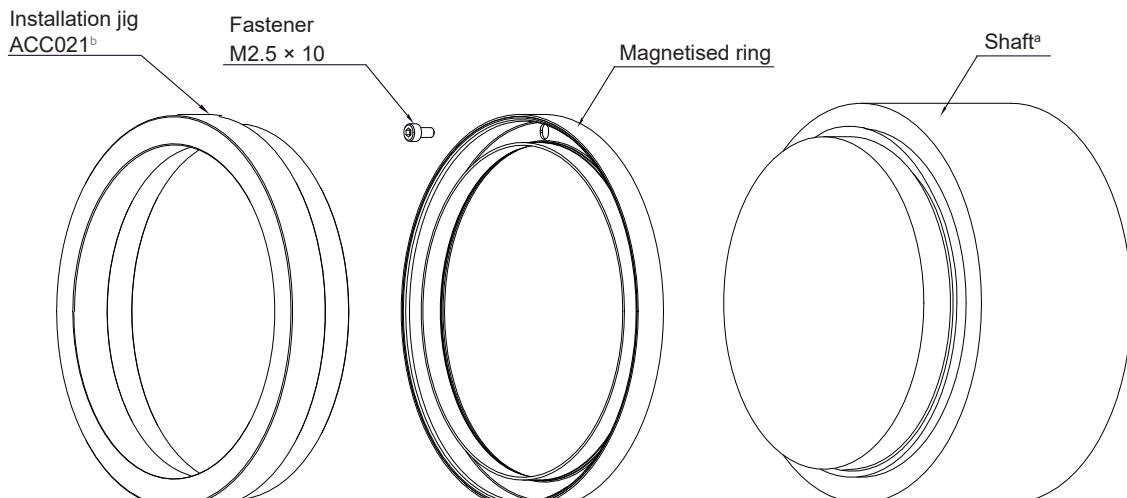

<sup>a</sup> Not provided.

<sup>b</sup> Ordered separately  
(see [Accessories part numbering](#)).

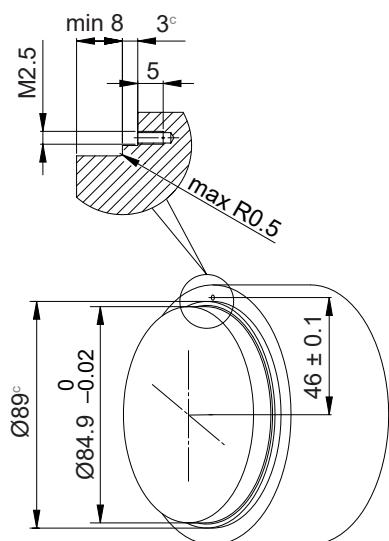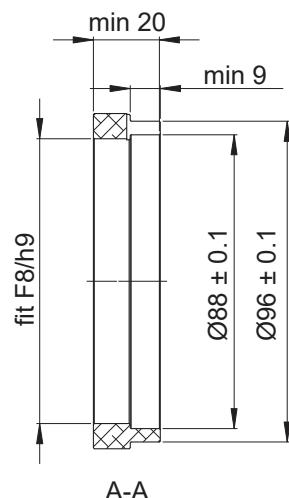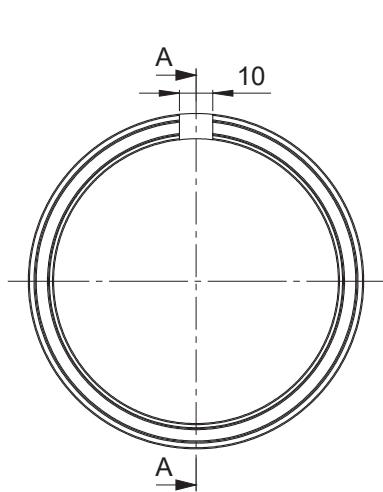**Shaft dimensions**

**Installation jig ACC021 recommended<sup>b</sup>**


<sup>b</sup> Ordered separately (see [Accessories part numbering](#)).

<sup>c</sup> Recommended for replacement purpose.




## Installation with fasteners

Installation with fasteners is possible for ring **MR122E**. Use clearance fit for installation with fasteners. Make sure the installation surface is clean and free of debris. Rings need to be attached with fasteners as per installation drawings (see appropriate ring page).

Recommended tightening torque:




- fasteners M3: 1 Nm
- fasteners M6: 8 Nm

**Variant A: Mounting part**

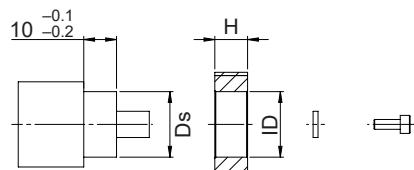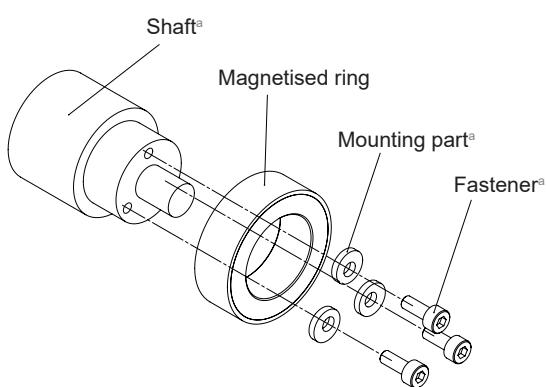

<sup>a</sup> Not provided.

**Variant B: Flange**

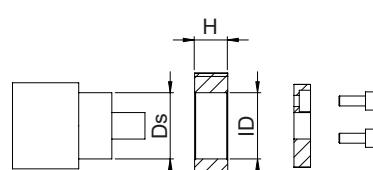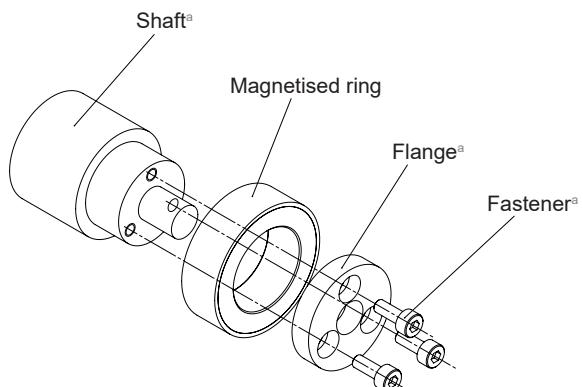

<sup>a</sup> Not provided.

# MR031G

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
50 poles, 2 mm pole length	Ri	Ri	-	No Ri	No Ri	Ri	Ri
20 poles, 5 mm pole length	-	-	Ri	-	-	-	-

Ri - Unique reference mark or only incremental track available  
No Ri - No reference mark option, only incremental track available

## Technical features

Pole length	2 mm	5 mm
Number of poles	50	20
System error	$\pm 0.16^\circ$	$\pm 0.50^\circ$ <sup>a</sup> $\pm 1.00^\circ$ <sup>b</sup>
Outer diameter	$31.0 \pm 0.1$ mm <sup>c</sup> $31.2 \pm 0.1$ mm <sup>d</sup>	$31.85 \pm 0.1$ mm <sup>c</sup> $32.05 \pm 0.1$ mm <sup>d</sup>
Moment of inertia	$4.12 \times 10^{-6}$ kgm <sup>2</sup>	$4.37 \times 10^{-6}$ kgm <sup>2</sup>
Mass	24 g	26 g

Inner diameter	20 H7 mm
Height	$8 \pm 0.1$ mm
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4021 / AISI 420
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6}$ K <sup>-1</sup>
Protective foil option	Yes



<sup>a</sup> 1 mm ride height  
<sup>b</sup> 2.5 mm ride height  
<sup>c</sup> without protective foil  
<sup>d</sup> with protective foil

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.

RLC2IC

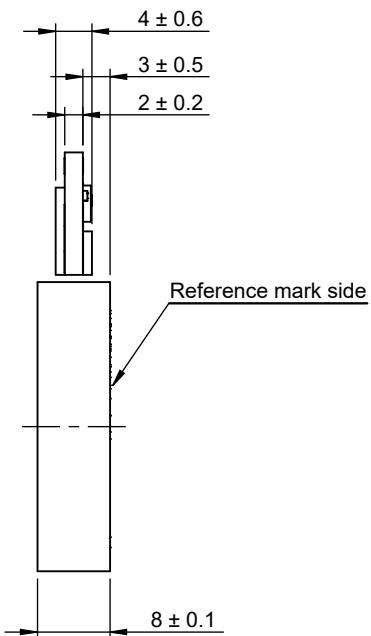
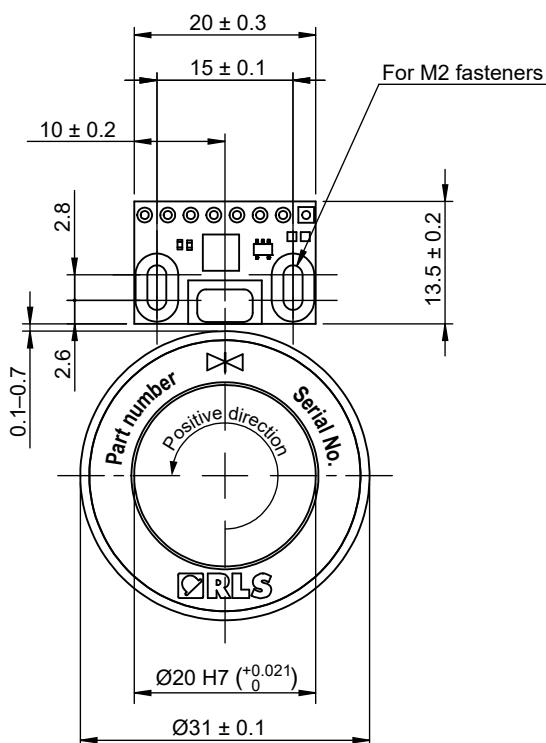


# MR031G



RLM

**Outer diameter:**  $31.0 \pm 0.1$  mm /  
 $31.85 \pm 0.1$  mm

**Inner diameter:** 20 H7 mm  
**Number of poles:** 50 / 20

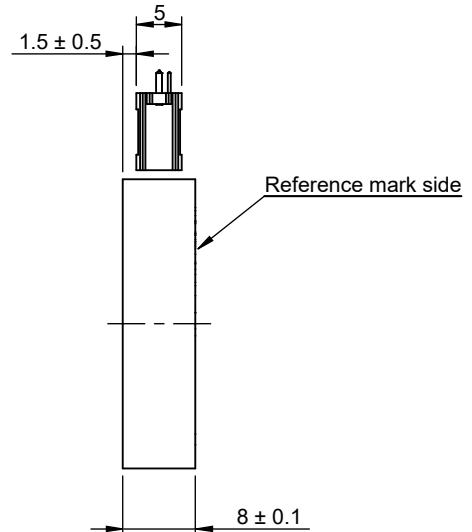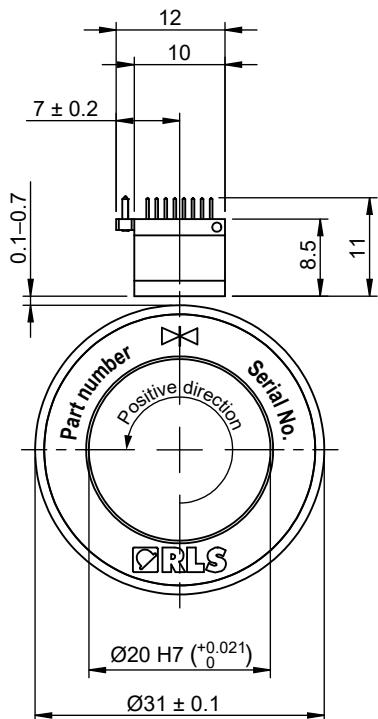

RLB

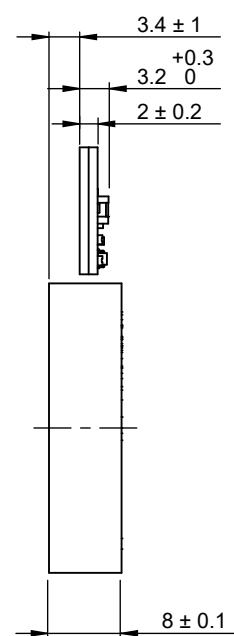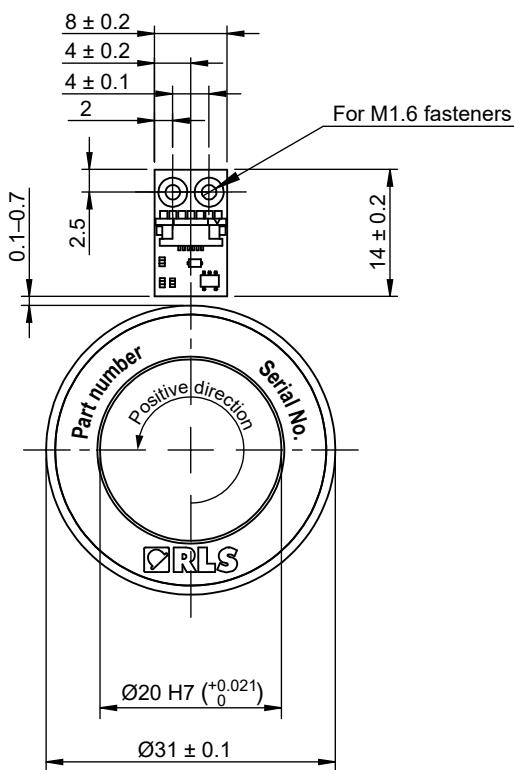


# MR031G


RLC2HD

**Outer diameter:**  $31.0 \pm 0.1$  mm /  
 $31.85 \pm 0.1$  mm

**Inner diameter:** 20 H7 mm  
**Number of poles:** 50 / 20

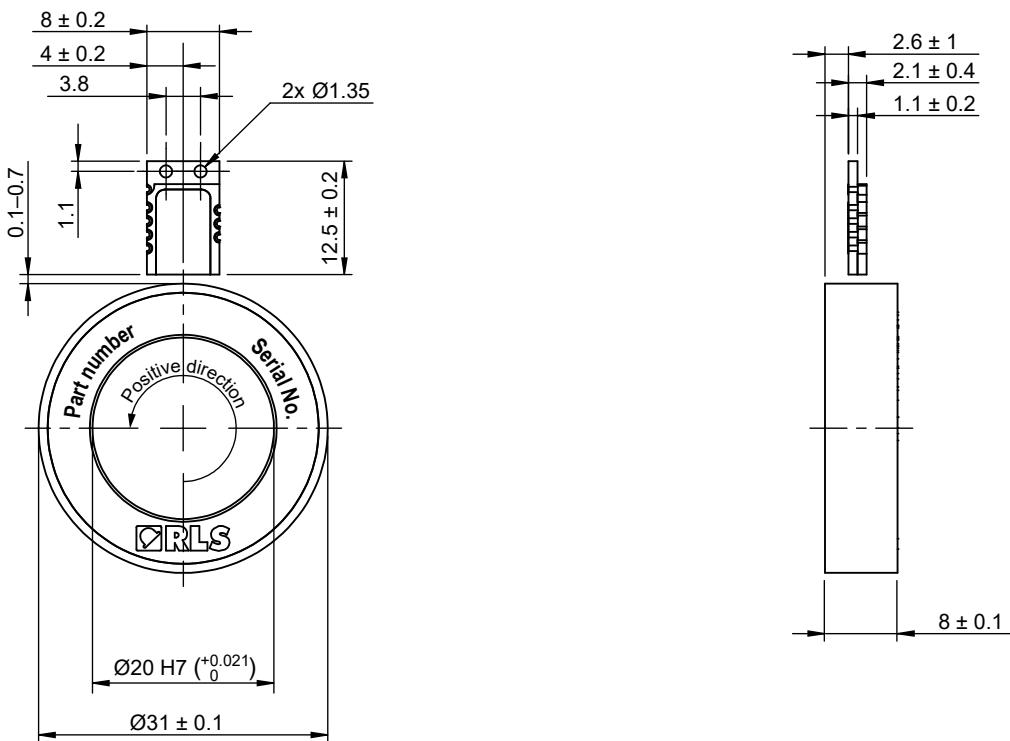



LM10/15

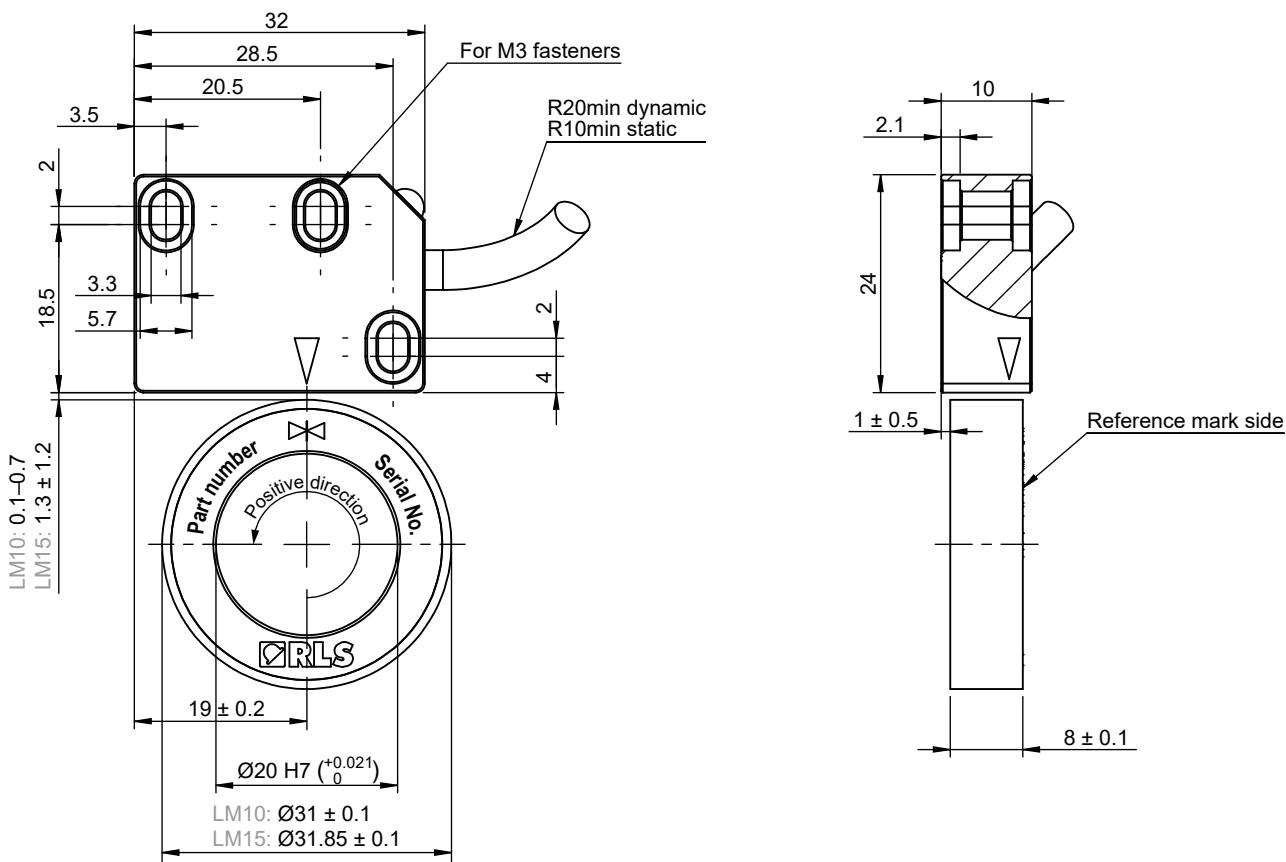

# MR031G

**Outer diameter:**  $31.0 \pm 0.1$  mm /  
 $31.85 \pm 0.1$  mm  
**Inner diameter:** 20 H7 mm  
**Number of poles:** 50 / 20

## LM13

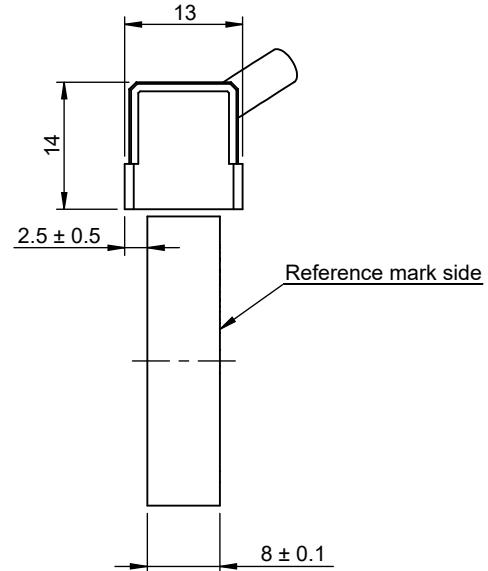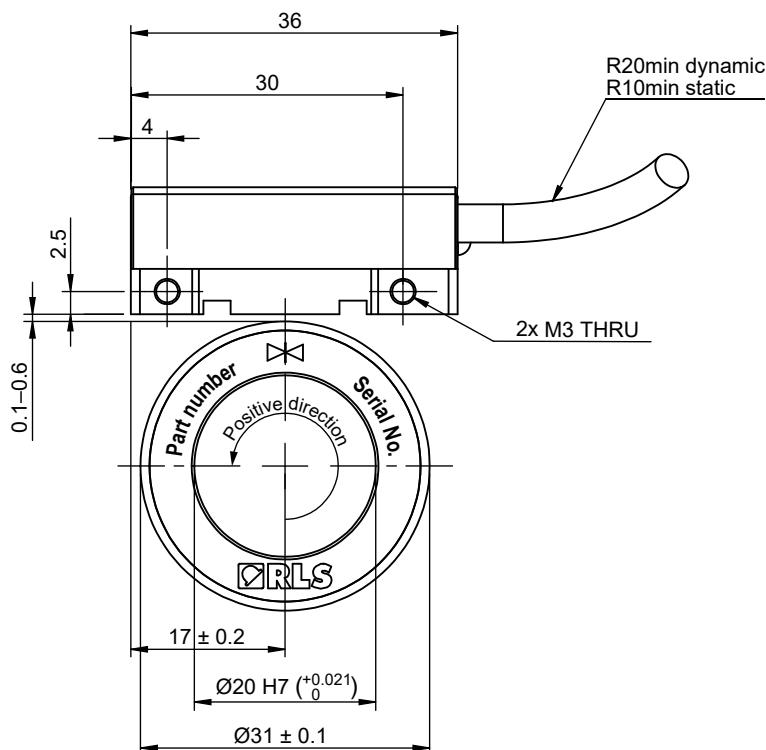



## SDE and crosstalk error

(typical measured value)



### Legend

- LM
- RoLin

50 poles, 2 mm width

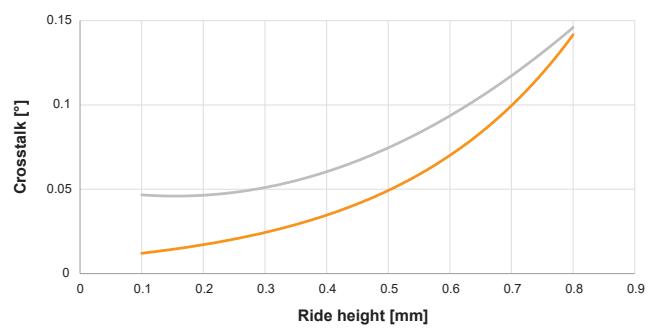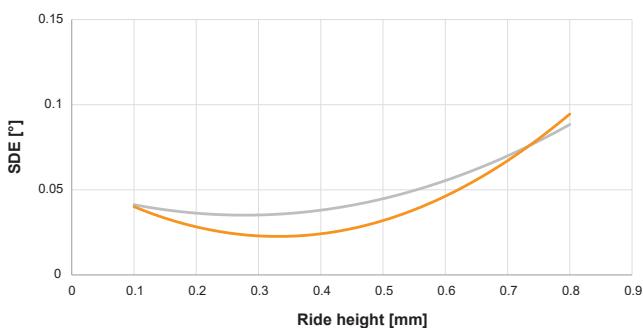

20 poles, 5 mm width

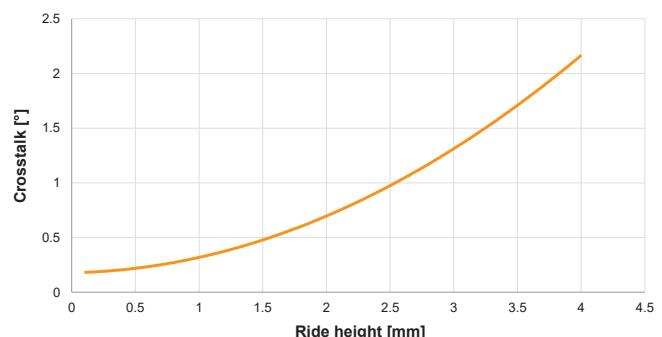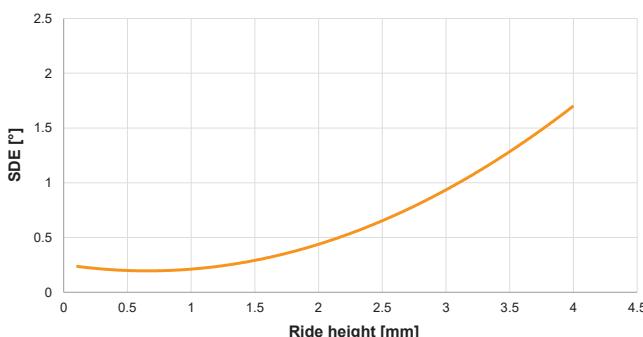

# MR040G

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
64 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM
26 poles, 5 mm pole length	-	-	Ri	-	-	-	-

Ri - Unique reference mark or only incremental track available

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Pole length	2 mm	5 mm
Number of poles	64	26
Basic increment of distance coded reference mark	32 mm / 90°	-
System error	±0.13°	±0.40° <sup>a</sup> ±0.80° <sup>b</sup>
Outer diameter	40.0 ± 0.1 mm <sup>c</sup> 40.2 ± 0.1 mm <sup>d</sup>	40.7 ± 0.1 mm <sup>c</sup> 40.9 ± 0.1 mm <sup>d</sup>
Moment of inertia	9.54 × 10 <sup>-6</sup> kgm <sup>2</sup>	1.01 × 10 <sup>-5</sup> kgm <sup>2</sup>
Mass	30 g	32 g

Inner diameter	30 H7 mm
Height	8 ± 0.1 mm
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4021 / AISI 420
Hub thermal expansion coefficient (CTE)	11 × 10 <sup>-6</sup> K <sup>-1</sup>
Protective foil option	Yes

<sup>a</sup> 1 mm ride height

<sup>b</sup> 2.5 mm ride height

<sup>c</sup> without protective foil



<sup>d</sup> with protective foil

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.



RLC2IC

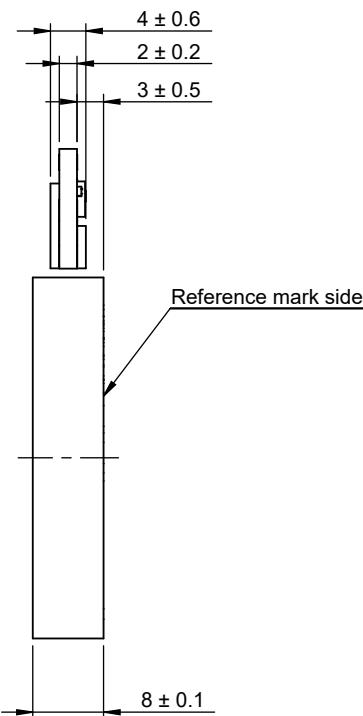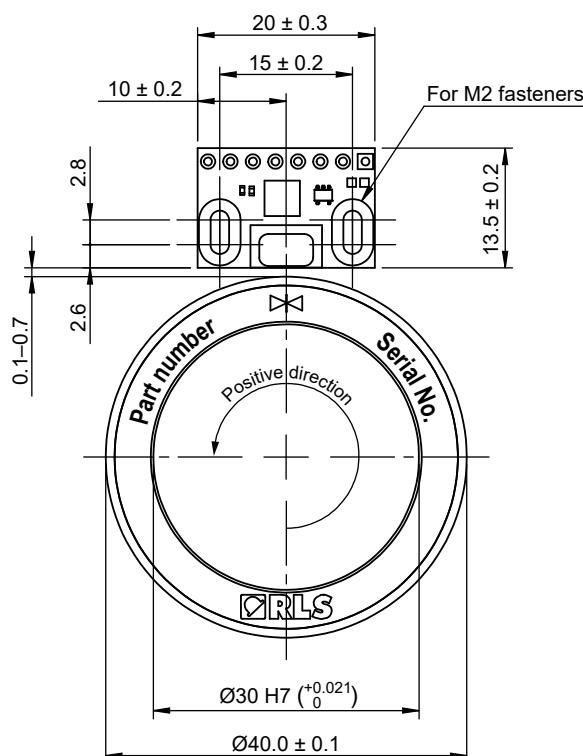



# MR040G

**Outer diameter:**  $40.0 \pm 0.1$  mm /  
 $40.7 \pm 0.1$  mm  
**Inner diameter:** 30 H7 mm  
**Number of poles:** 64 / 26

RLM

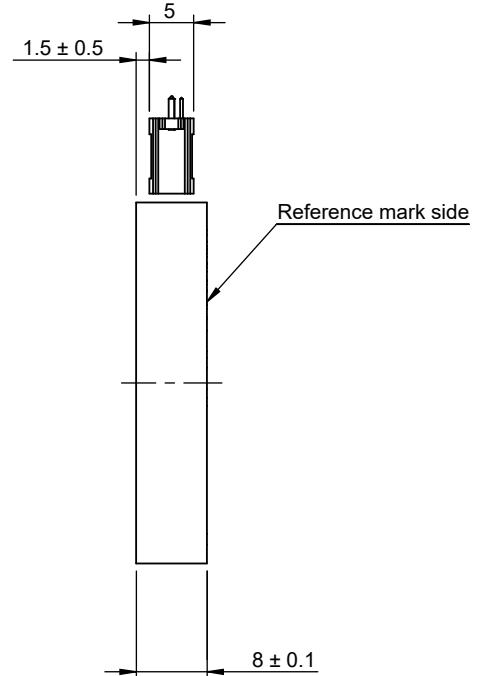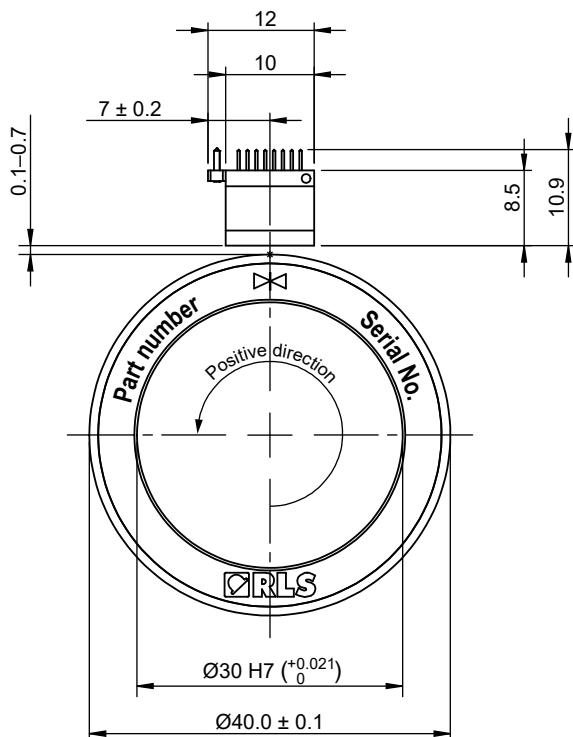



RLB

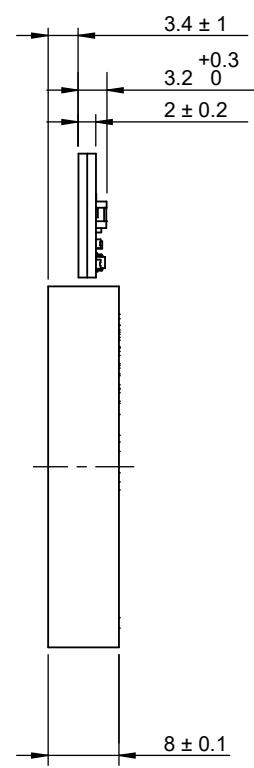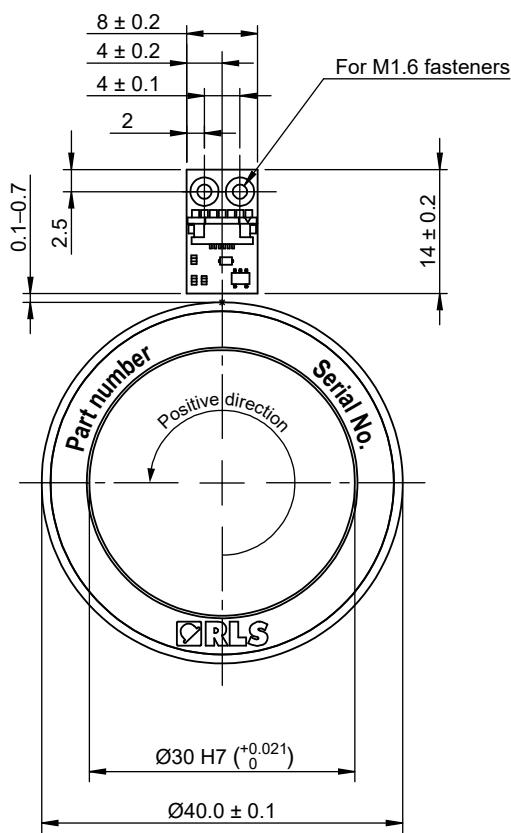



# MR040G

**Outer diameter:**  $40.0 \pm 0.1$  mm /  
 $40.7 \pm 0.1$  mm  
**Inner diameter:** 30 H7 mm  
**Number of poles:** 64 / 26

RLC2HD

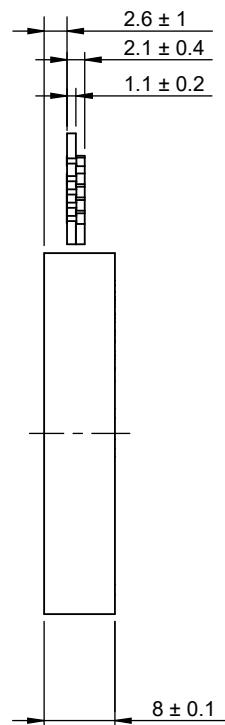
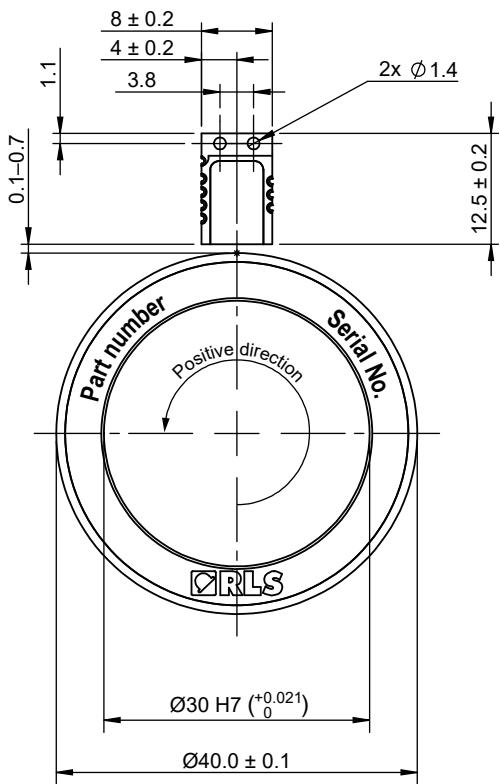


LM10/15

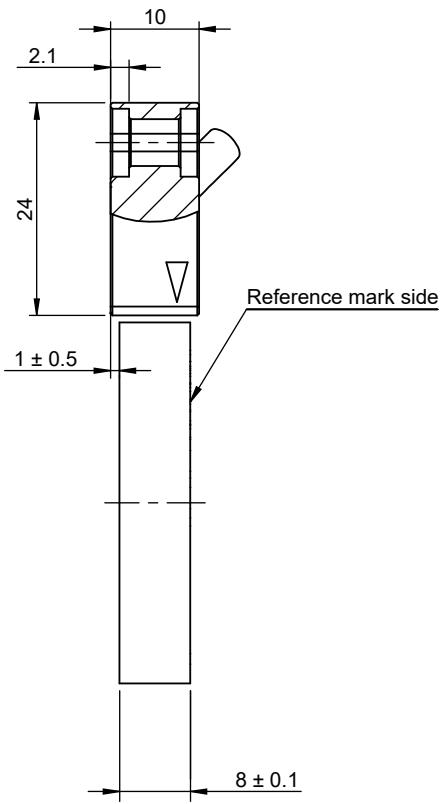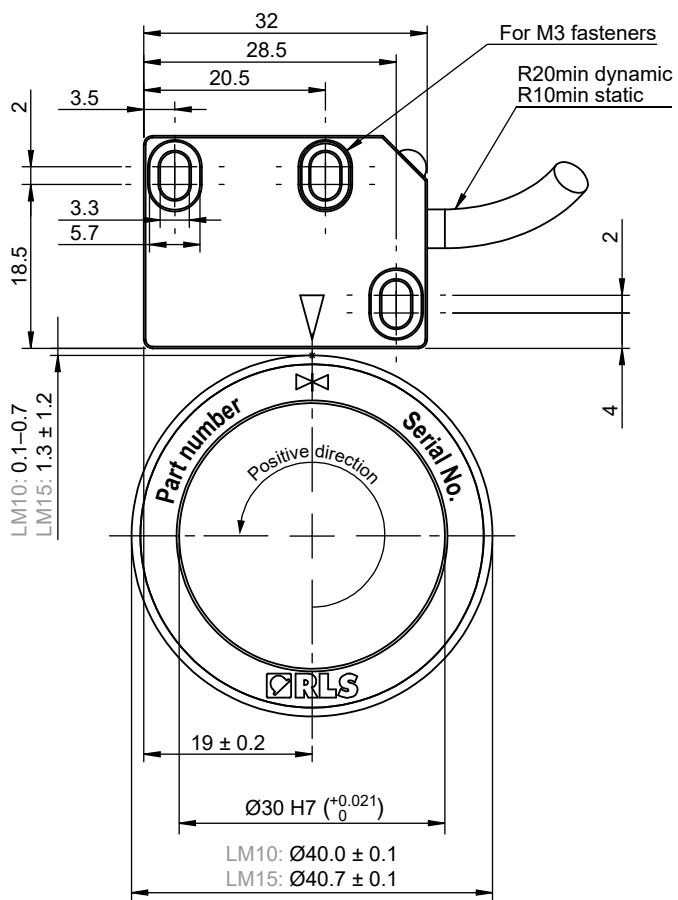

# MR040G

LM13

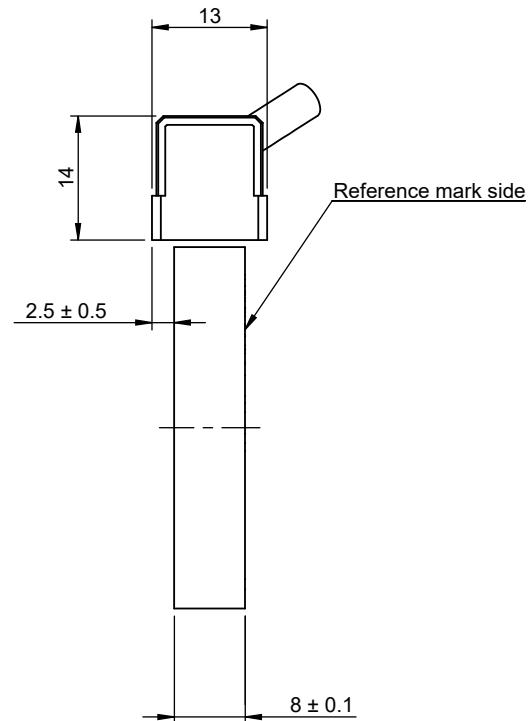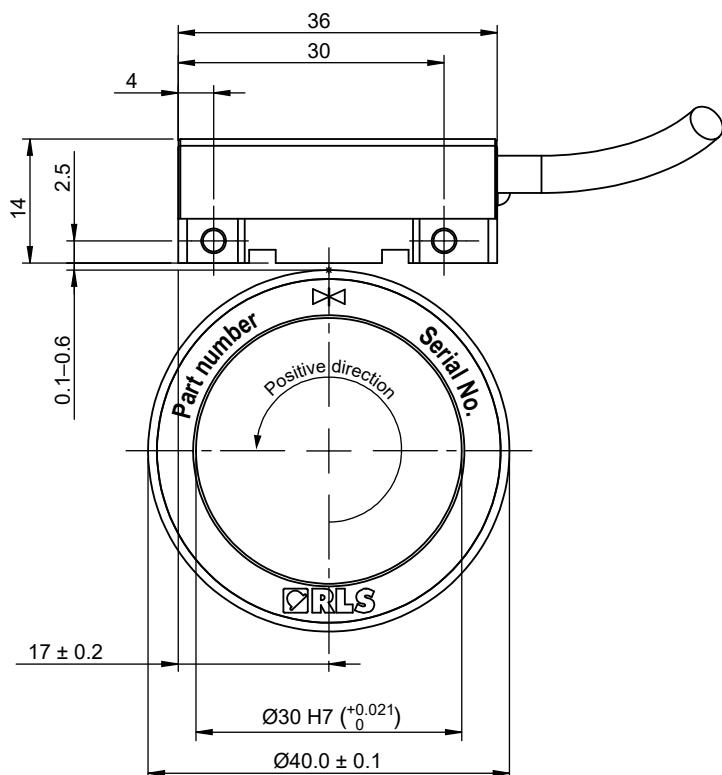



## SDE and crosstalk error

(typical measured value)



### Legend

- LM
- RoLin

### 64 poles, 2 mm width

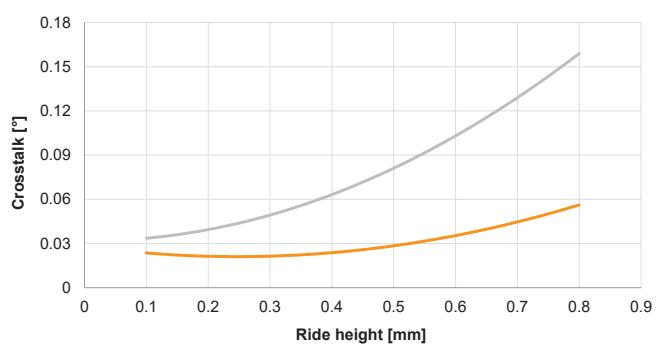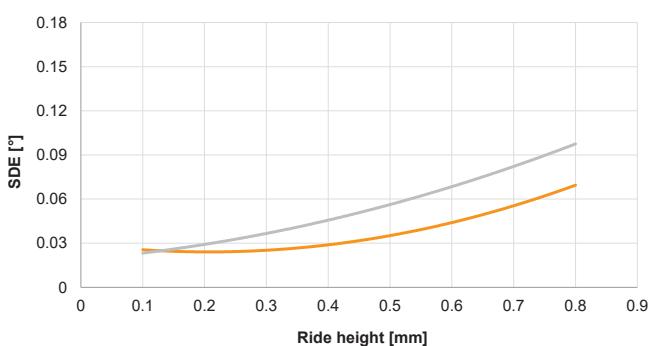

### 26 poles, 5 mm width

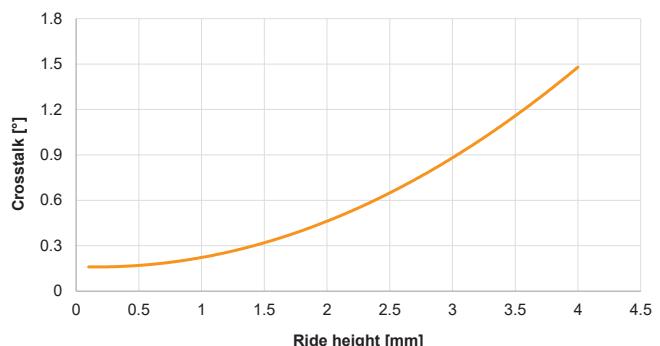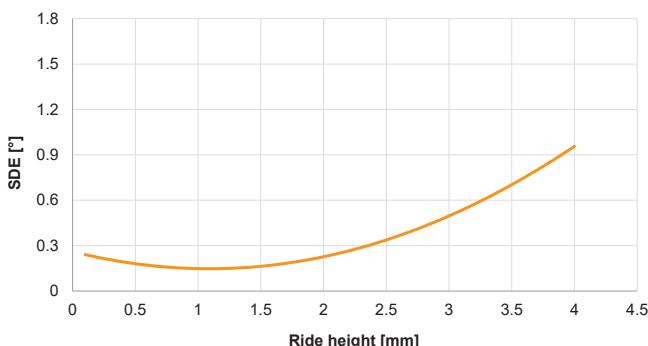

# MR047B

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
76 poles, 2 mm pole length	No Ri	No Ri	-	No Ri	No Ri	Ri	Ri

Ri - Unique reference mark or only incremental track available  
No Ri - No reference mark option, only incremental track available

## Technical features

Outer diameter	47.5 ± 0.1 mm
Inner diameter	40 ± 0.1 mm
Installation diameter	44 ± 0.02 mm
Height	5.5 ± 0.1 mm
Mass	8 g
Moment of inertia	$4.31 \times 10^{-6}$ kgm <sup>2</sup>
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4016 / AISI 430
Hub thermal expansion coefficient (CTE)	$10 \times 10^{-6}$ K <sup>-1</sup>
Protective foil option	No


Pole length	2 mm
Number of poles	76
System error	±0.11°

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.


RLC2IC

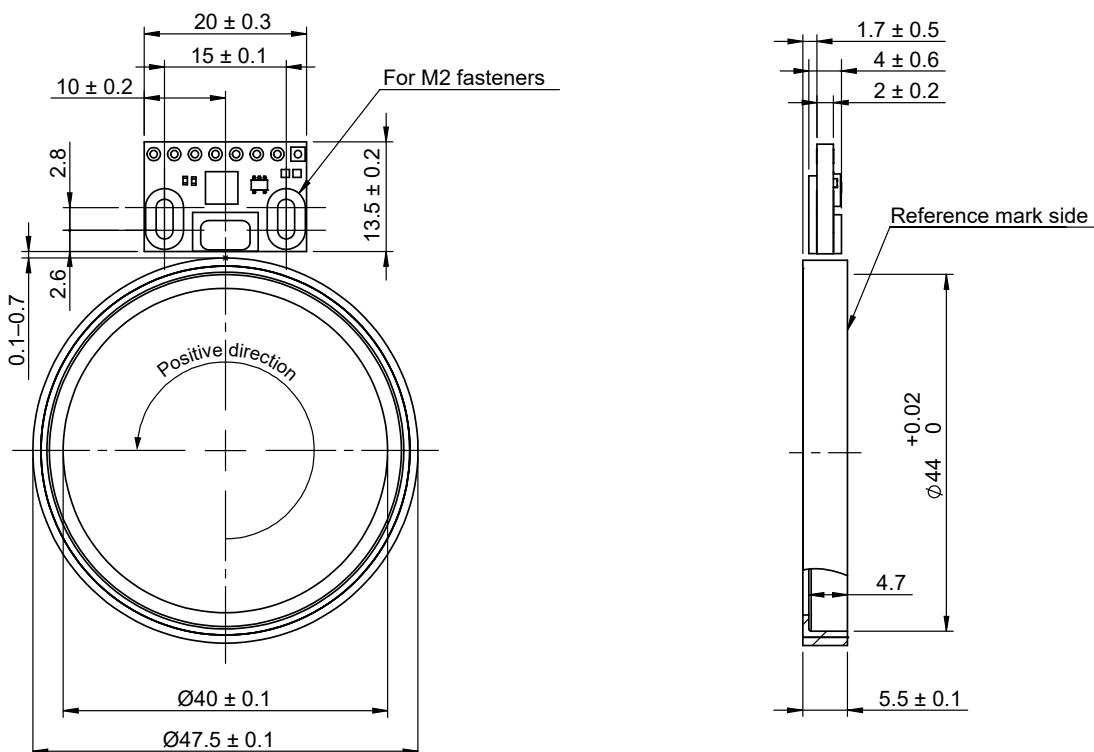


**MR047B**

**Outer diameter:**  $47.5 \pm 0.1$  mm  
**Inner diameter:**  $40 \pm 0.1$  mm  
**Number of poles:** 76

RLM

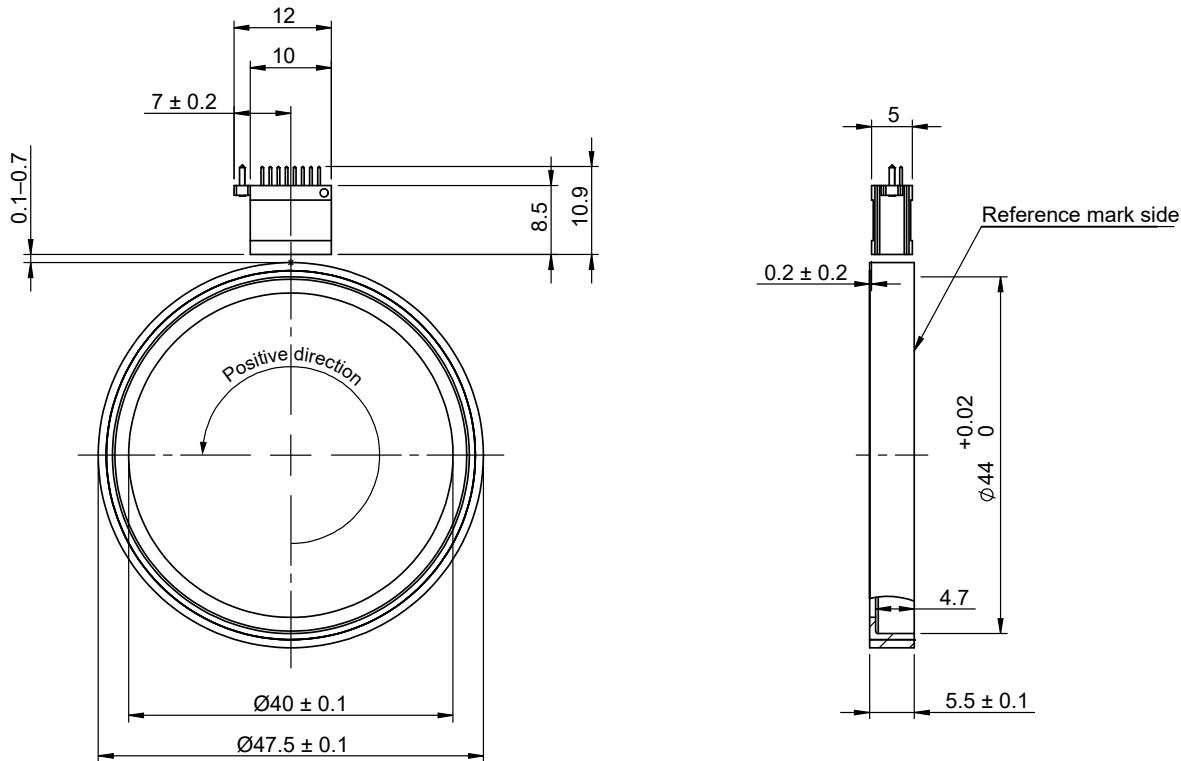


RLB

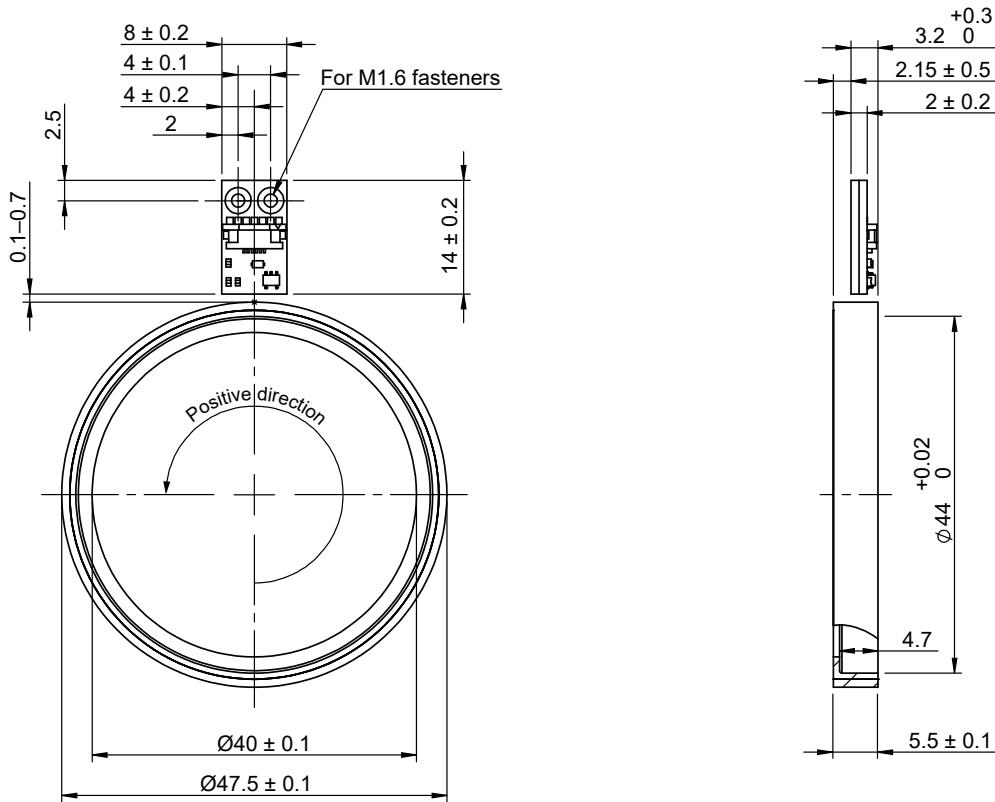


# MR047B

Outer diameter:  $47.5 \pm 0.1$  mm  
Inner diameter:  $40 \pm 0.1$  mm  
Number of poles: 76

RLC2HD

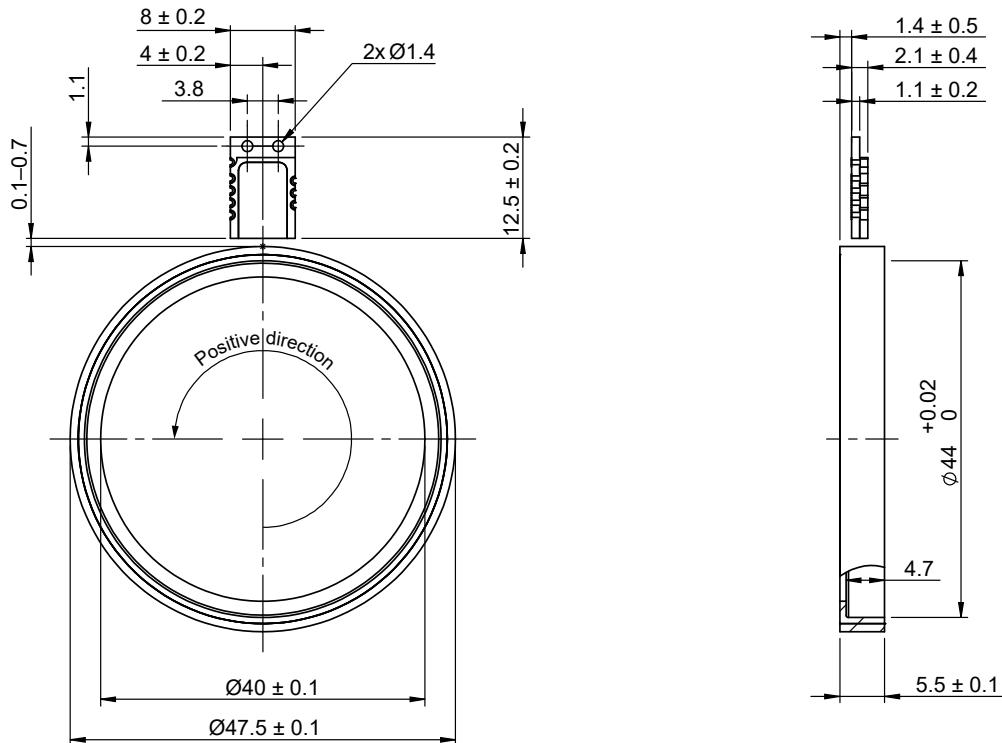


LM10

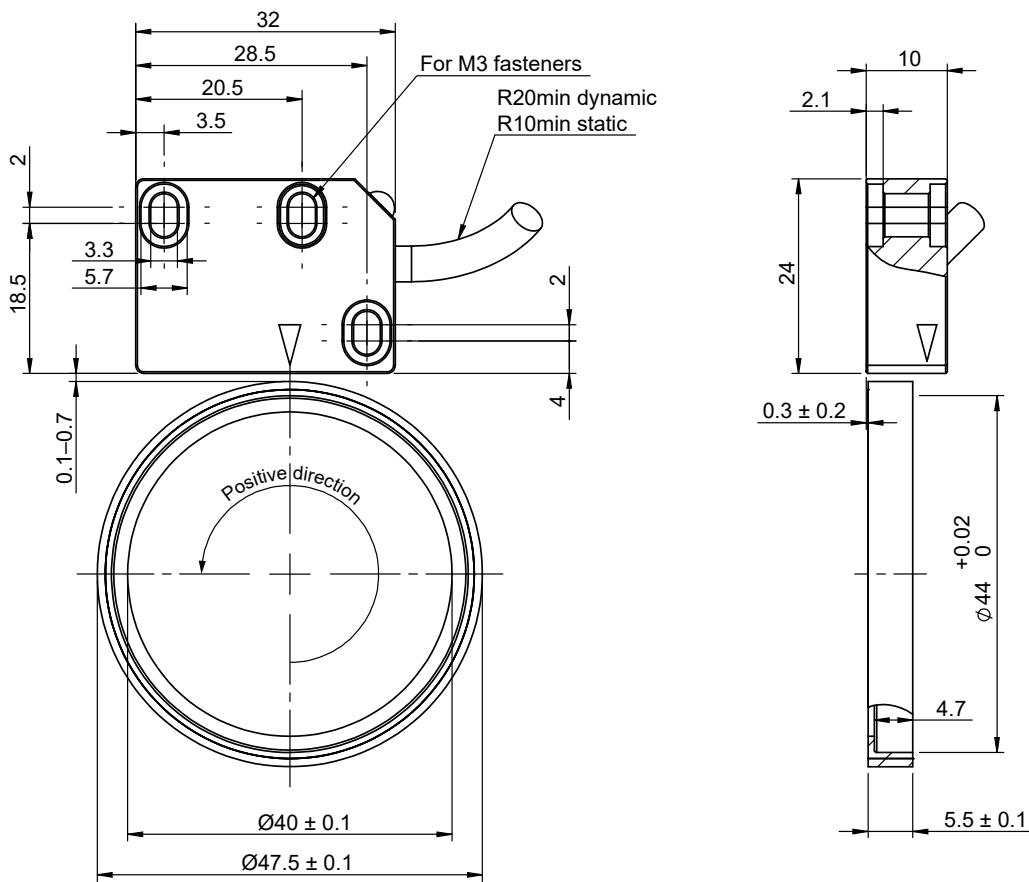

**MR047B**

**Outer diameter:**  $47.5 \pm 0.1$  mm  
**Inner diameter:**  $40 \pm 0.1$  mm  
**Number of poles:** 76

LM13

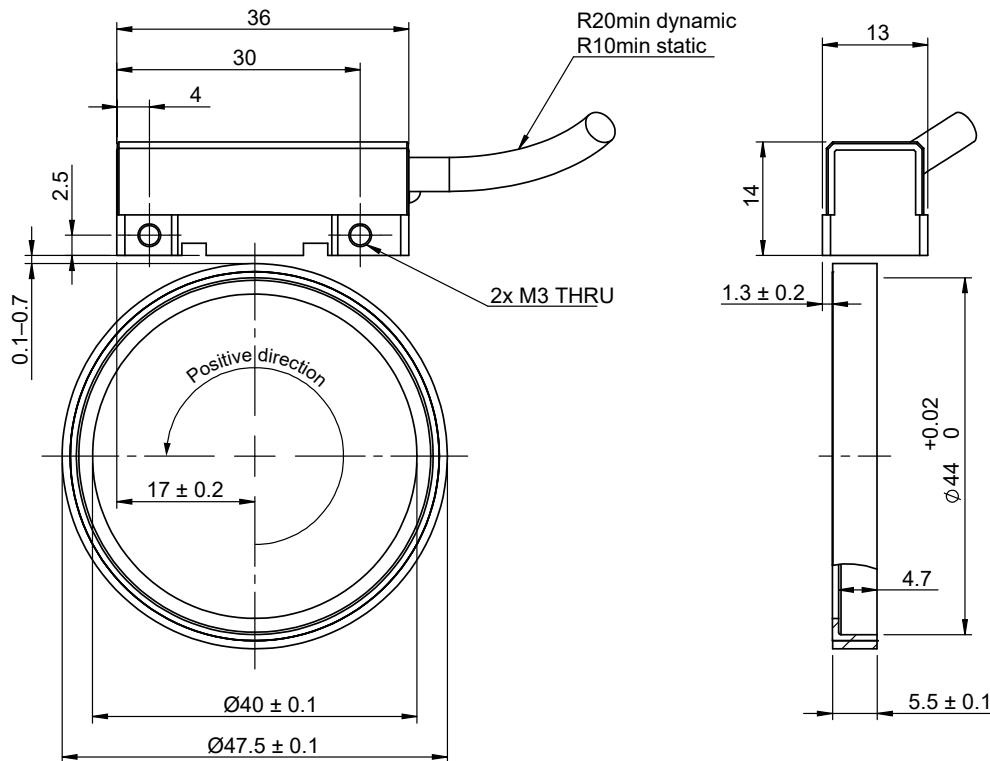

## SDE and crosstalk error



(typical measured value)

## Legend

LM

RoLin

76 poles, 2 mm width

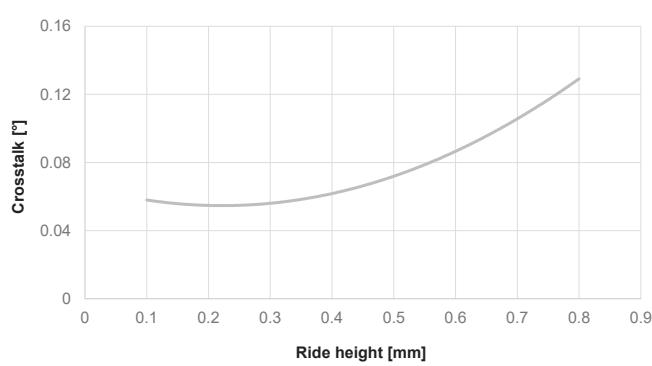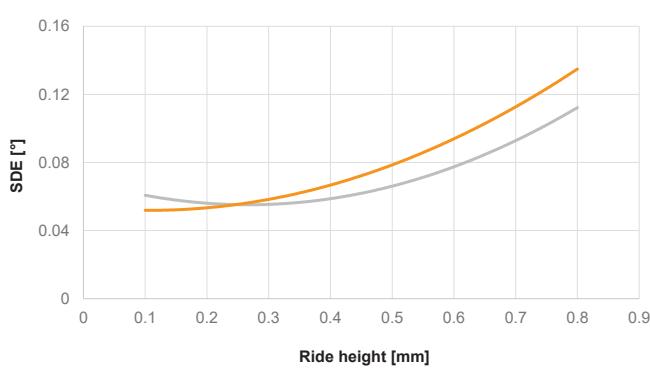

# MR050E

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
80 poles, 2 mm pole length	Ri	Ri	-	No Ri	No Ri	Ri	Ri
32 poles, 5 mm pole length	-	-	Ri	-	-	-	-

Ri - Unique reference mark or only incremental track available  
No Ri - No reference mark option, only incremental track available

## Technical features

Outer diameter	$50.1 \pm 0.1 \text{ mm}^{\text{c}}$ $50.3 \pm 0.1 \text{ mm}^{\text{d}}$
Inner diameter	40 H7 mm
Height	$10 \pm 0.1 \text{ mm}$
Mass	47 g
Moment of inertia	$2.43 \times 10^{-5} \text{ kgm}^2$
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4021 / AISI 420
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6} \text{ K}^{-1}$
Protective foil option	Yes

Pole length	2 mm	5 mm
Number of poles	80	32
System error	$\pm 0.10^\circ$	$\pm 0.30^\circ{}^{\text{a}}$ $\pm 0.60^\circ{}^{\text{b}}$


<sup>a</sup> 1 mm ride height  
<sup>b</sup> 2.5 mm ride height  
<sup>c</sup> without protective foil  
<sup>d</sup> with protective foil

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.


RLC2IC

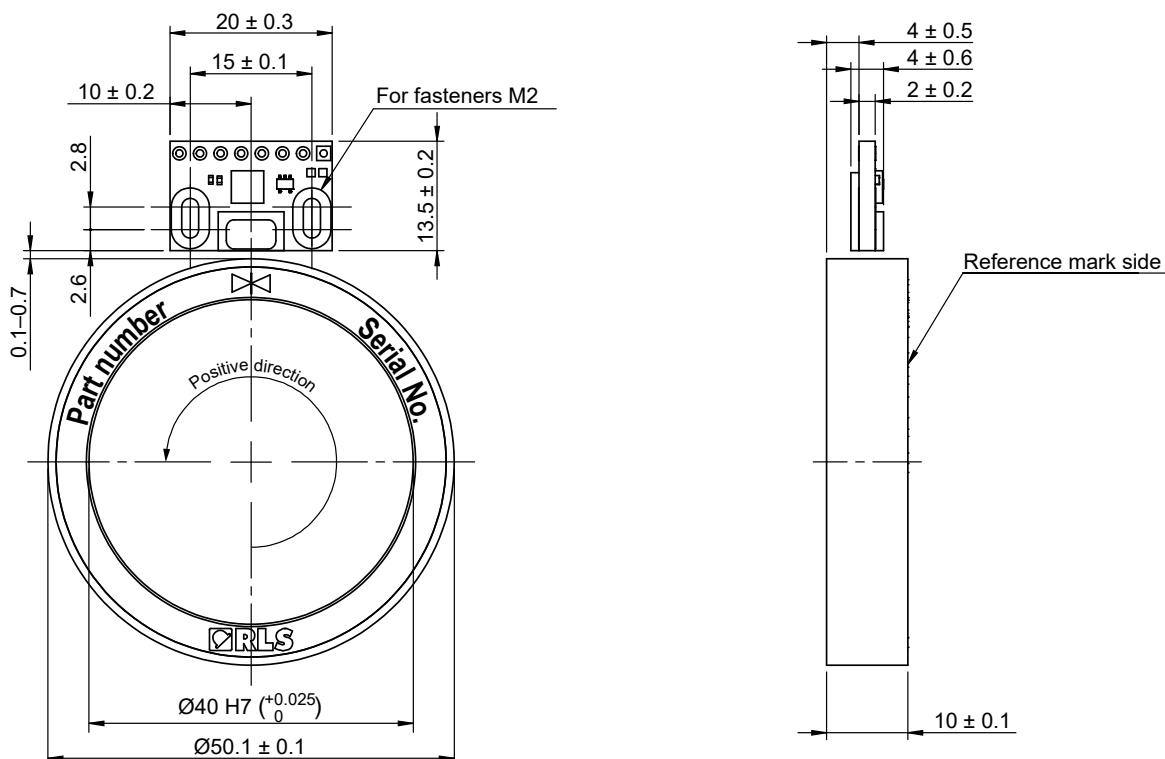


# MR050E

Outer diameter:  $50.1 \pm 0.1$  mm  
 Inner diameter: 40 H7 mm  
 Number of poles: 80 / 32

**RLM**

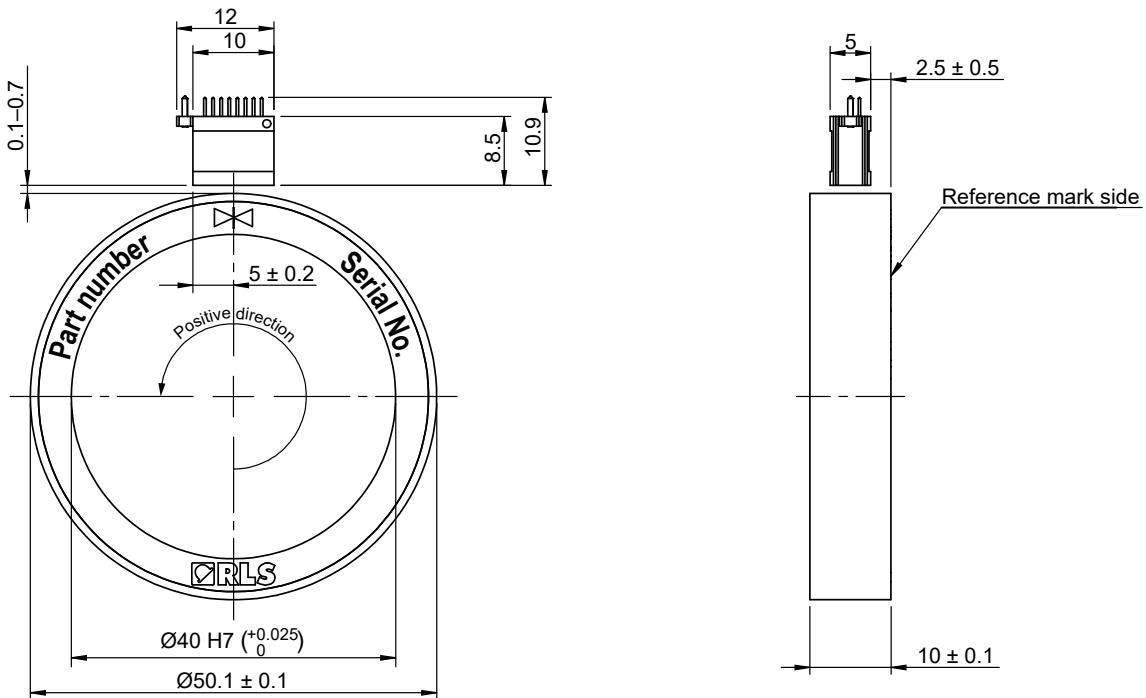


**RLB**

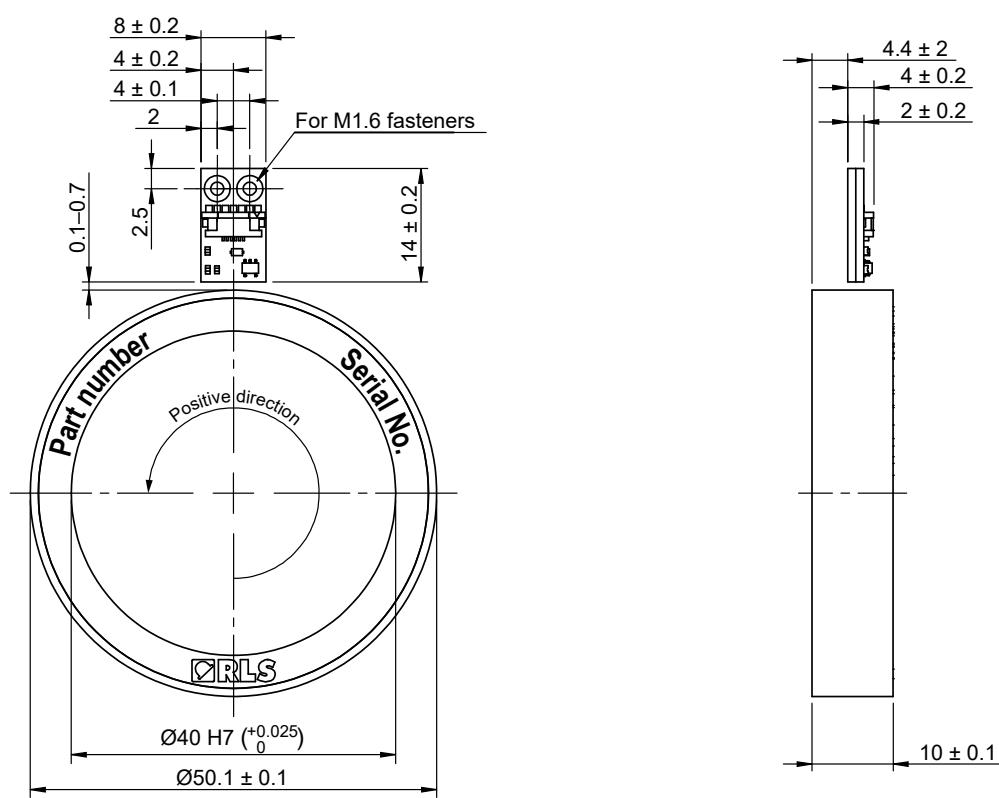


# MR050E

Outer diameter:  $50.1 \pm 0.1$  mm  
Inner diameter: 40 H7 mm  
Number of poles: 80 / 32

RLC2HD

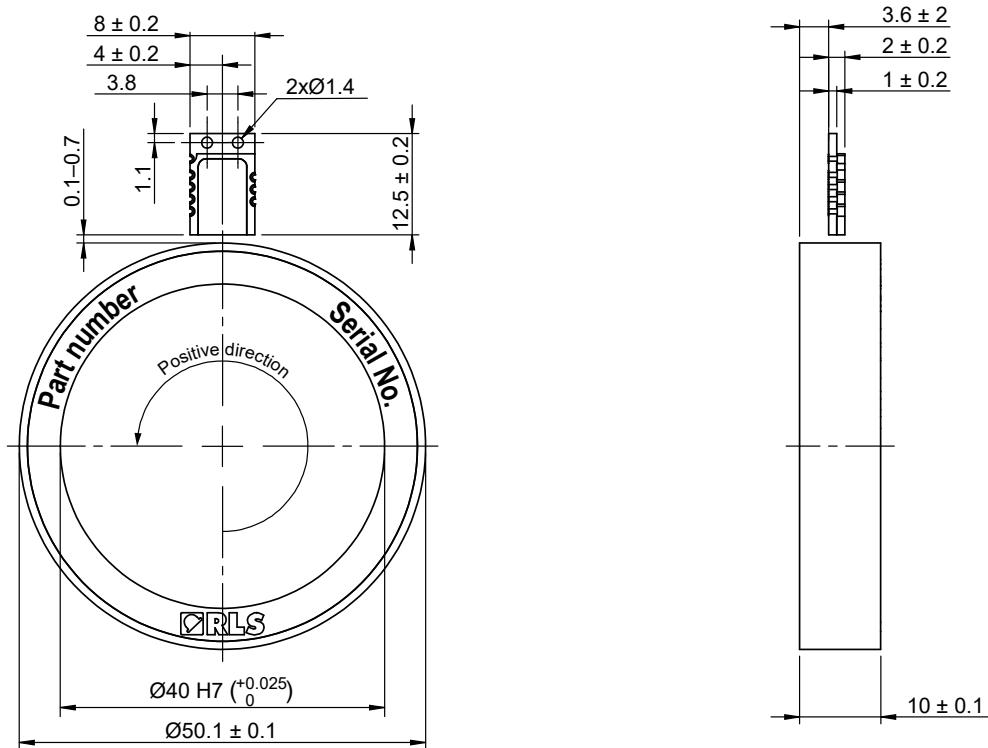


LM10/15

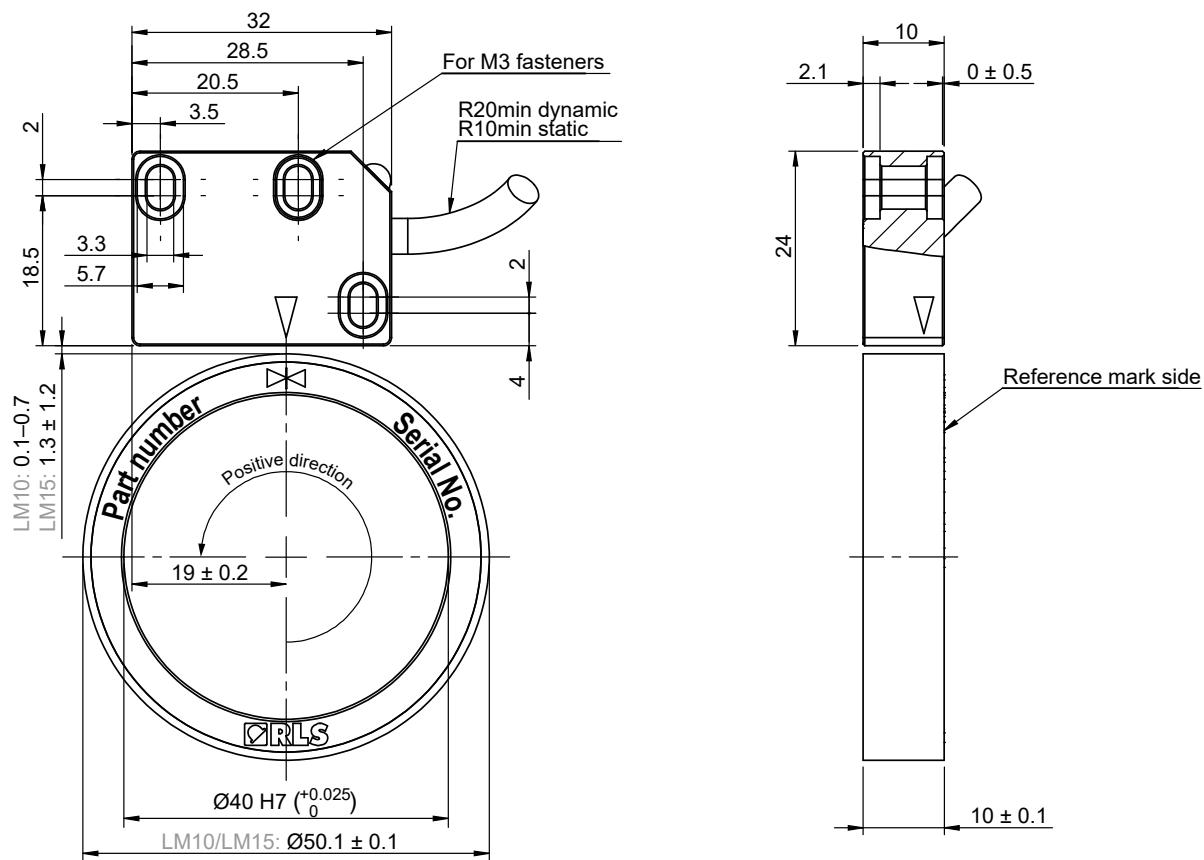

# MR050E

Outer diameter:  $50.1 \pm 0.1$  mm  
 Inner diameter: 40 H7 mm  
 Number of poles: 80 / 32

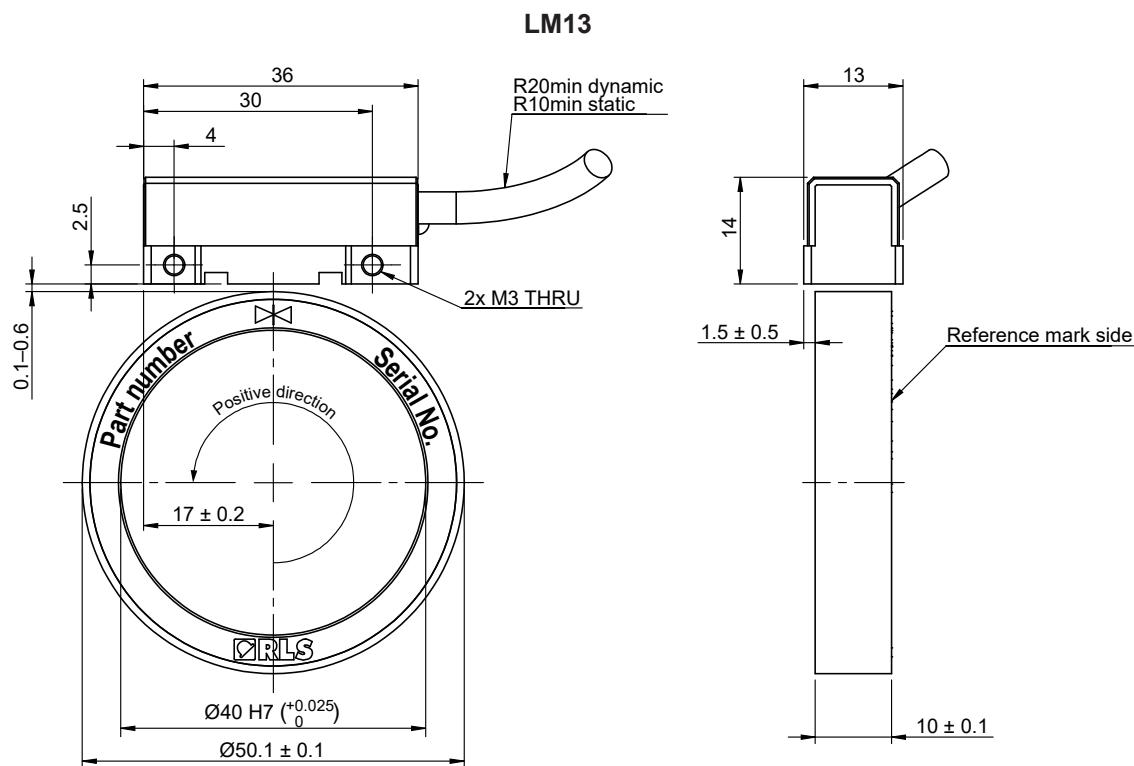



## SDE and crosstalk error

(typical measured value)



### Legend

- LM
- RoLin

### 80 poles, 2 mm width

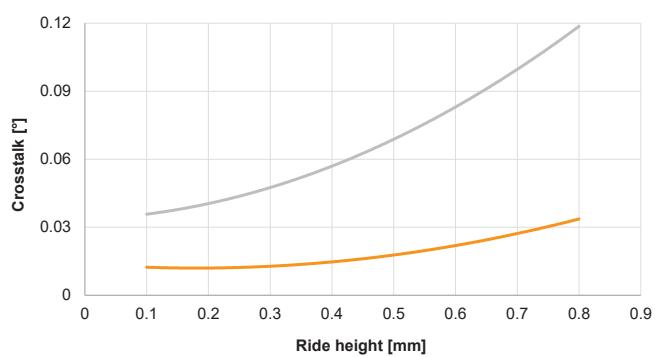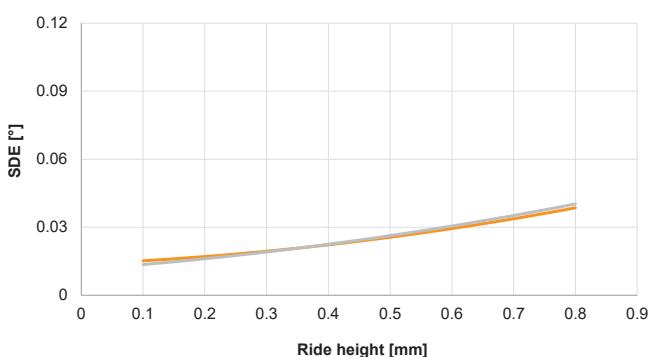

### 32 poles, 5 mm width

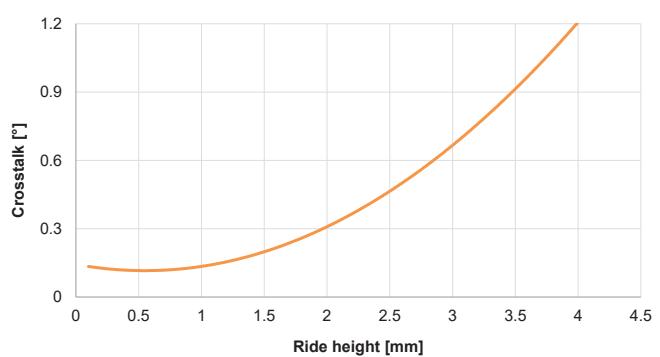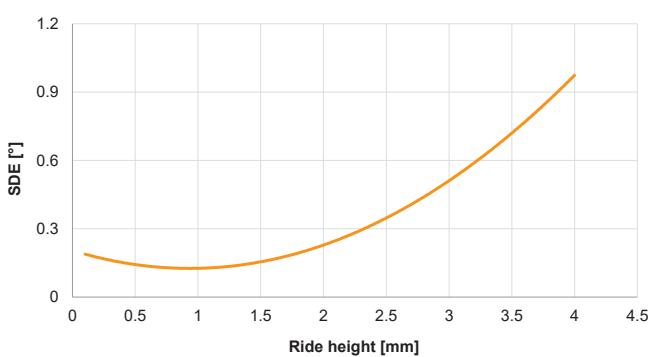

# MR057E

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
90 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM
36 poles, 5 mm pole length	-	-	Ri+DCRM	-	-	-	-

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Pole length	2 mm	5 mm
Number of poles	90	36
Basic increment of distance coded reference mark	36 mm / 72°	60 mm / 120°
System error	±0.09°	±0.28° <sup>a</sup> ±0.56° <sup>b</sup>
Outer diameter	56.5 ± 0.1 mm <sup>c</sup> 56.7 ± 0.1 mm <sup>d</sup>	57.3 ± 0.1 mm <sup>c</sup> 57.5 ± 0.1 mm <sup>d</sup>
Moment of inertia	$4.26 \times 10^{-5}$ kgm <sup>2</sup>	$4.47 \times 10^{-5}$ kgm <sup>2</sup>
Mass	65 g	67 g

Inner diameter	45 H7 mm
Height	10 ± 0.1 mm
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4021 / AISI 420
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6} \text{ K}^{-1}$
Protective foil option	Yes



<sup>a</sup> 1 mm ride height  
<sup>b</sup> 2.5 mm ride height  
<sup>c</sup> without protective foil  
<sup>d</sup> with protective foil

**NOTE:** For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.



RLC2IC

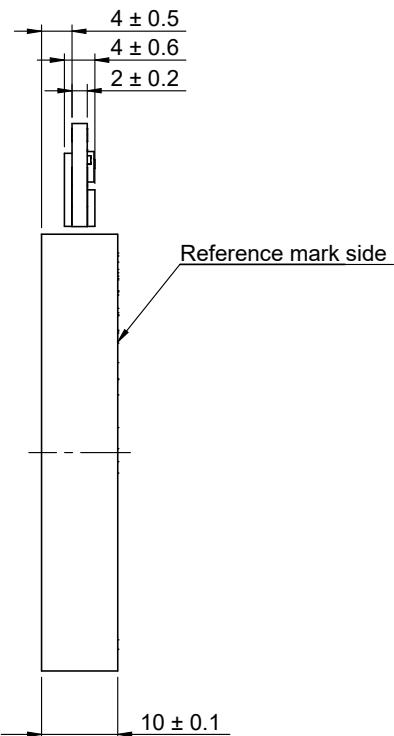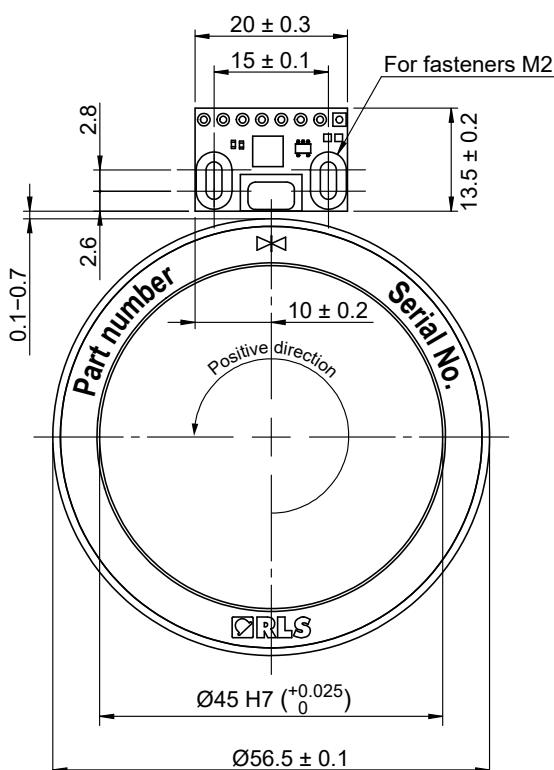



# MR057E

**Outer diameter:**  $56.5 \pm 0.1$  mm /  
 $57.3 \pm 0.1$  mm  
**Inner diameter:** 45 H7 mm  
**Number of poles:** 90 / 36

RLM

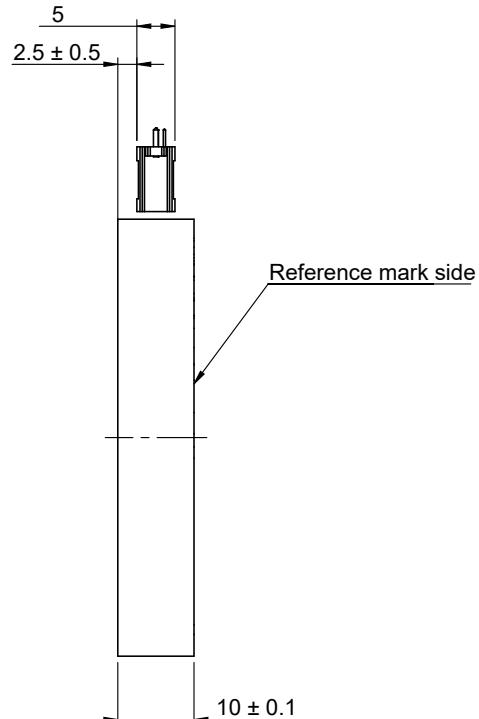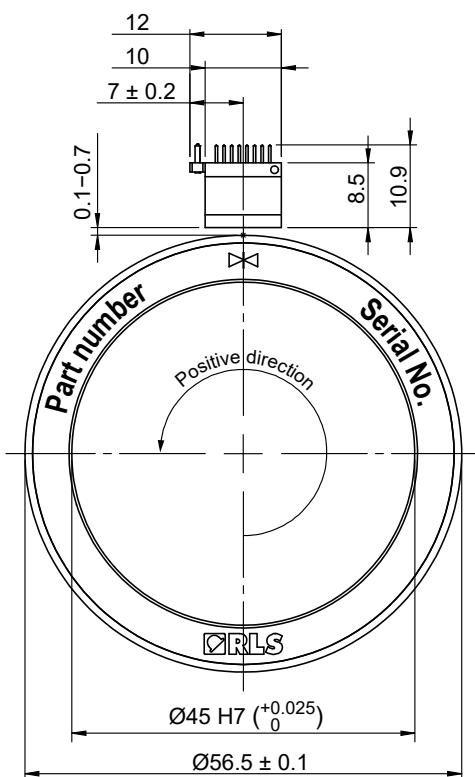


RLB

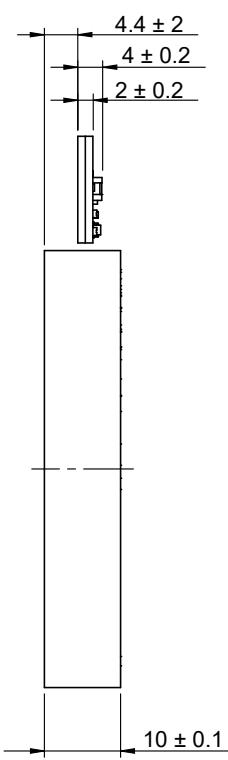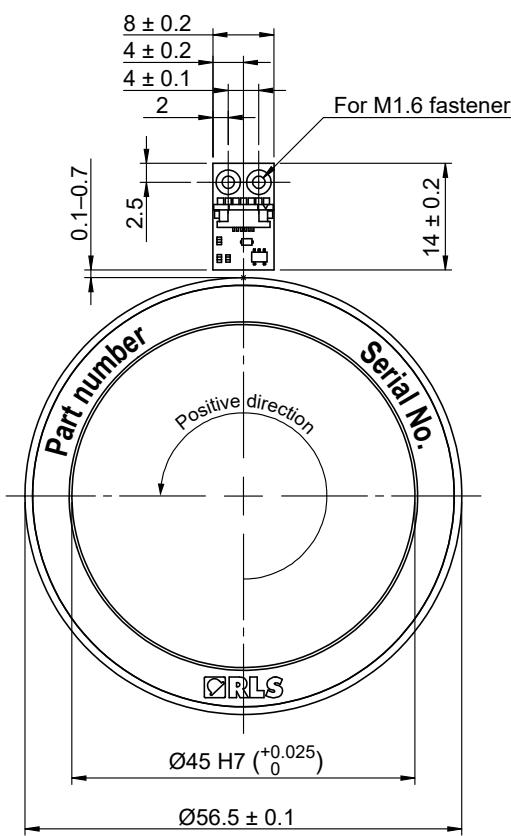


**MR057E**

**Outer diameter:**  $56.5 \pm 0.1$  mm /  
 $57.3 \pm 0.1$  mm  
**Inner diameter:** 45 H7 mm  
**Number of poles:** 90 / 36

RLC2HD

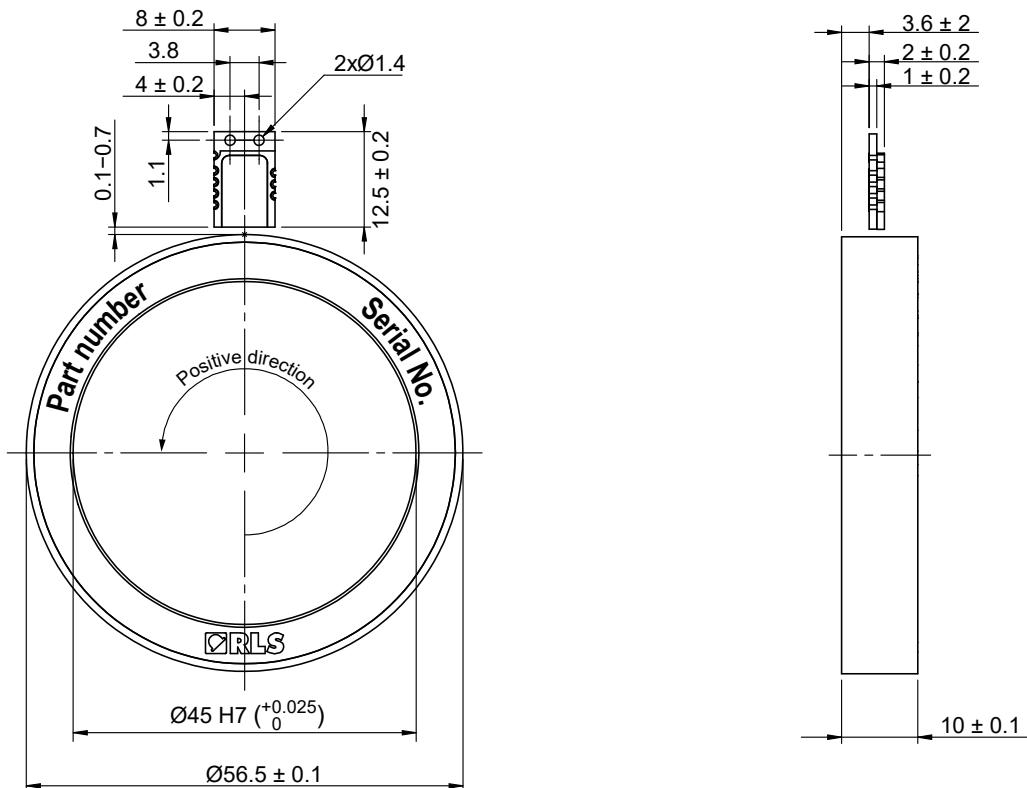


LM10/15

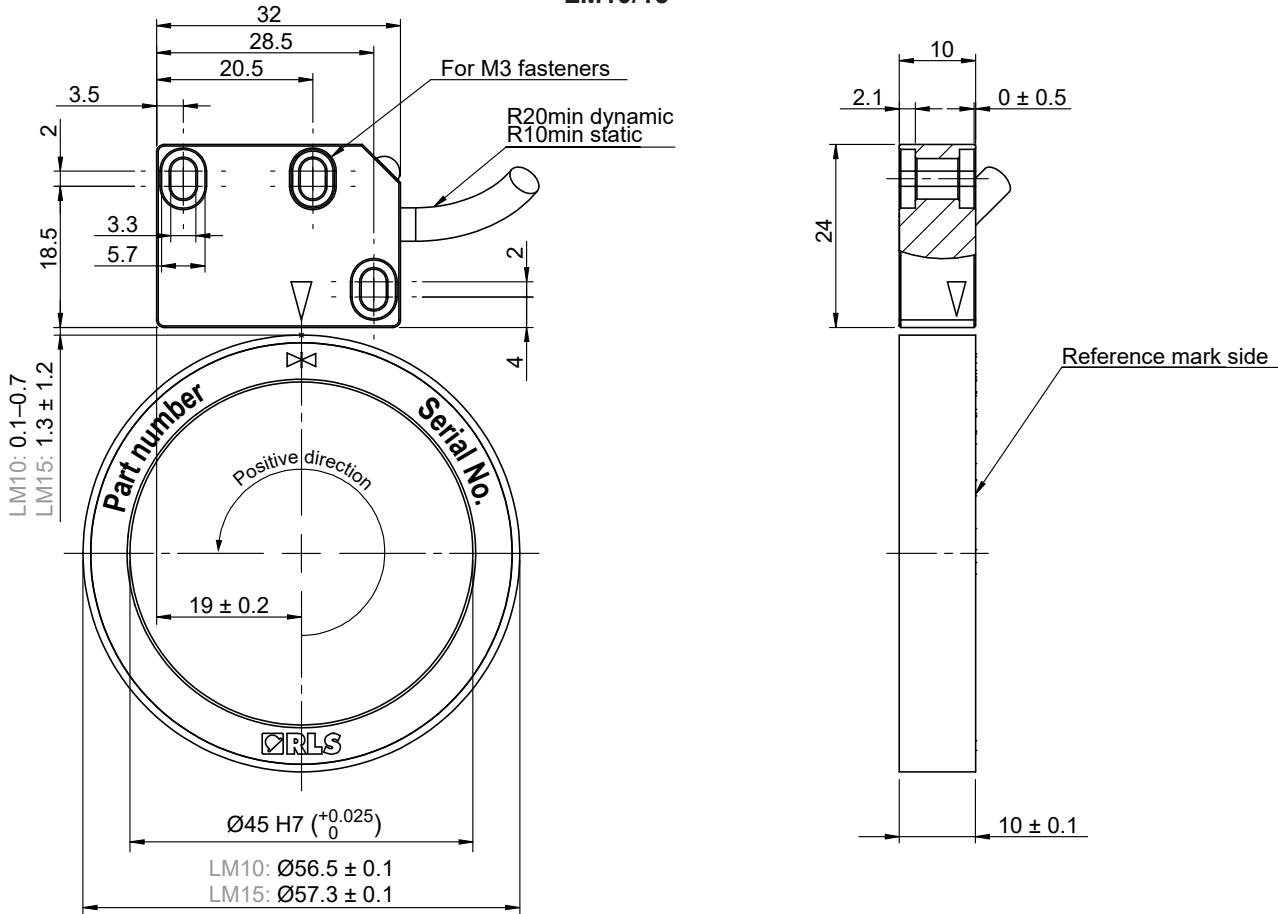

# MR057E

**Outer diameter:**  $56.5 \pm 0.1$  mm /  
 $57.3 \pm 0.1$  mm  
**Inner diameter:** 45 H7 mm  
**Number of poles:** 90 / 36

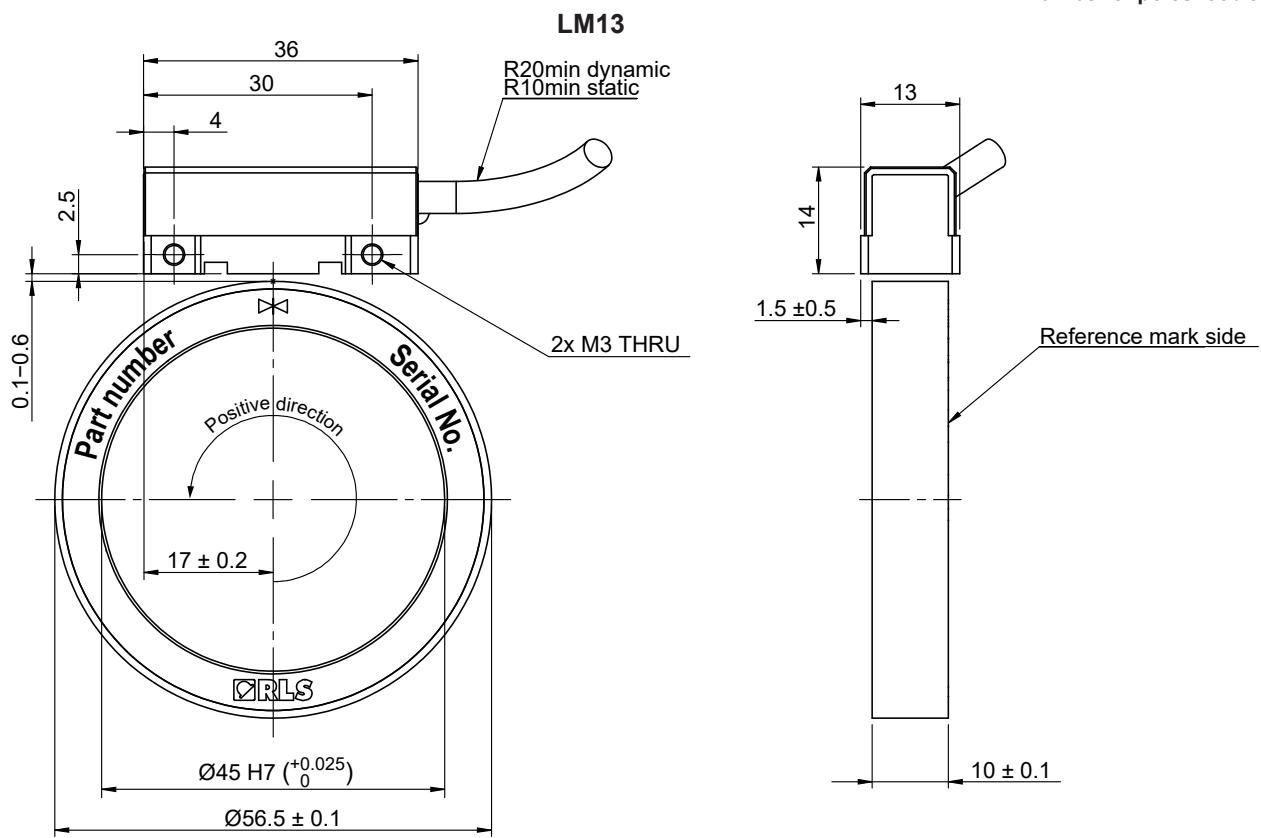



## SDE and crosstalk error

(typical measured value)



### Legend

- LM
- RoLin

### 90 poles, 2 mm width

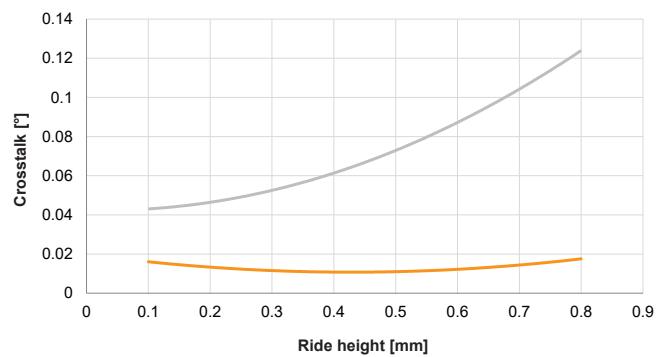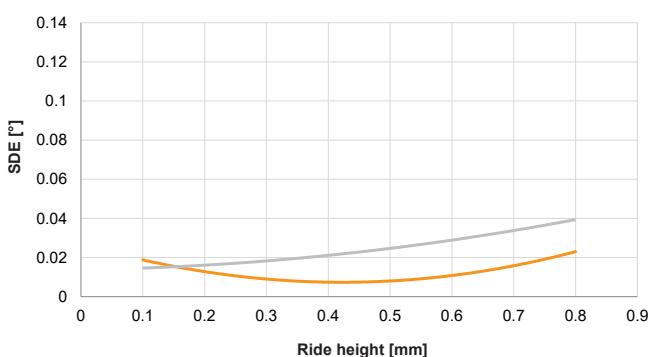

### 36 poles, 5 mm width

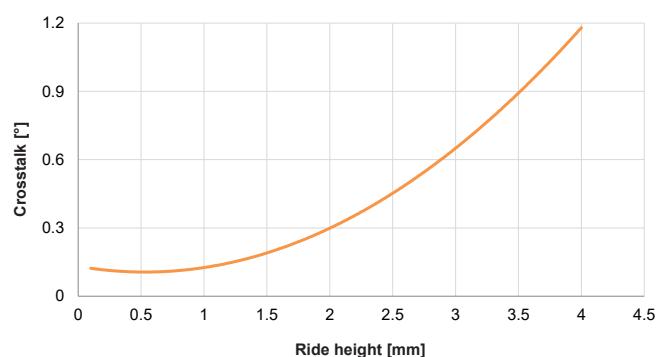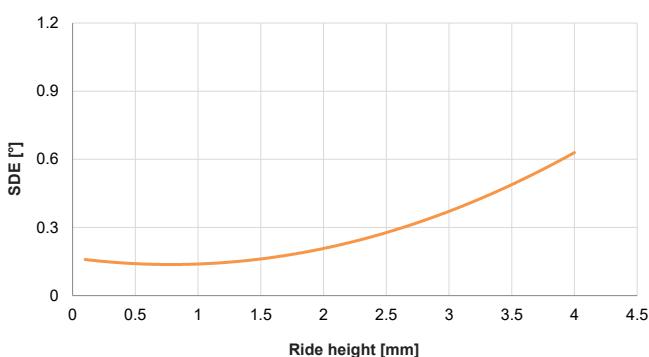

# MR057R

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
90 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Outer diameter	$57.5 \pm 0.1 \text{ mm}^{\text{c}}$ $57.7 \pm 0.1 \text{ mm}^{\text{d}}$
Inner diameter	$51 \pm 0.1 \text{ mm}$
Installation diameter	$53 \pm 0.02 \text{ mm}$
Height	$11 \pm 0.1 \text{ mm}$
Mass	26 g
Moment of inertia	$2.02 \times 10^{-5} \text{ kgm}^2$
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4104 / AISI 430F
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6} \text{ K}^{-1}$
Protective foil option	Yes

Pole length	2 mm
Number of poles	90
Basic increment of distance coded reference mark	36 mm / 72°
System error	$\pm 0.09^\circ$

<sup>c</sup> without protective foil



<sup>d</sup> with protective foil

**NOTE:** For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.



RLC2IC

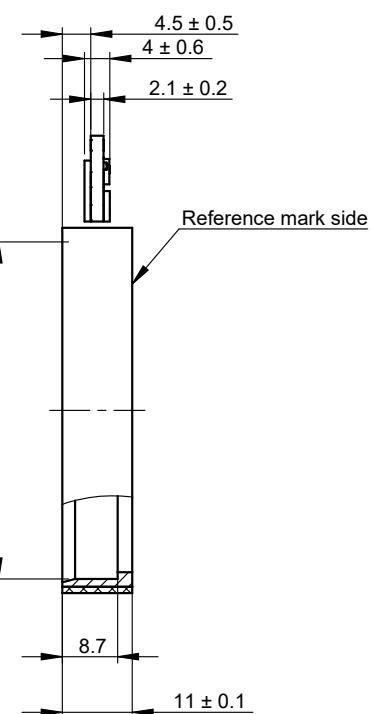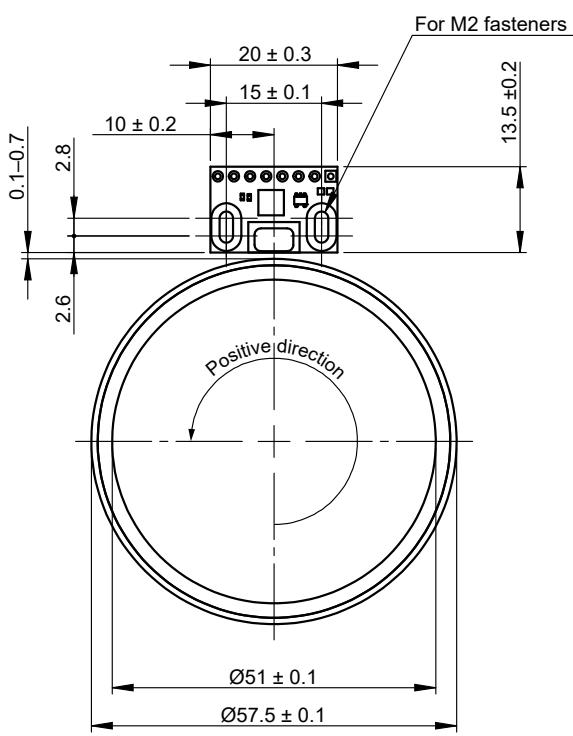



# MR057R

Outer diameter:  $57.5 \pm 0.1$  mm  
 Inner diameter:  $51 \pm 0.1$  mm  
 Number of poles: 90

**RLM**

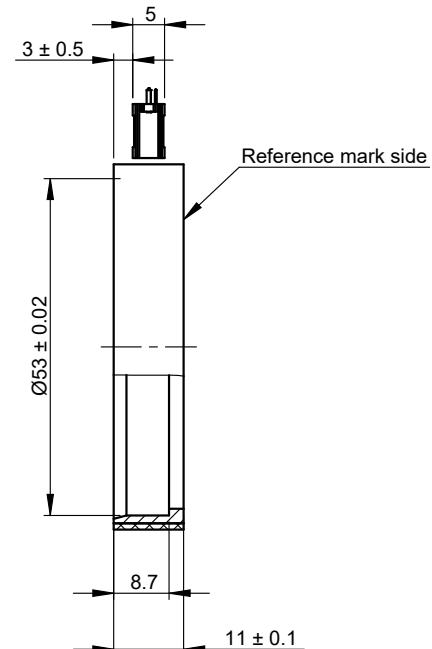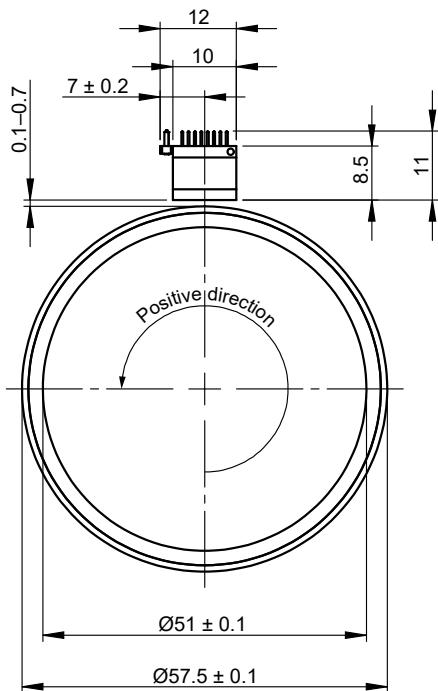



**RLB**

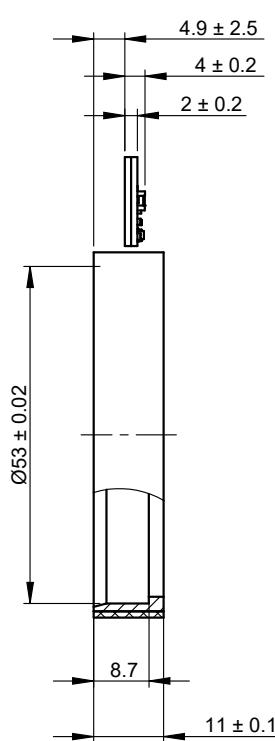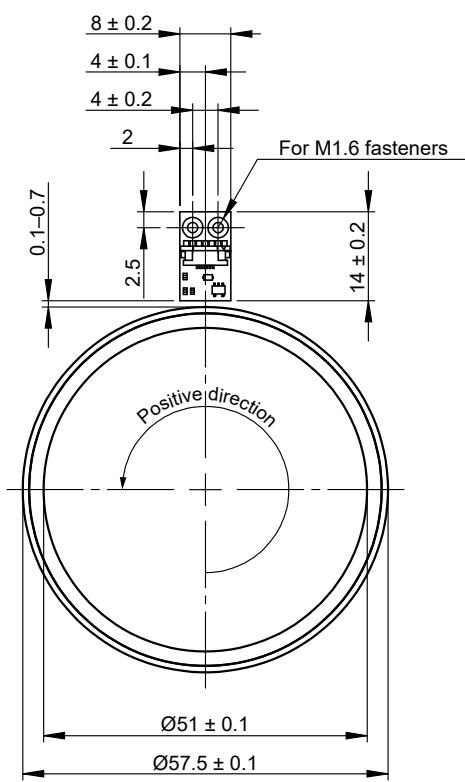



# MR057R

Outer diameter:  $57.5 \pm 0.1$  mm  
Inner diameter:  $51 \pm 0.1$  mm  
Number of poles: 90

RLC2HD

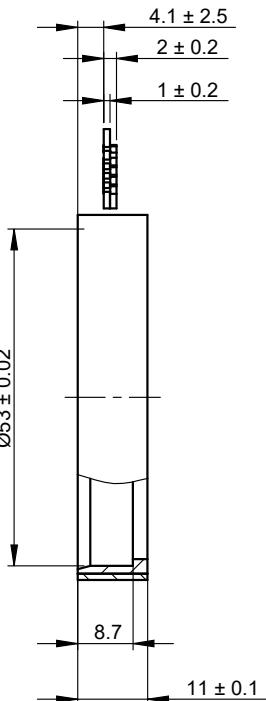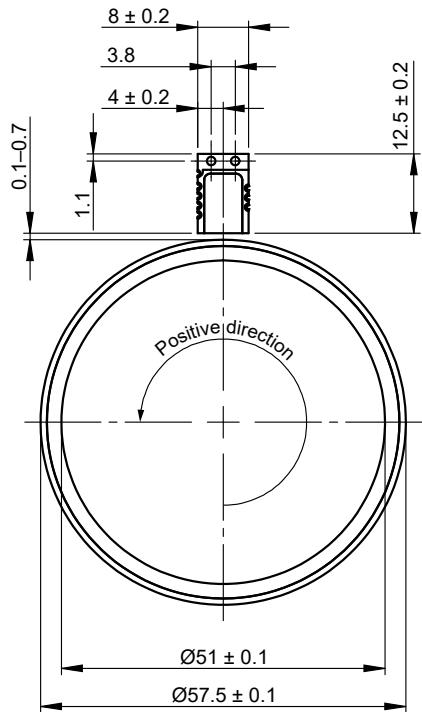



LM10

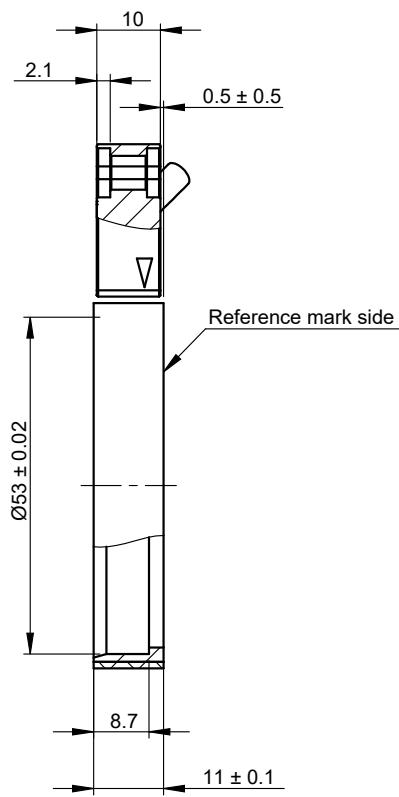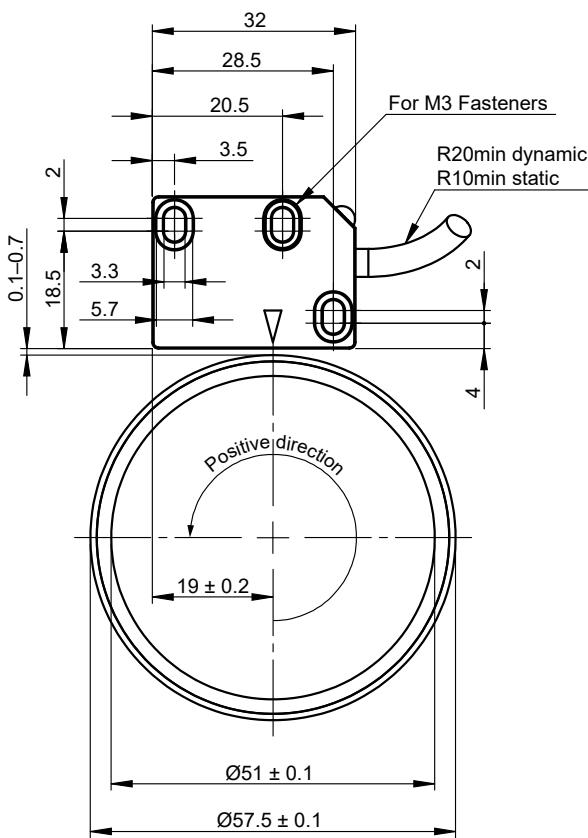

# MR057R

Outer diameter:  $57.5 \pm 0.1$  mm  
 Inner diameter:  $51 \pm 0.1$  mm  
 Number of poles: 90

**LM13**

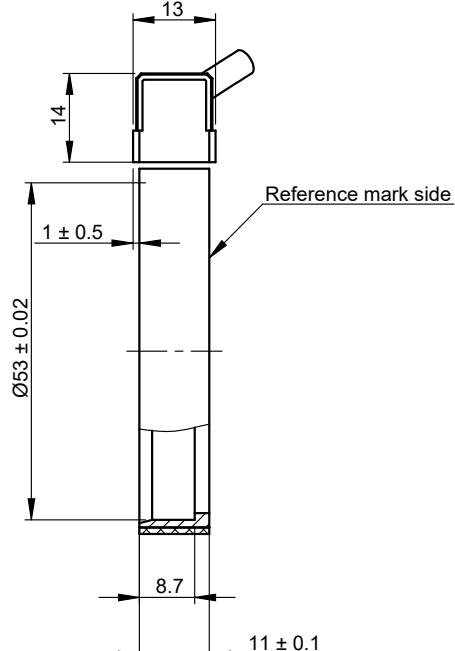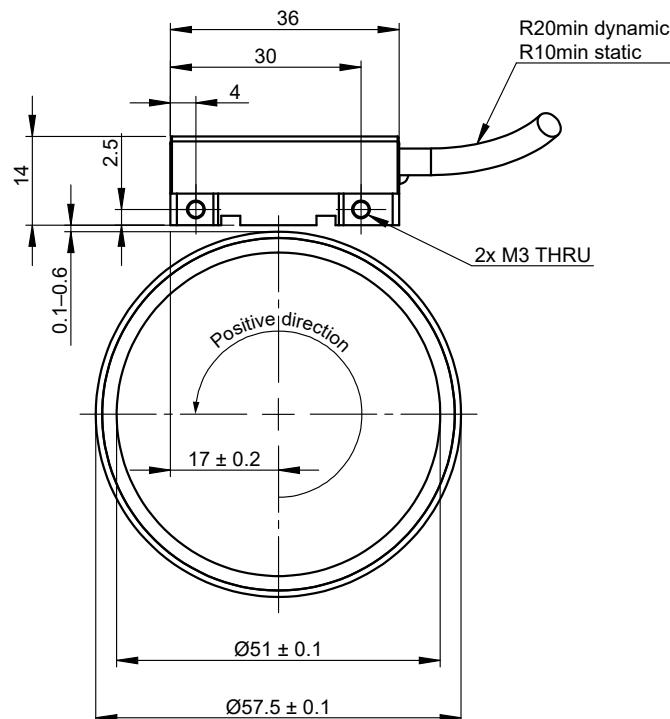



## SDE and crosstalk error

(typical measured value)

### Legend

- LM
- RoLin

90 poles, 2 mm width

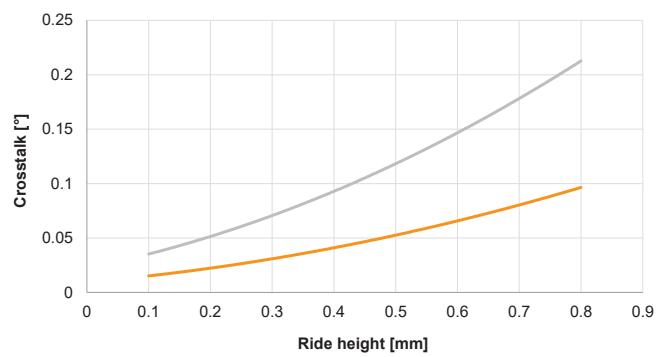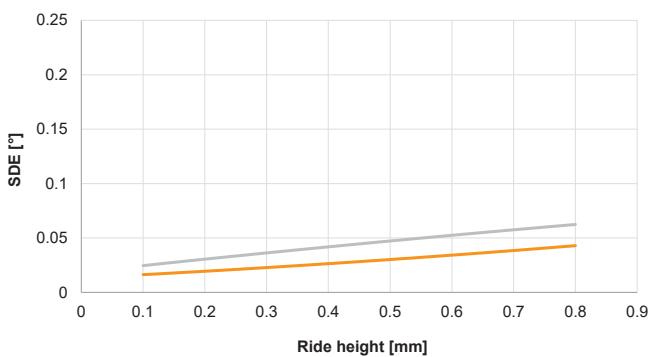

# MR075E

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
120 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM
48 poles, 5 mm pole length	-	-	Ri+DCRM	-	-	-	-

No Ri - No reference mark option, only incremental track available  
Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Outer diameter	$75.4 \pm 0.1 \text{ mm}^{\text{c}}$ $75.6 \pm 0.1 \text{ mm}^{\text{d}}$
Inner diameter	60 H7 mm
Height	$10 \pm 0.1 \text{ mm}$
Mass	114 g
Moment of inertia	$1.33 \times 10^{-4} \text{ kgm}^2$
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4021 / AISI 420
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6} \text{ K}^{-1}$
Protective foil option	Yes


Pole length	2 mm	5 mm
Number of poles	120	48
Basic increment of distance coded reference mark	92 mm / 140°	60 mm / 90°
System error	$\pm 0.07^\circ$	$\pm 0.20^\circ{}^{\text{a}}$ $\pm 0.40^\circ{}^{\text{b}}$

<sup>a</sup> 1 mm ride height  
<sup>b</sup> 2.5 mm ride height  
<sup>c</sup> without protective foil  
<sup>d</sup> with protective foil

**NOTE:** For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances



Dimensions and tolerances in mm.

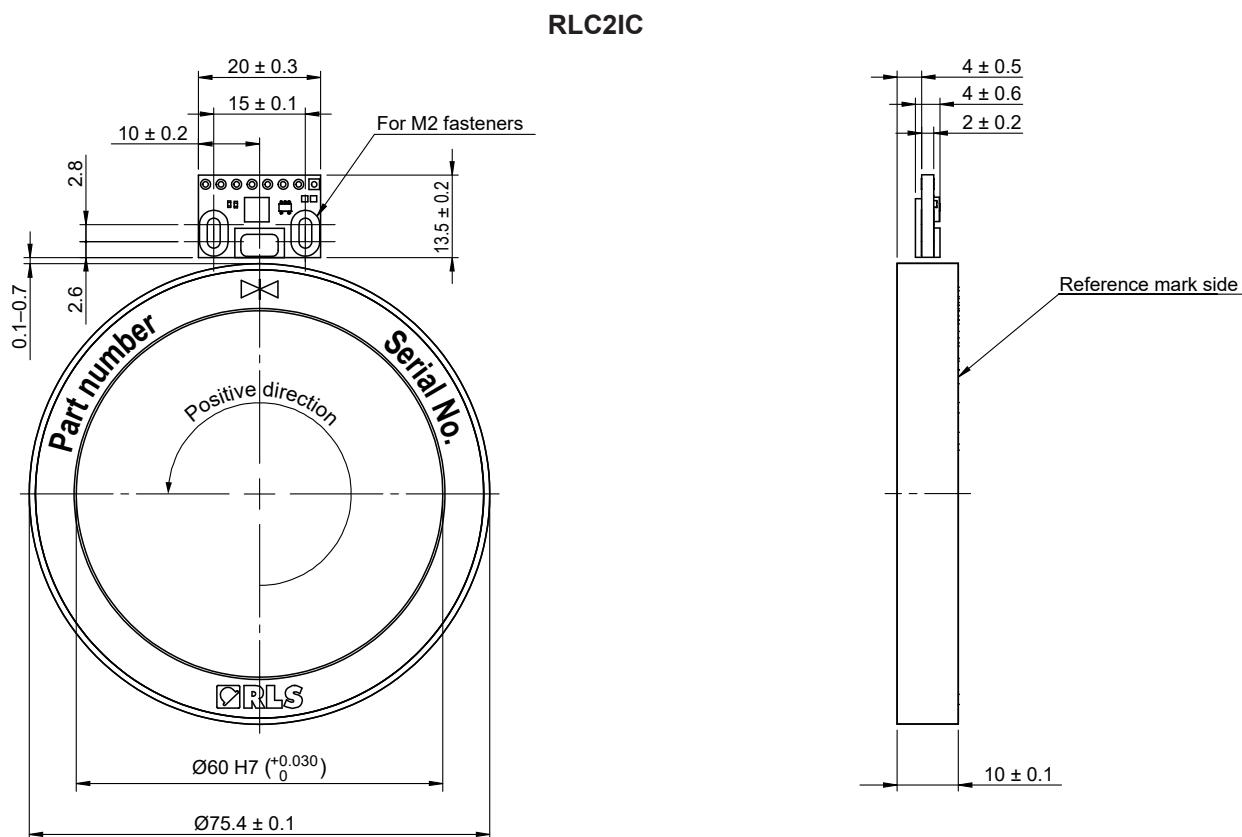



# MR075E

**Outer diameter:**  $75.4 \pm 0.1$  mm  
**Inner diameter:** 60 H7 mm  
**Number of poles:** 120 / 48

**RLM**

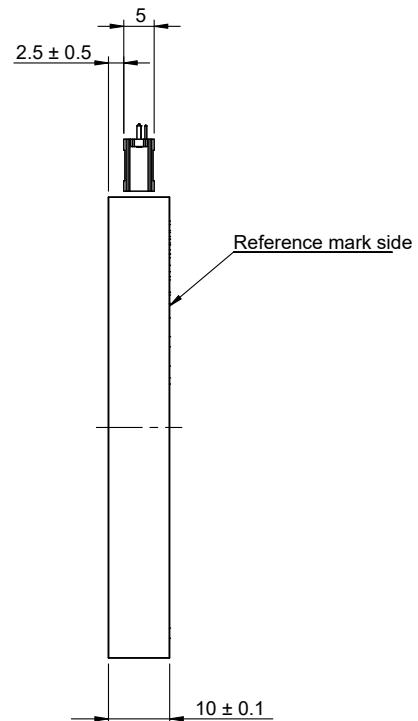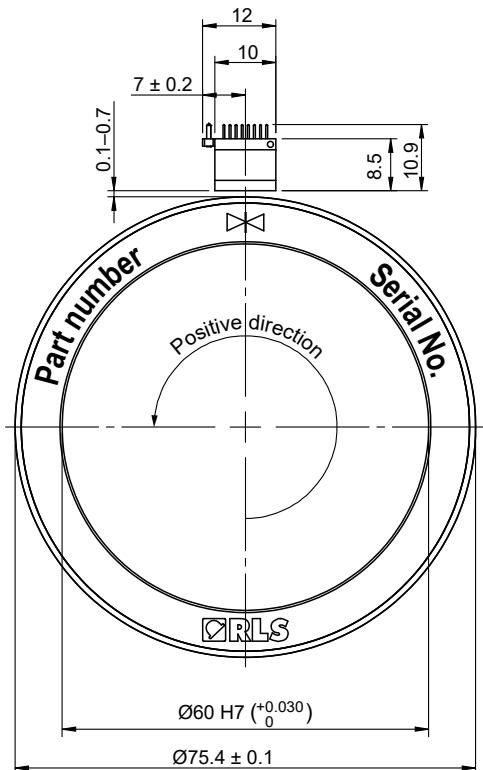


**RLB**

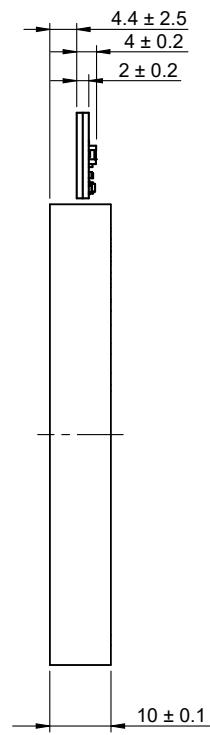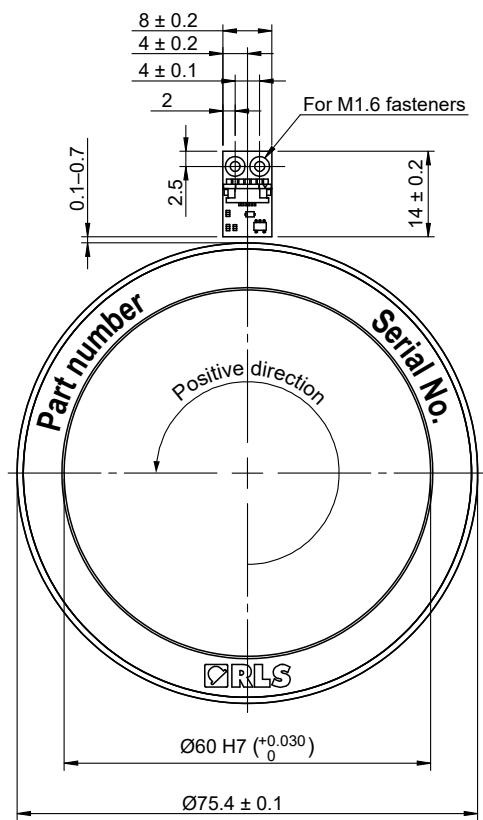


# MR075E

Outer diameter:  $75.4 \pm 0.1$  mm  
Inner diameter: 60 H7 mm  
Number of poles: 120 / 48

RLC2HD

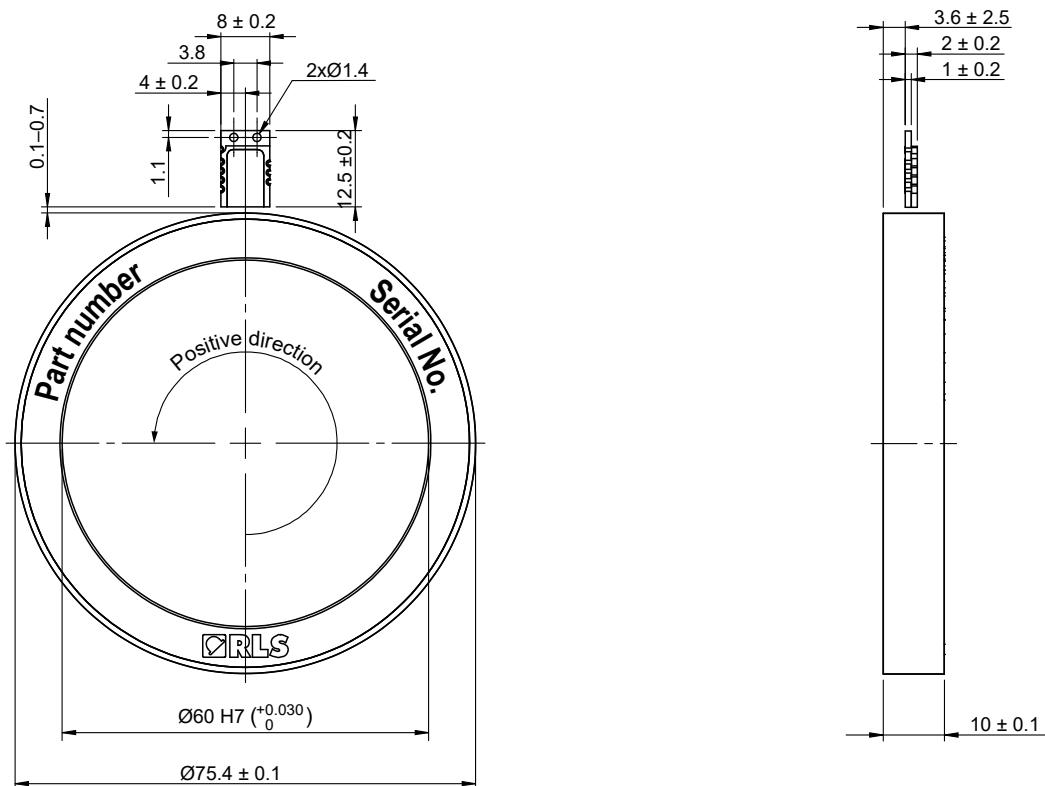


LM10/15

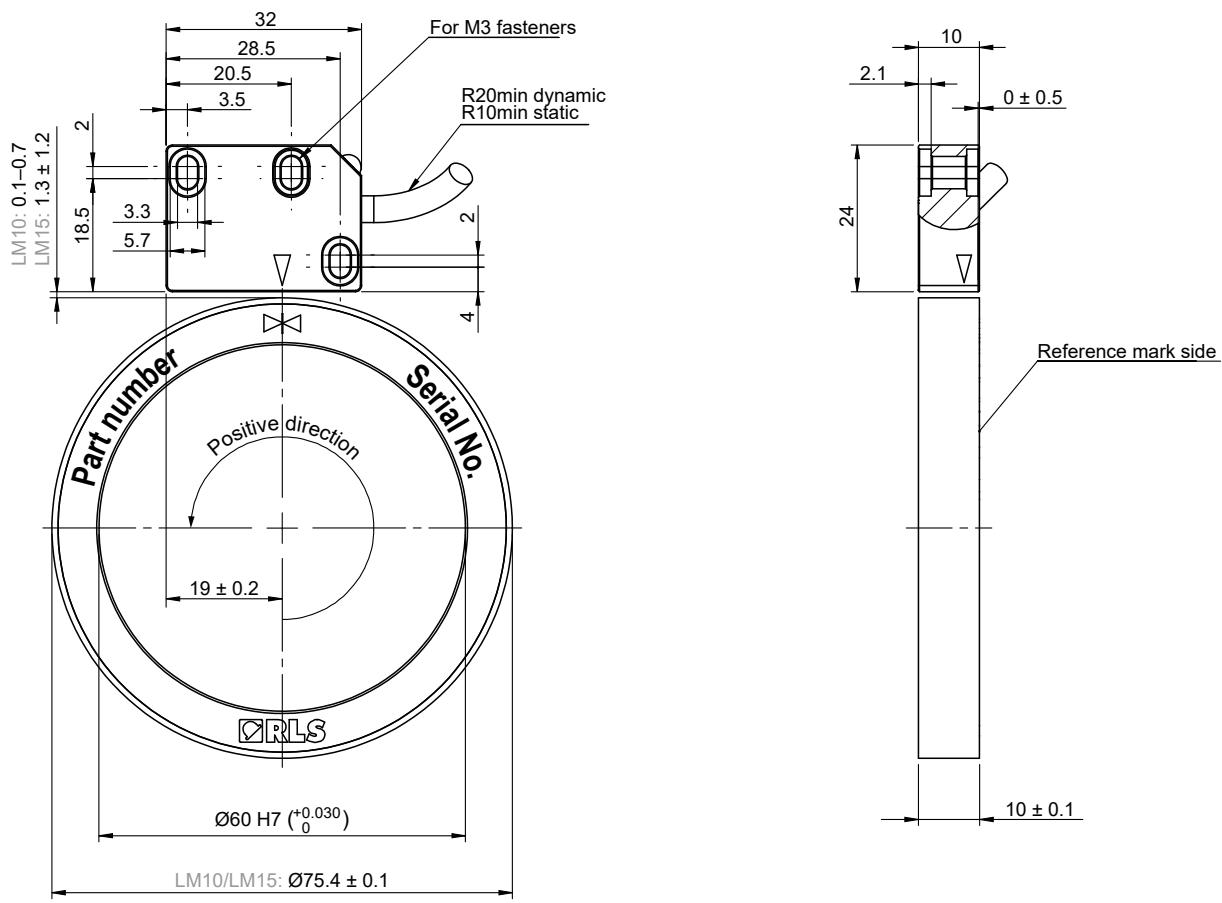

# MR075E

Outer diameter:  $75.4 \pm 0.1$  mm  
 Inner diameter: 60 H7 mm  
 Number of poles: 120 / 48

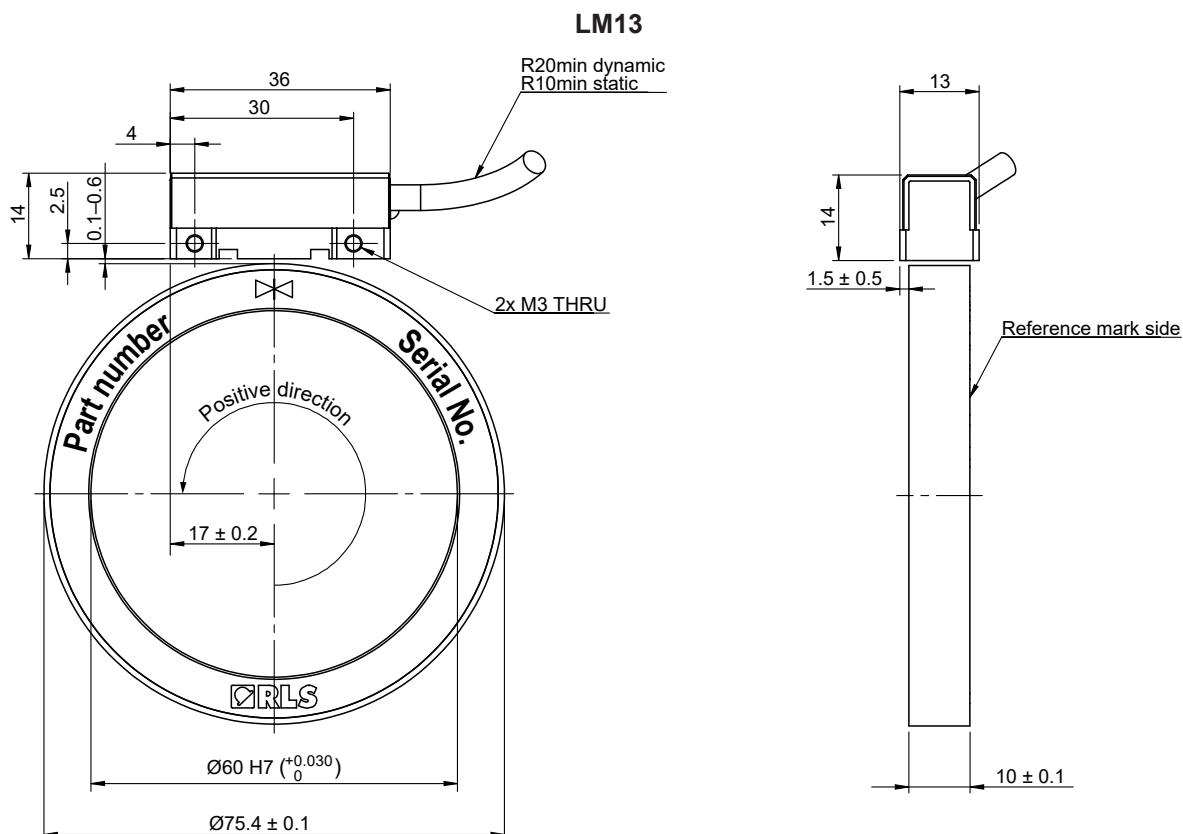



## SDE and crosstalk error

(typical measured value)



### Legend

- LM
- RoLin

120 poles, 2 mm width

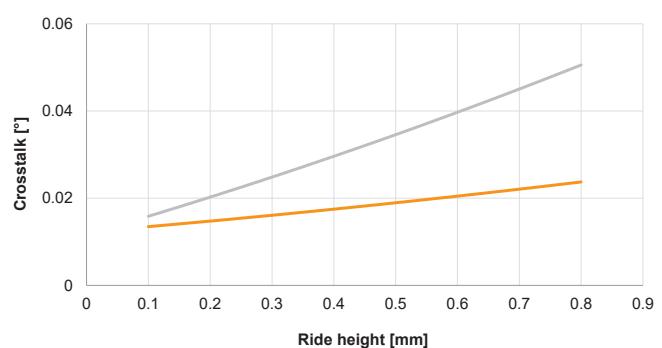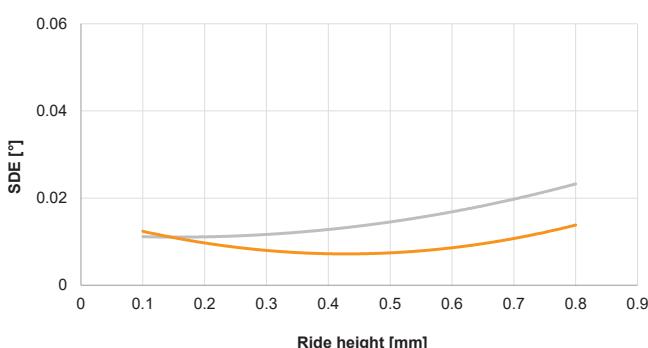

48 poles, 5 mm width

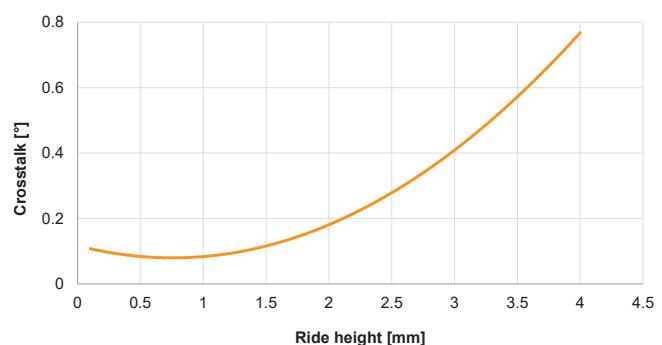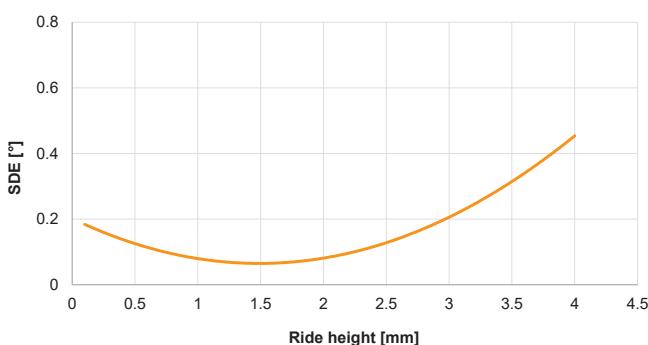

# MR080R

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
128 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Outer diameter	$80.3 \pm 0.1 \text{ mm}^{\text{c}}$ $80.5 \pm 0.1 \text{ mm}^{\text{d}}$
Inner diameter	74 mm
Installation diameter	$76.1 \pm 0.02$
Height	$11 \pm 0.1 \text{ mm}$
Mass	34 g
Moment of inertia	$5.34 \times 10^{-5} \text{ kgm}^2$
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4021 / AISI 420
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6} \text{ K}^{-1}$
Protective foil option	Yes

Pole length	2 mm
Number of poles	128
Basic increment of distance coded reference mark	64 mm / 90°
System error	$\pm 0.09^\circ$

<sup>c</sup> without protective foil



<sup>d</sup> with protective foil

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances

Dimensions and tolerances in mm.



RLC2IC

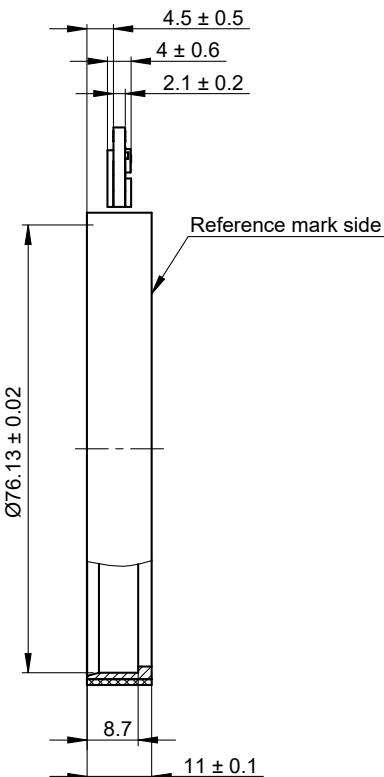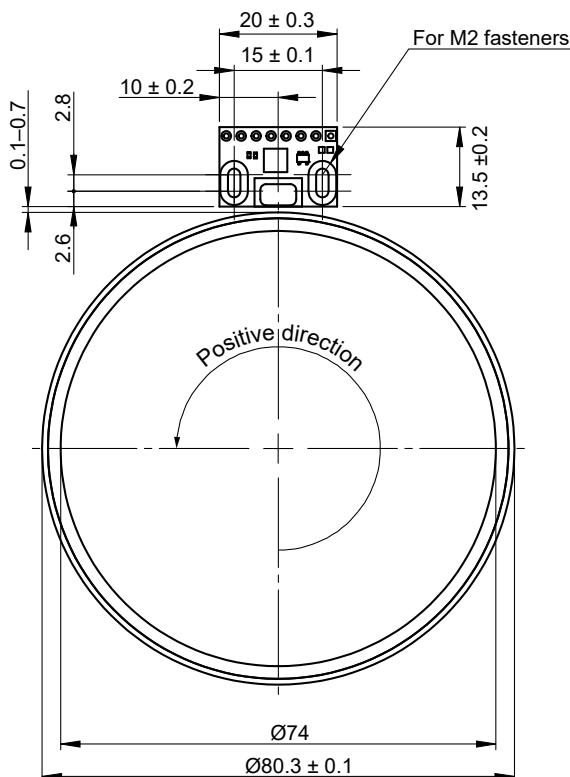



# MR080R

Outer diameter:  $80.3 \pm 0.1$  mm  
 Inner diameter: 74 mm  
 Number of poles: 128

RLM

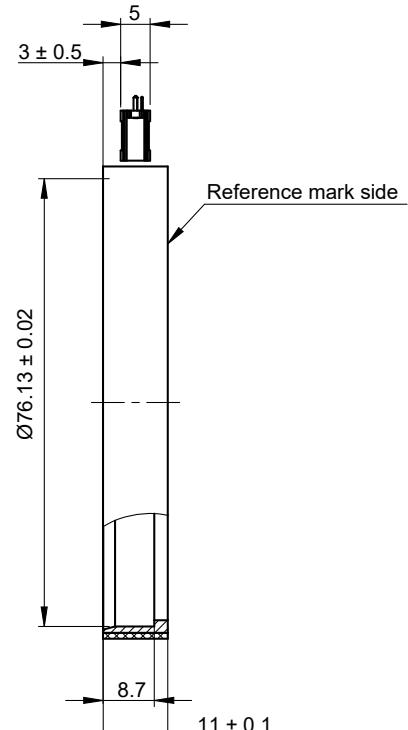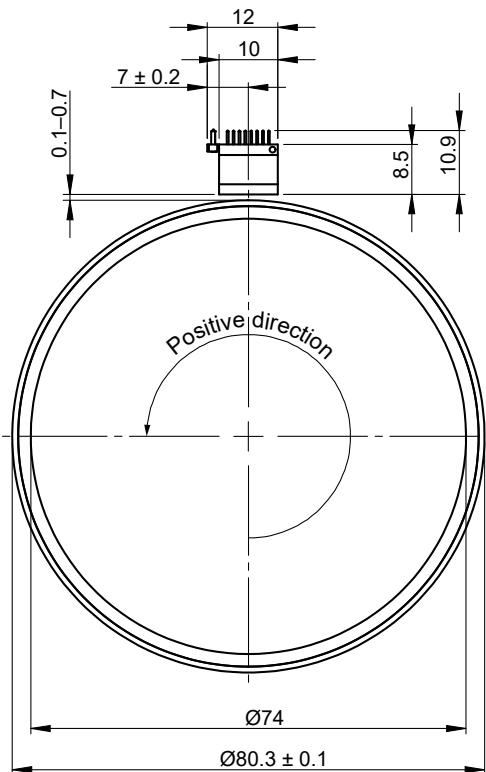


RLB

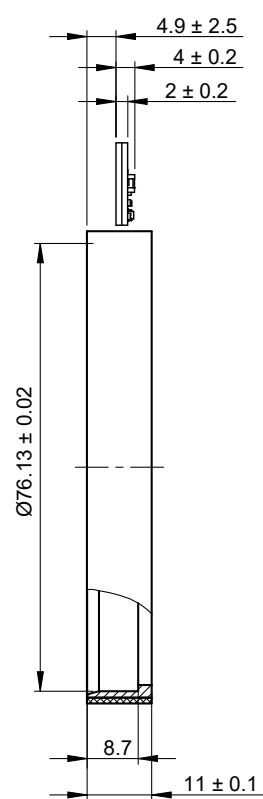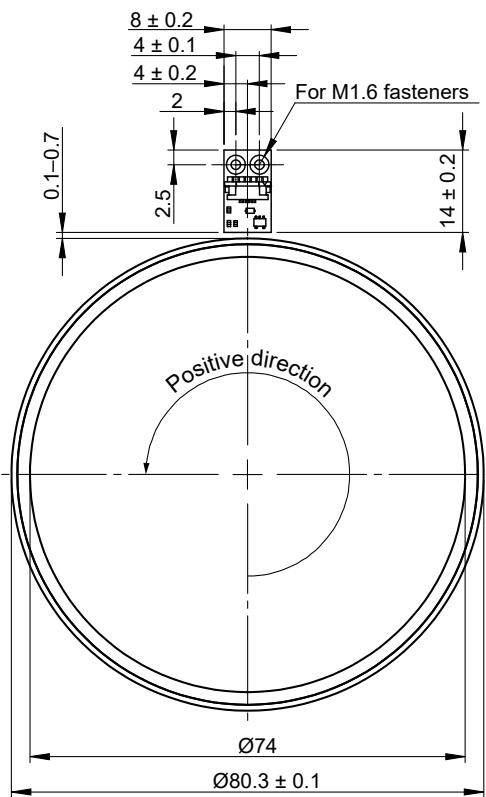


# MR080R

Outer diameter:  $80.3 \pm 0.1$  mm  
Inner diameter: 74 mm  
Number of poles: 128

RLC2HD

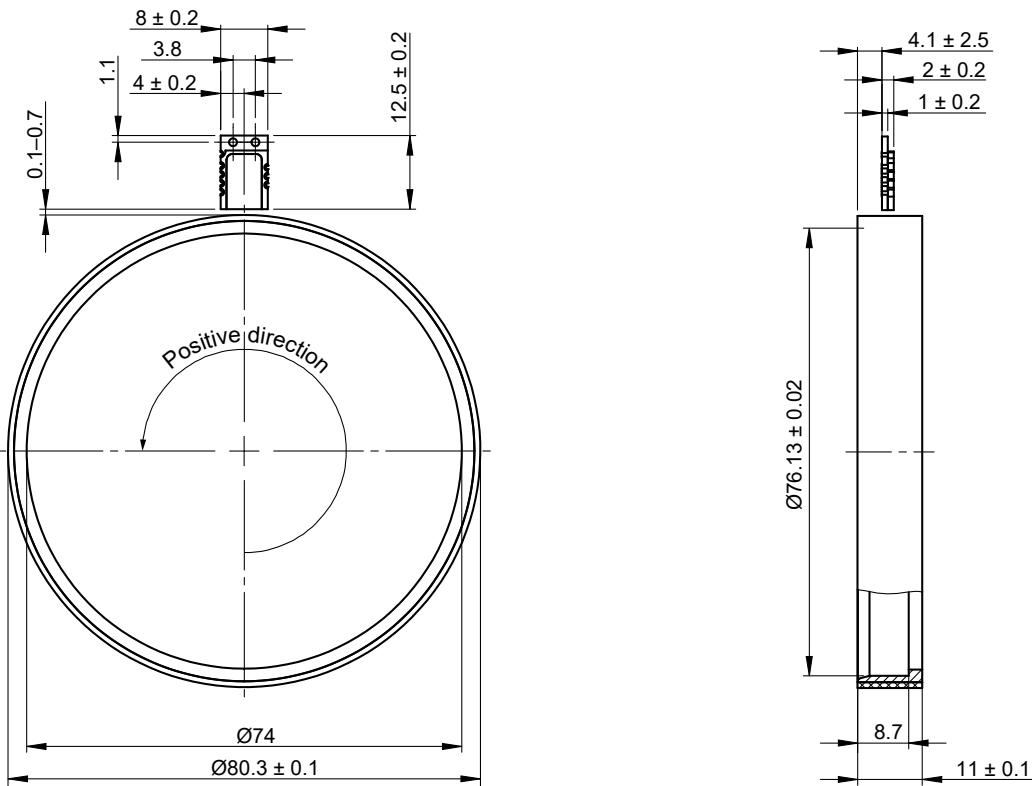



LM10

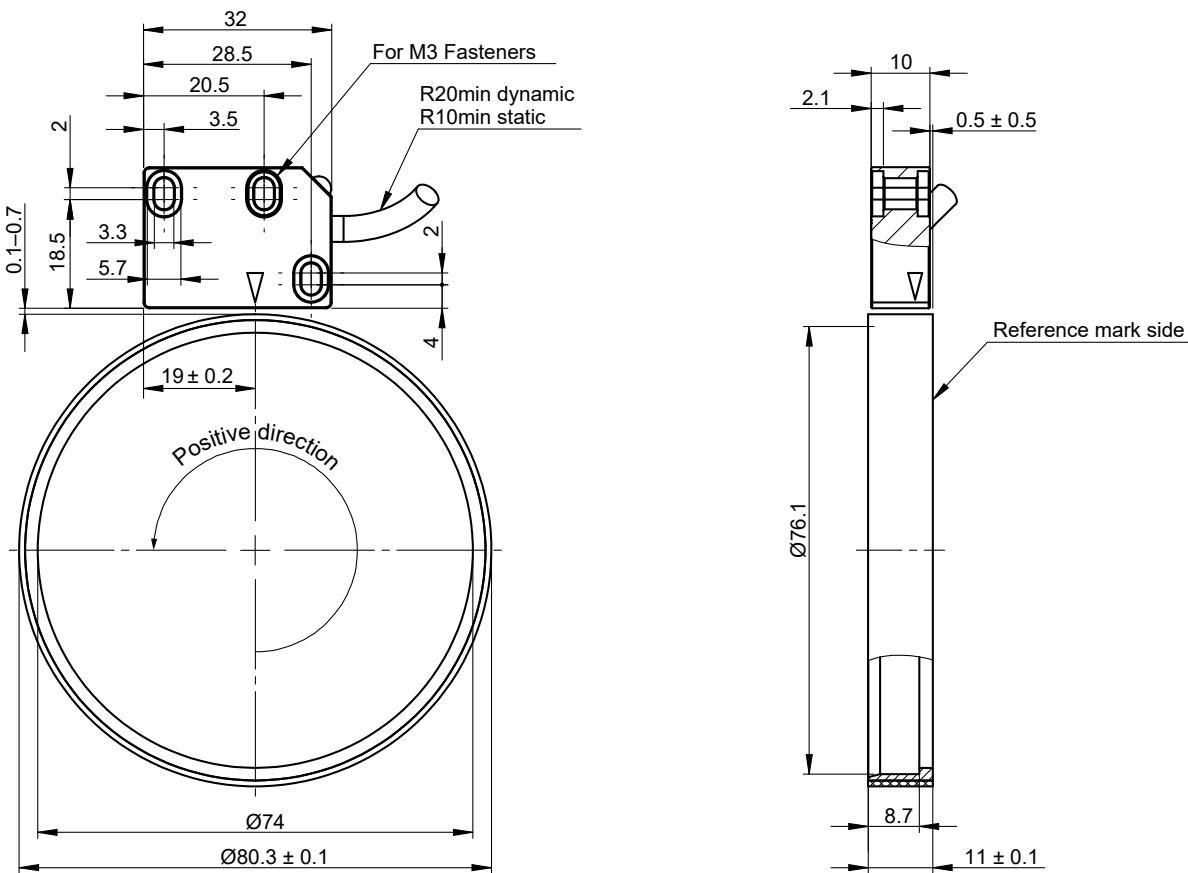

# MR080R

Outer diameter:  $80.3 \pm 0.1$  mm  
 Inner diameter: 74 mm  
 Number of poles: 128

**LM13**

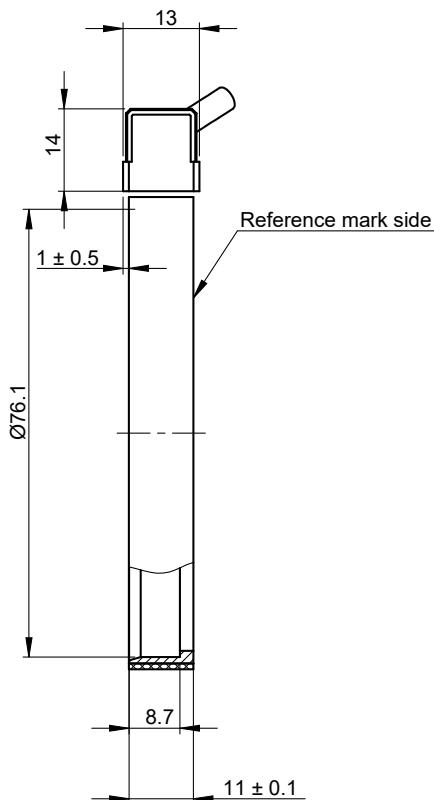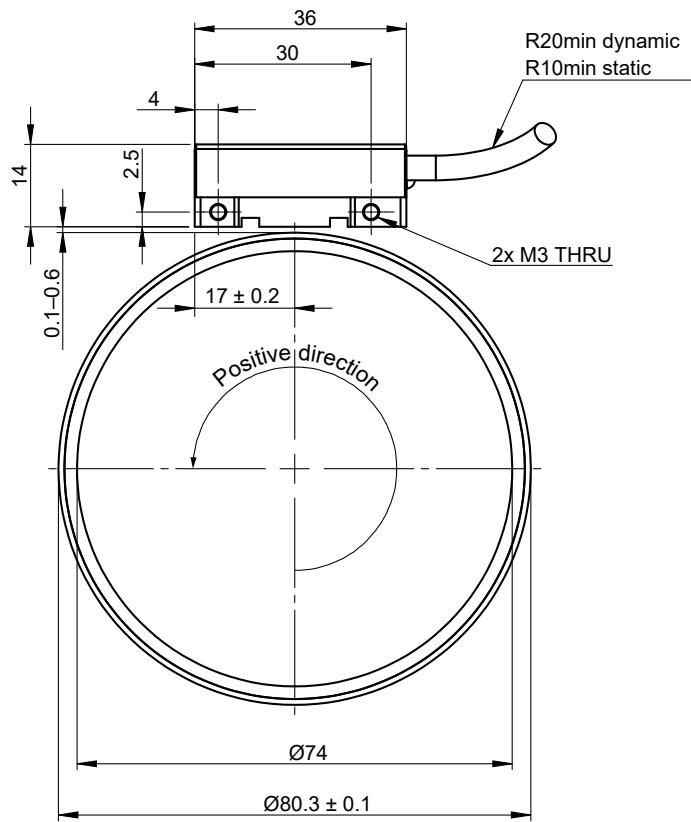

## SDE and crosstalk error



(typical measured value)

### Legend

■ LM

■ RoLin

128 poles, 2 mm width

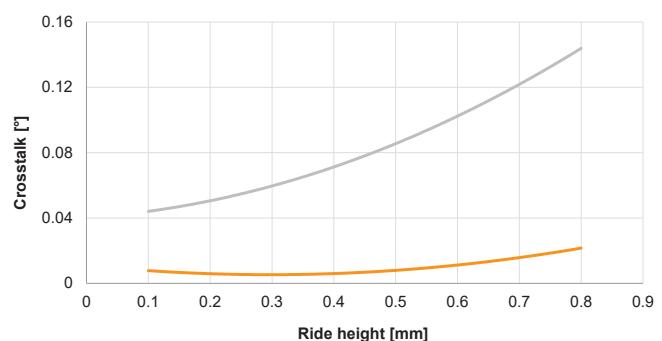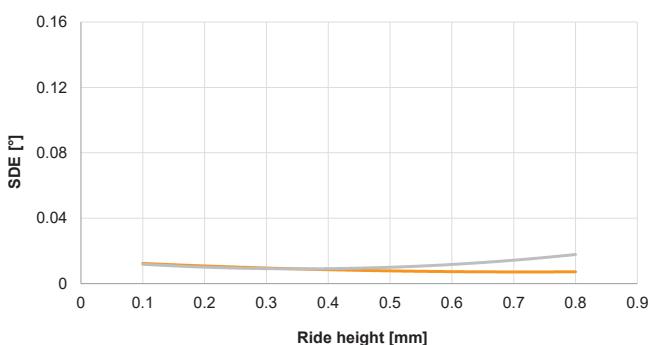

# MR100F

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
<b>160 poles, 2 mm pole length</b>	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features


Outer diameter	$100.5 \pm 0.1$ mm
Inner diameter	$84.77 \pm 0.05$ mm
Height	$8.6 \pm 0.1$ mm
Mass	38 g
Moment of inertia	$9.11 \times 10^{-5}$ kgm <sup>2</sup>
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.0312 + Zn 4 µm
Hub thermal expansion coefficient (CTE)	$11 \times 10^{-6}$ K <sup>-1</sup>
Protective foil option	No

Pole length	2 mm
Number of poles	160
Basic increment of distance coded reference mark	40 mm / 45°
System error	$\pm 0.10^\circ$

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances



Dimensions and tolerances in mm.

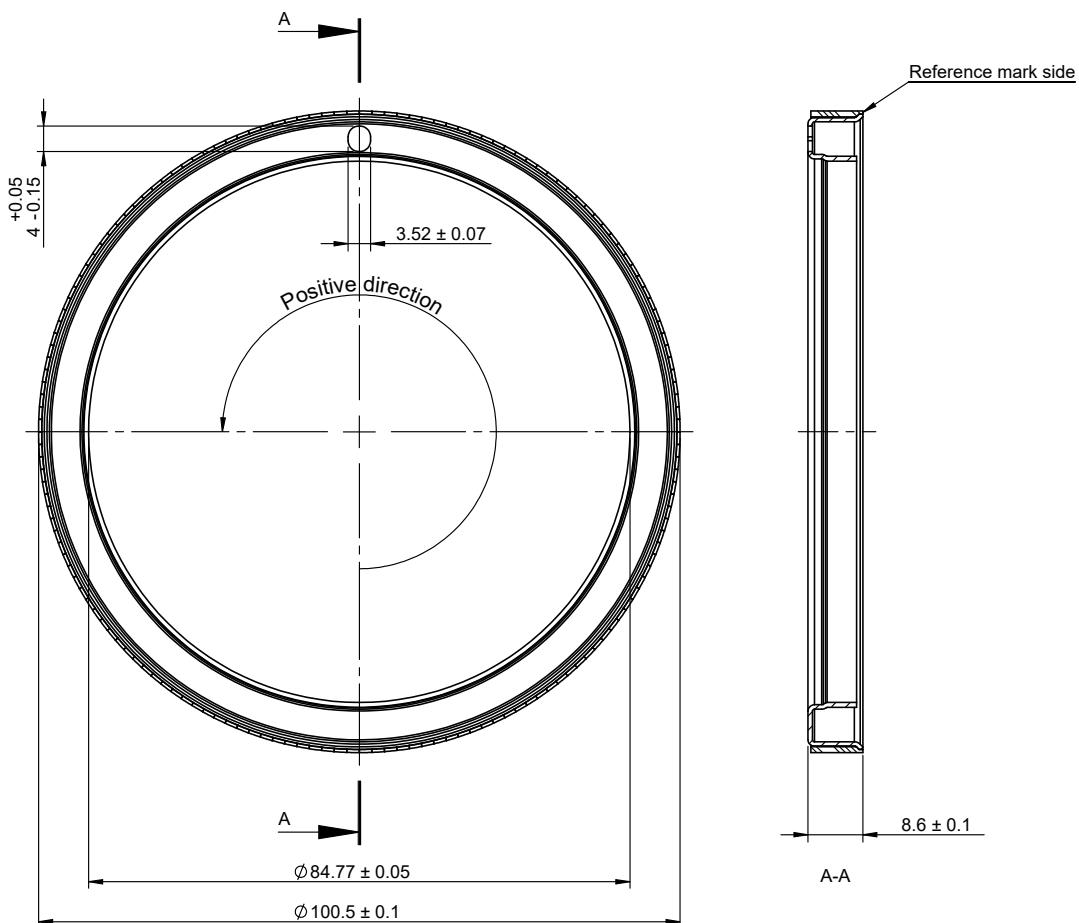



# MR100F

Outer diameter:  $100.5 \pm 0.1$  mm  
 Inner diameter:  $84.77 \pm 0.05$  mm  
 Number of poles: 160



**RLC2IC**

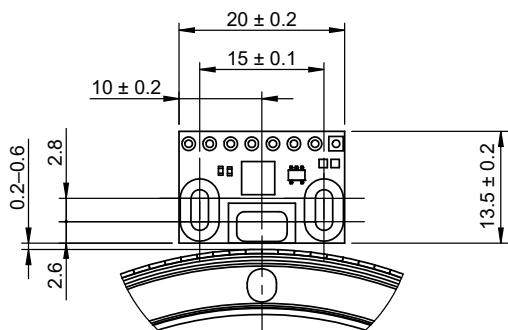



**RLM**

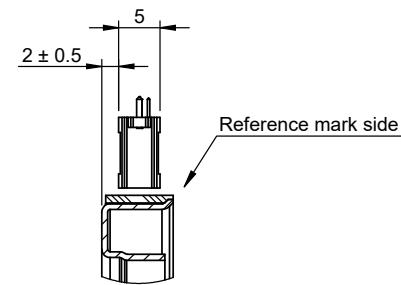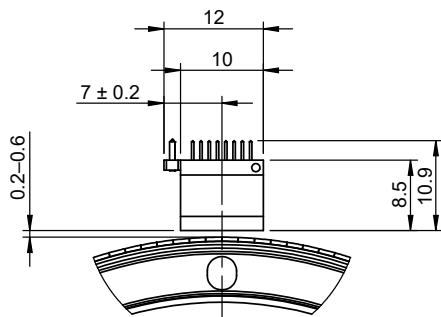

**RLB**

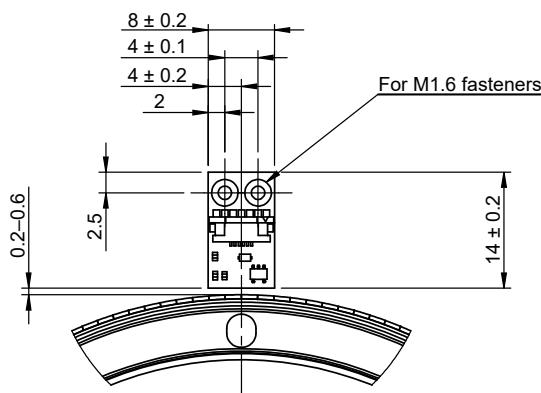



**RLC2HD**

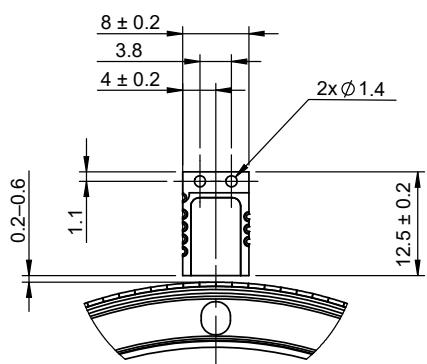



# MR100F

Outer diameter:  $100.5 \pm 0.1$  mm  
Inner diameter:  $84.77 \pm 0.05$  mm  
Number of poles: 160

LM10

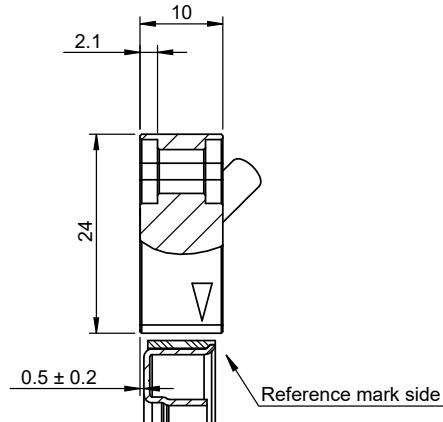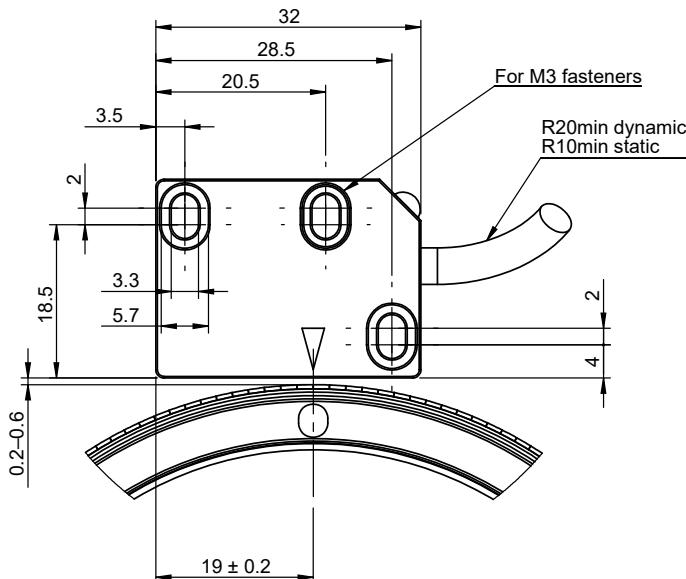

LM13

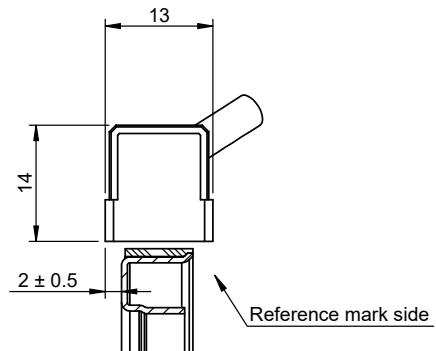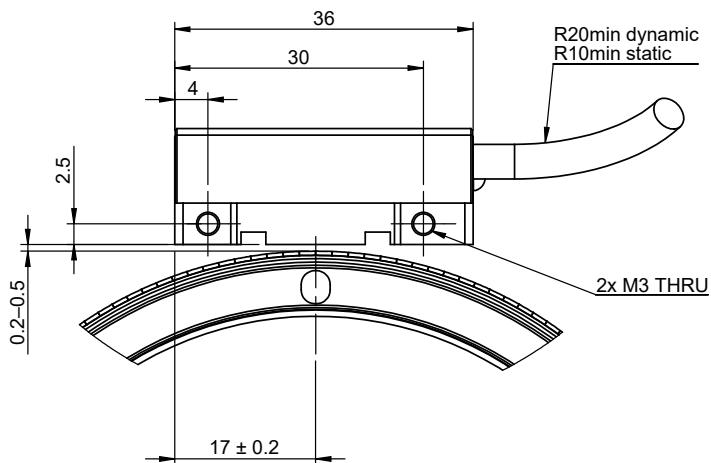

## SDE and crosstalk error



(typical measured value)

### Legend

■ LM

■ RoLin

160 poles, 2 mm width

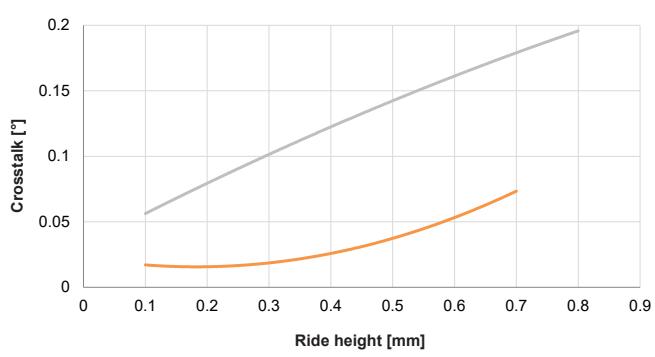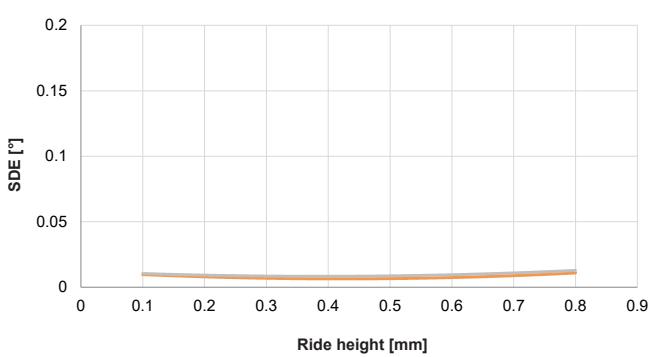

# MR122E

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
194 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Outer diameter	$122 \pm 0.1 \text{ mm}^{\text{c}}$ $122.2 \pm 0.1 \text{ mm}^{\text{d}}$
Inner diameter	90 H7 mm
Height	$10 \pm 0.1 \text{ mm}$
Mass	380 g
Moment of inertia	$1.10 \times 10^{-3} \text{ kgm}^2$
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4104 / AISI 430
Hub thermal expansion coefficient (CTE)	$10 \times 10^{-6} \text{ K}^{-1}$
Protective foil option	Yes

Pole length	2 mm
Number of poles	194
Basic increment of distance coded reference mark	48 mm / 45°
System error	$\pm 0.04^\circ$


<sup>c</sup> without protective foil

<sup>d</sup> with protective foil

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances



Dimensions and tolerances in mm.

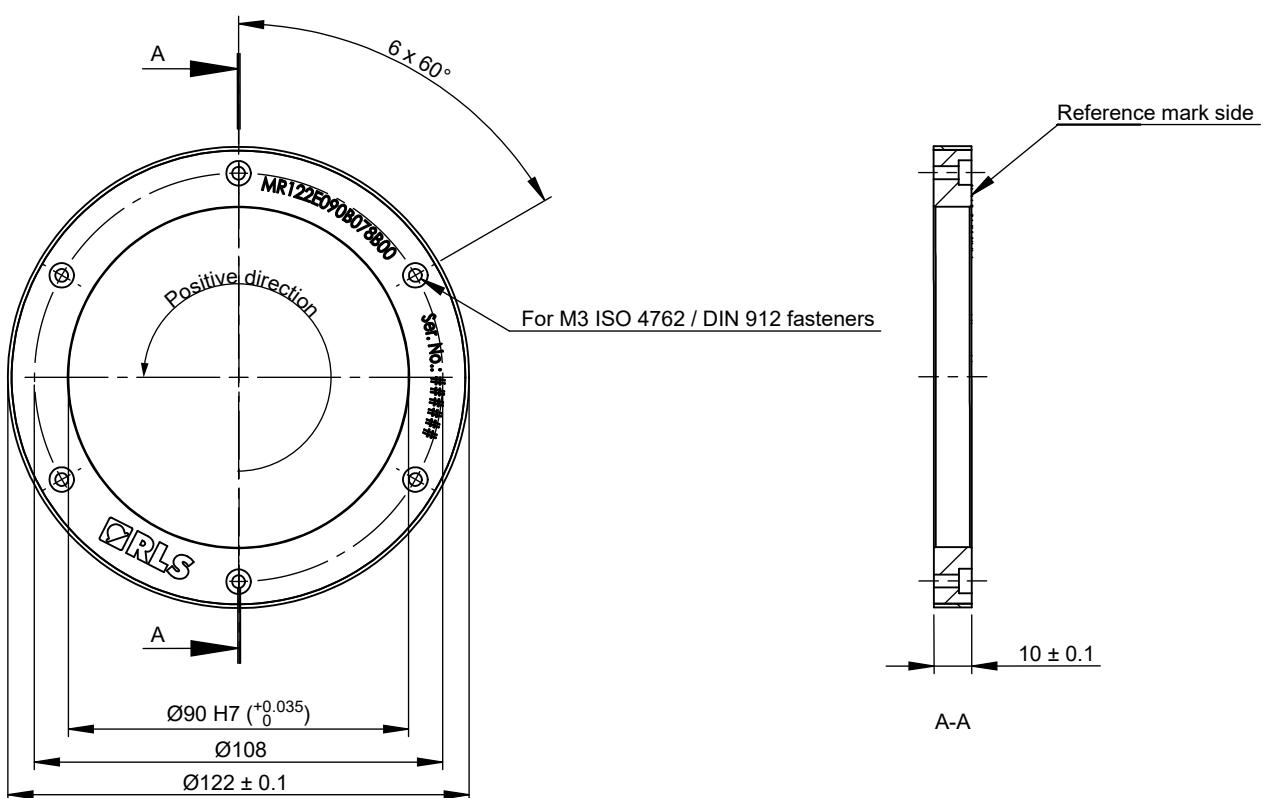



# MR122E

Outer diameter:  $122 \pm 0.1$  mm  
Inner diameter: 90 H7 mm  
Number of poles: 194



RLC2IC

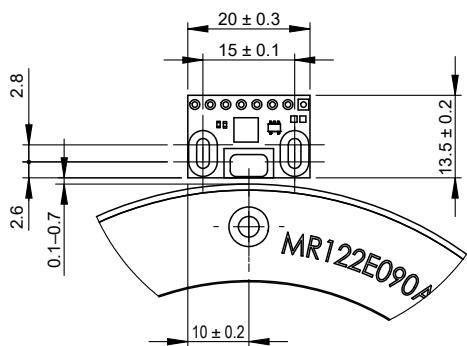



RLM

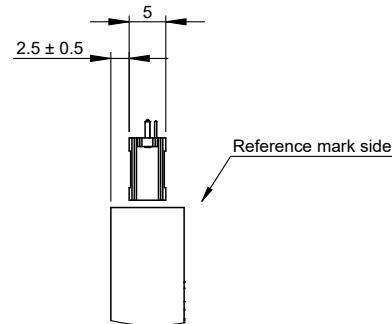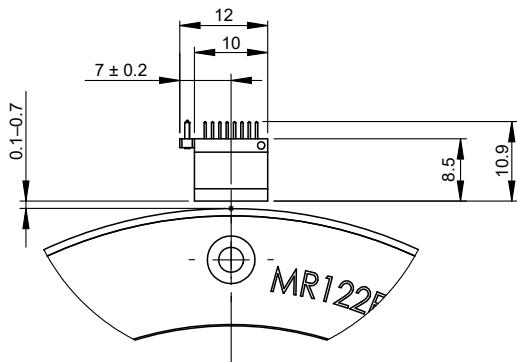

RLB

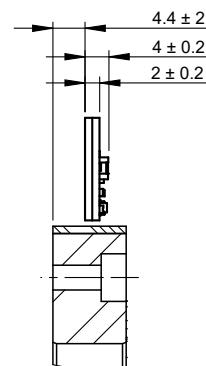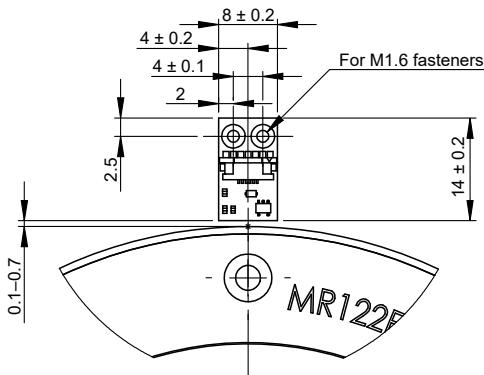



RLC2HD

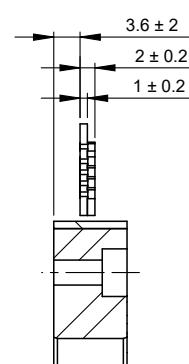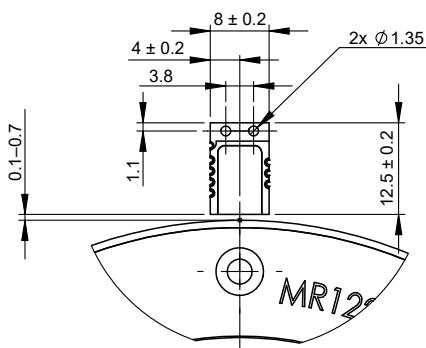



# MR122E

Outer diameter:  $122 \pm 0.1$  mm  
 Inner diameter: 90 H7 mm  
 Number of poles: 194

**LM10**

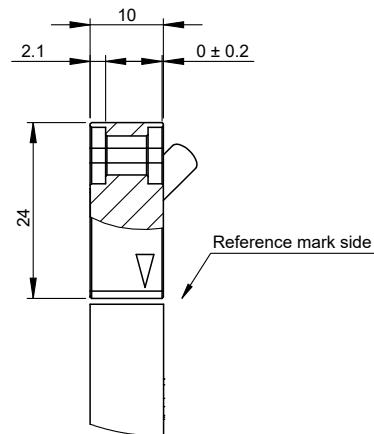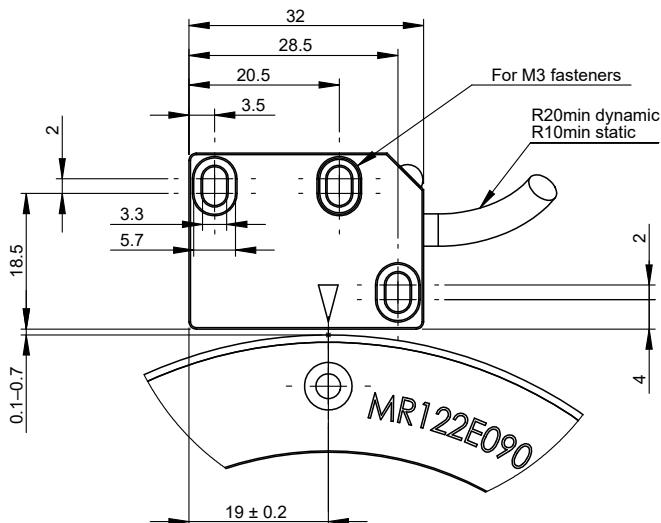

**LM13**

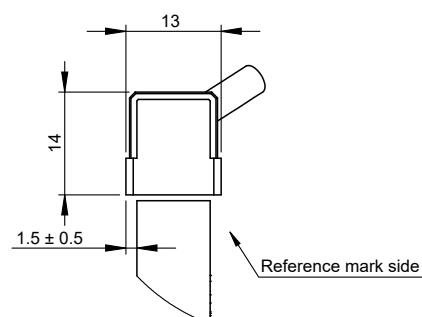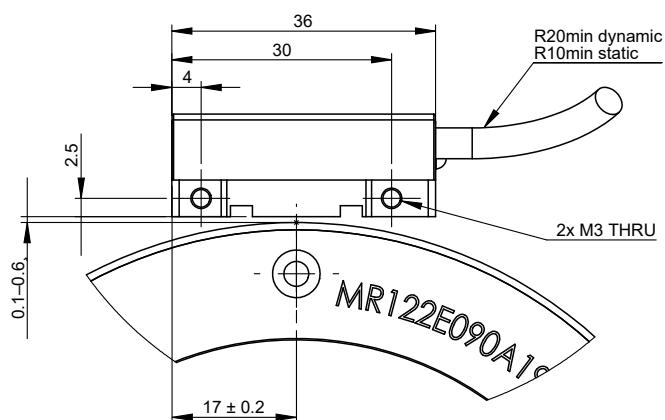



## SDE and crosstalk error

(typical measured value)

### Legend

- LM
- RoLin

194 poles, 2 mm width

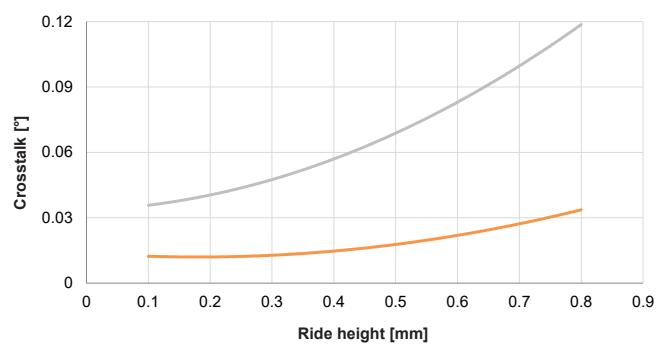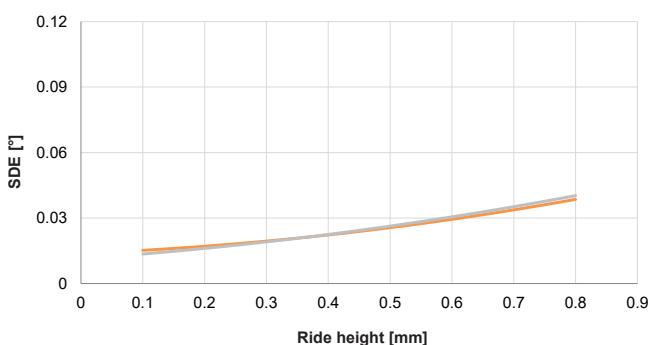

# MR162Q

## Compatibility table

	LM10	LM13	LM15	RLB	RLC2HD	RLC2IC	RLM
256 poles, 2 mm pole length	Ri+DCRM	Ri+DCRM	-	No Ri	No Ri	Ri+DCRM	Ri+DCRM

No Ri - No reference mark option, only incremental track available

Ri+DCRM - Unique, distance coded reference mark or only incremental track available

## Technical features

Outer diameter	$161.7 \pm 0.1$ mm <sup>c</sup> $161.9 \pm 0.1$ mm <sup>d</sup>
Inner diameter	$143^0_{-0.03}$ mm
Height	$12 \pm 0.1$ mm
Mass	365 g
Moment of inertia	$2.14 \times 10^{-3}$ kgm <sup>2</sup>
Material of magnetic layer	HNBR + ferrite
Hub material	EN1.4104 / AISI 430
Hub thermal expansion coefficient (CTE)	$10 \times 10^{-6}$ K <sup>-1</sup>
Protective foil option	Yes


Pole length	2 mm
Number of poles	256
Basic increment of distance coded reference mark	64 mm / 45°
System error	$\pm 0.03^\circ$

<sup>c</sup> without protective foil  
<sup>d</sup> with protective foil

NOTE: For maximum speed table refer to [MR01D03](#).

## Dimensions and installation tolerances



Dimensions and tolerances in mm.

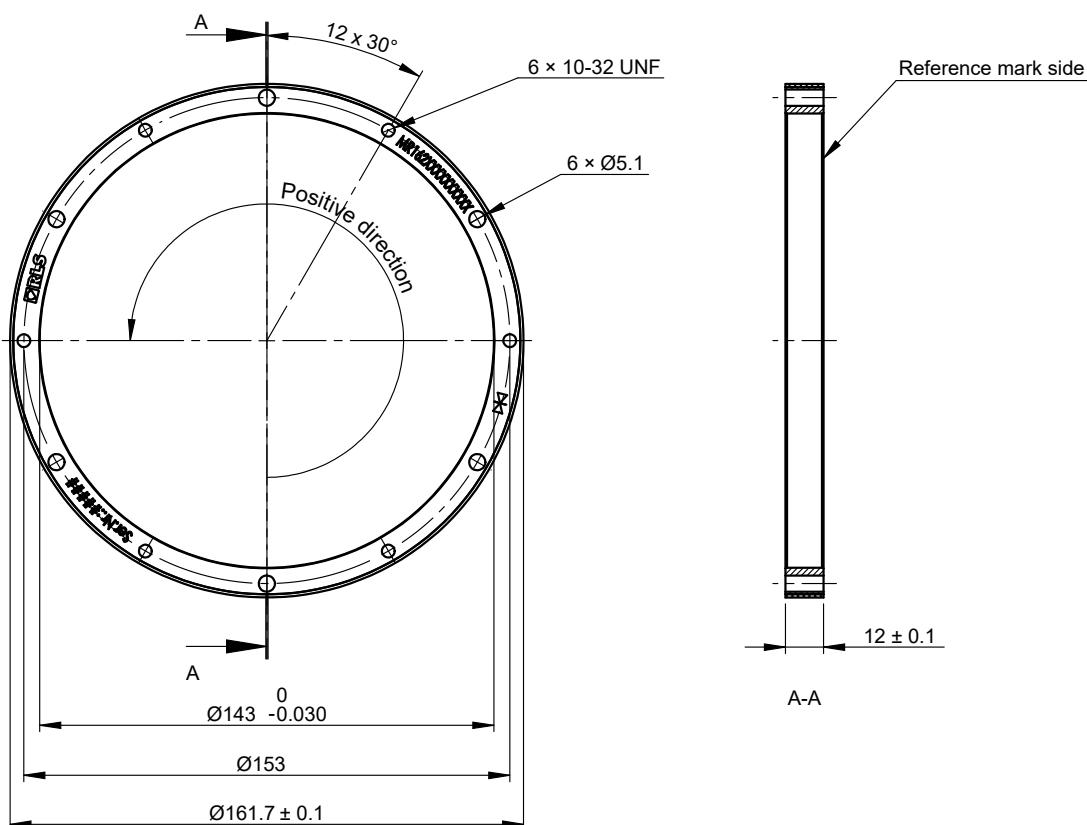



# MR162Q

Outer diameter:  $161.7 \pm 0.1$  mm  
 Inner diameter:  $143^0_{-0.03}$  mm  
 Number of poles: 256



**RLC2IC**

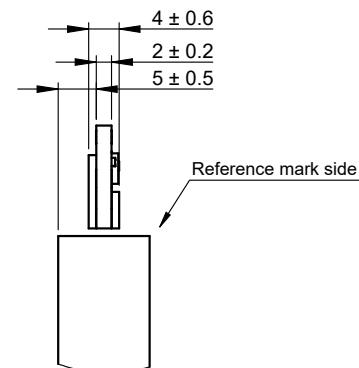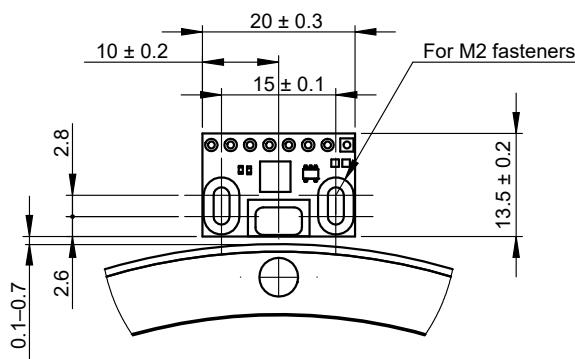



**RLM**

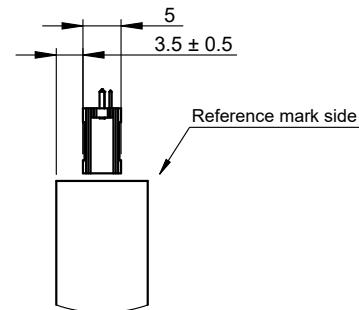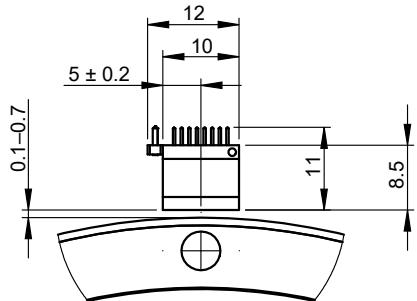

**RLB**

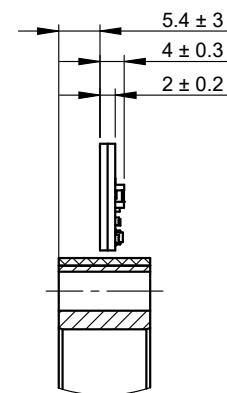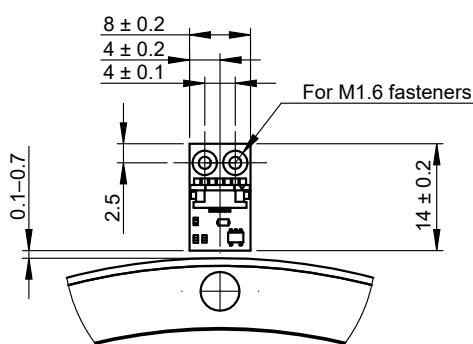



**RLC2HD**

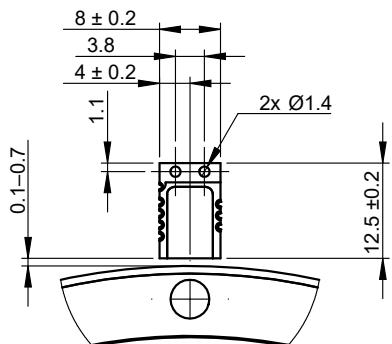



# MR162Q

Outer diameter:  $161.7 \pm 0.1$  mm  
Inner diameter:  $143^0_{-0.03}$  mm  
Number of poles: 256

LM10

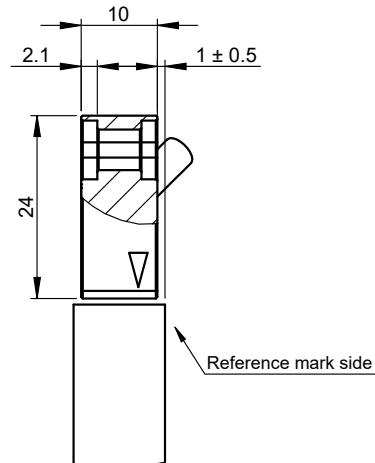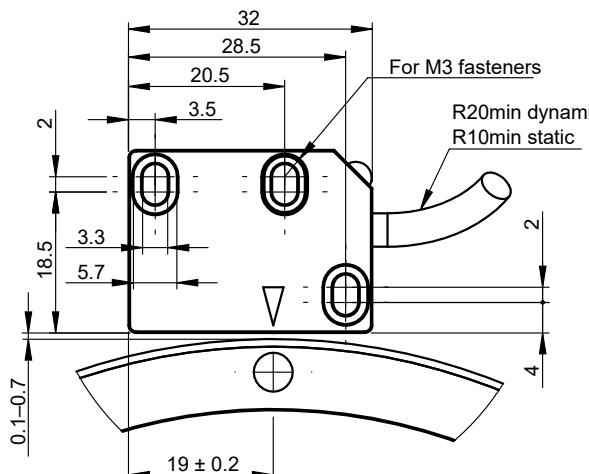

LM13

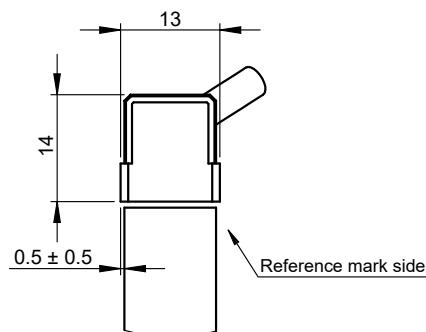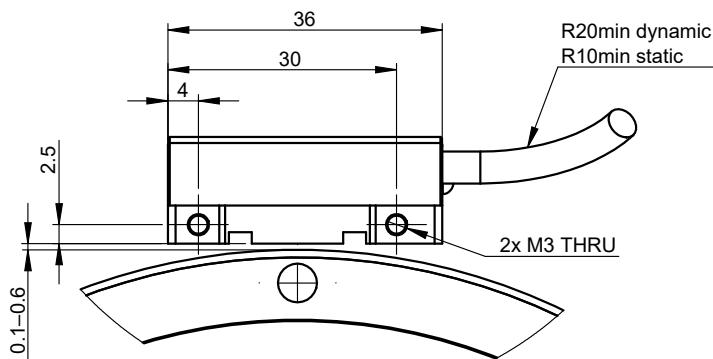

## SDE and crosstalk error



(typical measured value)

### Legend

LM

RoLin

256 poles, 2 mm width

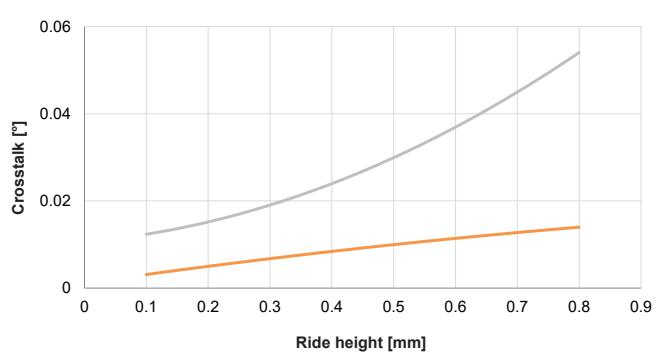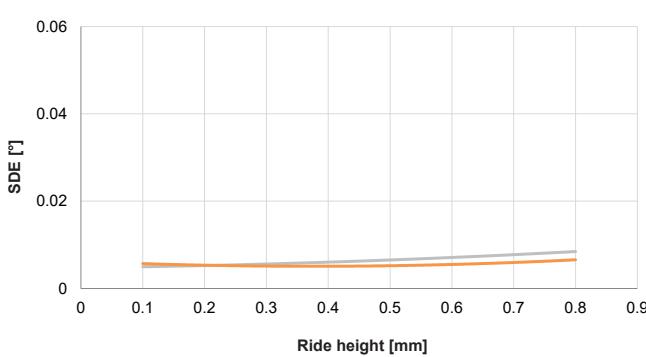

# Part numbering

<b>MR</b>	<b>040</b>	<b>G</b>	<b>030</b>	<b>A</b>	<b>064</b>	<b>M</b>	<b>00</b>	
<b>Series</b> MR - Magnetic incremental ring								<b>Special requirements</b> 00 - No special requirements
<b>Outer diameter</b>	031 - 31 mm 040 - 40 mm 047 - 47 mm 050 - 50 mm 057 - 57 mm 075 - 75 mm 080 - 80 mm	100 - 100 mm 122 - 122 mm 162 - 162 mm						<b>Material</b> M - Stainless steel hub with vulcanised elastoferrite layer P - Stainless steel hub with vulcanised elastoferrite layer and protective foil (for high speed applications) <sup>2</sup>
<b>Cross section</b>	B - Height 5.5 mm, radial magnetisation E - Height 10 mm, radial magnetisation F - Height 8.6 mm, radial magnetisation G - Height 8 mm, radial magnetisation Q - Height 12 mm, radial magnetisation R - Height 11 mm, radial magnetisation							
<b>Inner diameter</b>	020 - 20 mm 030 - 30 mm 040 - 40 mm 045 - 45 mm 051 - 51 mm 060 - 60 mm 074 - 74 mm	085 - 85 mm 090 - 90 mm 143 - 143 mm						<b>Number of poles</b> 2 mm pole length: 050 - 50 poles 064 - 64 poles 076 - 76 poles 080- 80 poles 090 - 90 poles 120 - 120 poles 128 - 128 poles 160 - 160 poles 194 - 194 poles 256 - 256 poles  5 mm pole length: 020 - 20 poles 032 - 32 poles 036 - 36 poles 048 - 48 poles
<b>Reference mark</b>	A - With reference mark B - No reference mark D - Distance coded reference mark <sup>1</sup>							


<sup>1</sup> For basic increment length refer to technical specifications of a selected ring.

<sup>2</sup> Not available for rings with Cross sections B and F. For availability refer to technical specifications of a selected ring.

**NOTE:** Not all combinations are valid. The inner diameter of rings is related to the outer diameter and cannot be randomly selected. Please check table below for available options.

Series	Outer diameter	Cross section	Inner diameter	Reference mark	Number of poles	Material	Special requirements	
MR	031	G	020	A / B	050 / 020	M / P	00	
	040	G	030	A / B / D	064			
	047	B	040		026			
	050	E	040	A / B	076	M		
	057	E	045		080 / 032	M / P		
	057	R	051		090 / 036			
	075	E	060		090			
	080	R	074		120 / 048			
	100	F	085		128			
	122	E	090		160	M		
	162	Q	143		194	M / P		
					256			

## Accessories part numbering



Installation jig for MR100F

ACC021



## Head office

### RLS merilna tehnika d.o.o.

Poslovna cona Žeje pri Komendi  
Pod vrbami 2  
SI-1218 Komenda  
Slovenia

T +386 1 5272100

F +386 1 5272129

E mail@rls.si

[www.rls.si](http://www.rls.si)

## Document issues

Issue	Date	Page	Corrections made
1	23. 6. 2020	General	New document
2	16. 7. 2020	General	Moment of inertia and mass of all rings amended

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS merilna tehnika d.o.o., are available at <https://www.rls.si/customer-service>, (b) Renishaw, Inc., are available at <http://www.renishaw.com/Shop/legal/en/-42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS merilna tehnika d.o.o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS merilna tehnika d.o.o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2020 RLS d.o.o.