
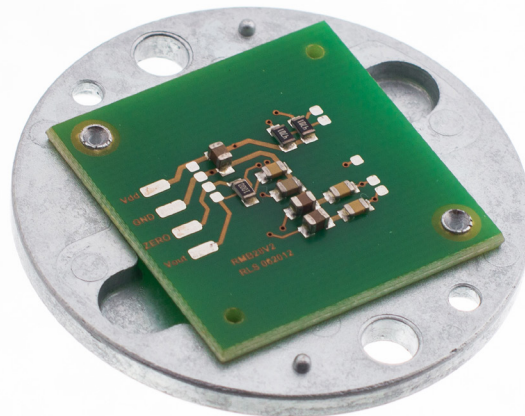


## RMB28 / RMF44 angular magnetic encoder modules

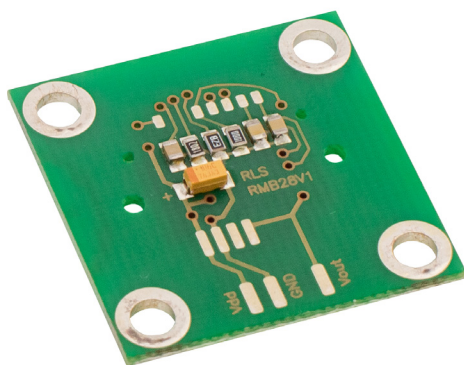

The images do not represent all variants.

**The RMB28 encoder module is designed for direct integration into high volume OEM applications. The inexpensive 28 mm square PCB can also be supplied with a connector or as RMF44 on a metal flange with 44 mm diameter for easy mounting.**

The encoder module consists of a magnetic actuator and a separate sensor board. The rotation of the magnetic actuator is detected and processed by a custom encoder chip mounted on the sensor board to obtain the desired output format. The output signals are provided in industry standard absolute, incremental, analog or linear voltage output formats.

The RMB28 and RMF44 encoder modules can be used in a wide range of OEM applications, including motor control and industrial automation.

### Product range

#### RMB28AC / RMF44AC

Analogue sinusoidal output with a single sine/cosine period per revolution.

#### RMB28DC / RMF44DC

BiSS-C interface with up to 8,192 counts per revolution.

#### RMB28I / RMF44I

Incremental with up to 2,048 counts per revolution (320 to 8,192 counts per revolution with x4 evaluation).

#### RMB28MD / RMF44MD

Sine/Cosine + Absolute binary synchro-serial + Incremental, 5V.

#### RMB28SC / RMF44SC

Synchro serial interface (SSI) with up to 8,192 counts per revolution.

#### RMB28SI / RMF44SI

Synchro serial interface (SSI) and incremental outputs.


#### RMB28Vx / RMF44Vx

Linear voltage output in a range of variants.

- 28 mm square module with the option of 44 mm diameter metal flange
- Inexpensive solution for OEM integration
- 5 V and 24 V power supply versions
- High speed operation to 60,000 rpm
- Absolute - to 13 bit resolution (8,192 counts per revolution)
- Industry standard absolute, incremental, analogue, commutation and linear voltage output formats
- Accuracy to  $\pm 0.5^\circ$
- RoHS compliant (lead free) - see Declaration of conformity

RMB28 installation drawing

Dimensions and tolerances in mm.

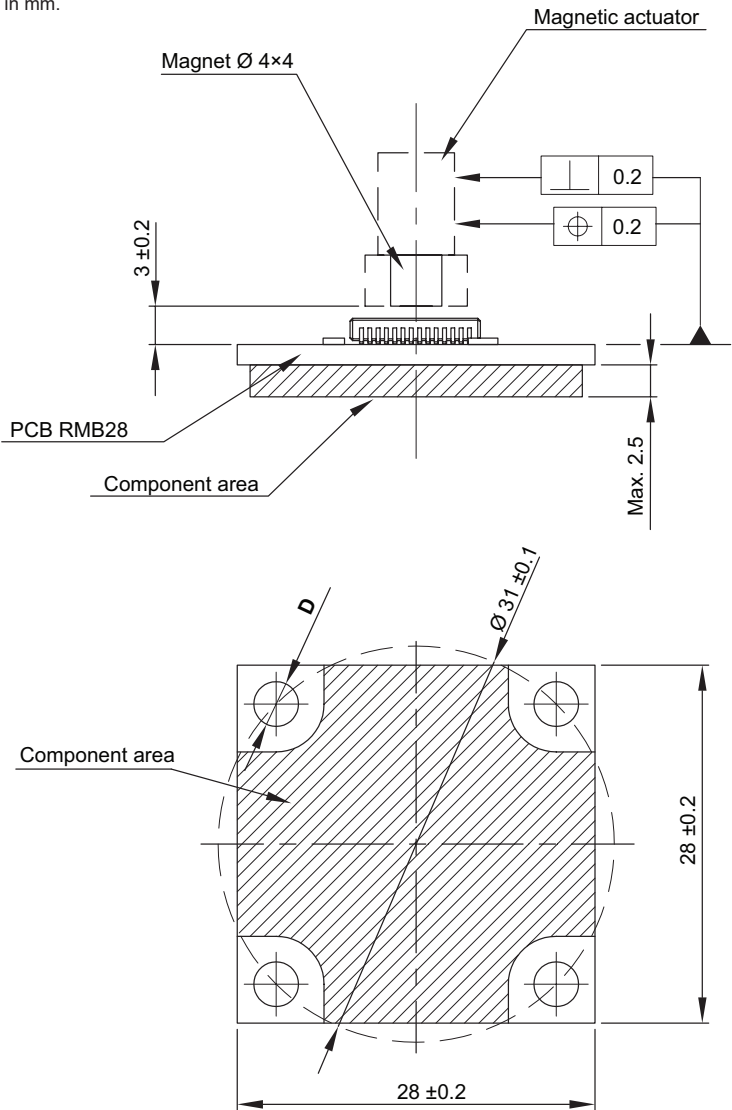



Output type	Hole diameter (D)
RMB28AC	$2.5 \pm 0.1$
RMB28DC	$2.5 \pm 0.1$
RMB28IC	$2.5 \pm 0.1$
RMB28IB	$3.5 \pm 0.1$
RMB28IE	$3.5 \pm 0.1$
RMB28MD	$3.5 \pm 0.1$
RMB28SC	$2.5 \pm 0.1$
RMB28SI	$2.5 \pm 0.1$
RMB28Vx	$3.5 \pm 0.1$



Clockwise (CW) rotation of magnet

## RMF44 installation drawing

Dimensions and tolerances in mm.

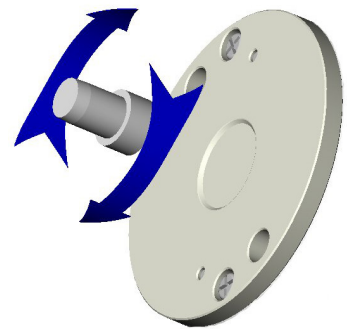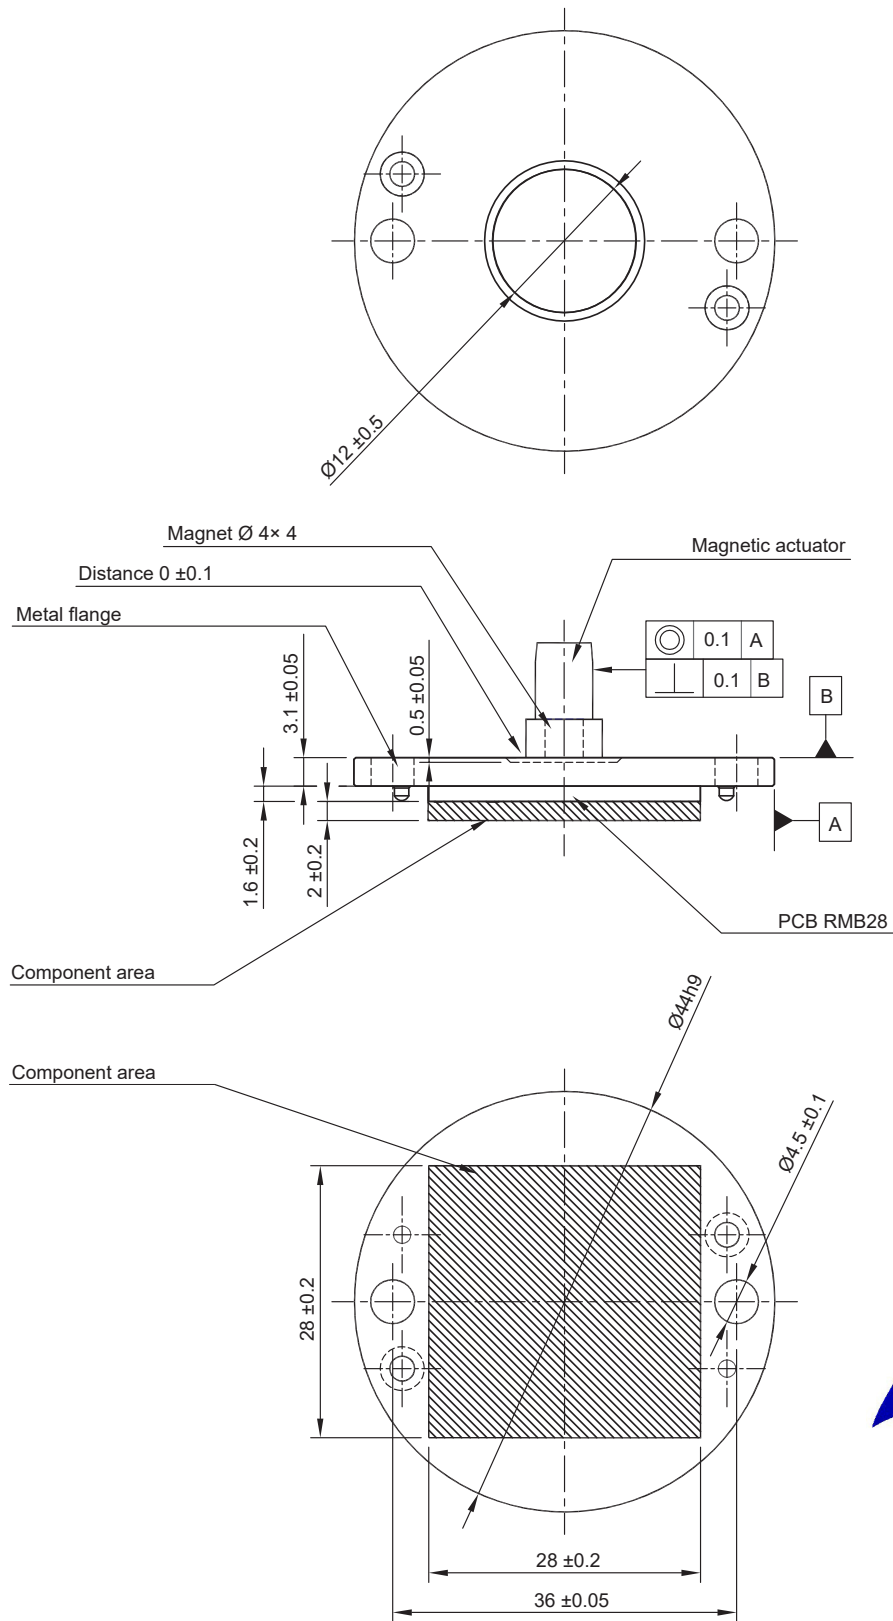


Clockwise (CW) rotation of magnet

## RMB28AC / RMF44AC – Analogue sinusoidal


2 channels VA VB sinusoids (90° phase shifted, single ended)

<b>Power supply</b>	$V_{dd} = 5\text{ V} \pm 5\%$
<b>Resolution</b>	One sine/cosine wave per revolution
<b>Current consumption</b>	13 mA
<b>Sin/Cos outputs</b>	Signal amplitude: $1.1\text{ V} \pm 0.2\text{ V}$ Signal offset: $V_{dd}/2 \pm 5\text{ mV}$
<b>Maximum speed</b>	60,000 rpm
<b>Operating temperature</b>	$-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$

### Timing diagram

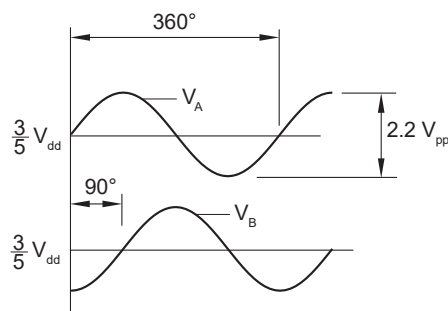

### Connections

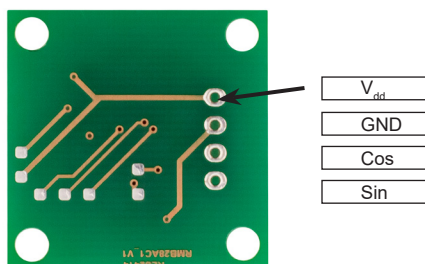


## RMB28IE / RMF44IE – Incremental, Open Collector, NPN

Low cost alternative for ball bearing encoders


<b>Power supply</b>	$V_{dd} = 5\text{ V} \pm 5\%$
<b>Current consumption</b>	35 mA (not loaded)
<b>Output signals</b>	A, B, Z
<b>Maximum output load</b>	20 mA
<b>Accuracy</b>	Typ. $\pm 0.5^{\circ}$
<b>Hysteresis</b>	$0.18^{\circ}$
<b>Resolution</b>	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution
<b>Maximum speed</b>	30,000 rpm
<b>Temperature</b>	$-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$
<b>Operating and storage</b>	

### Timing diagram

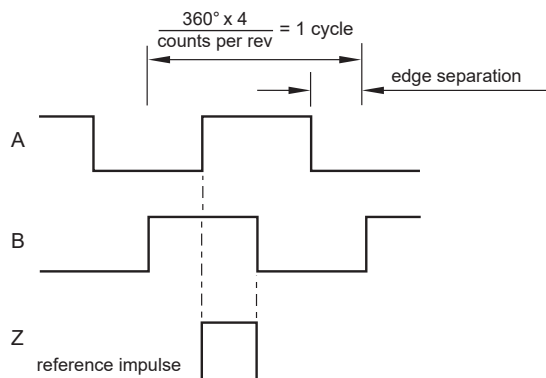


B leads A for clockwise rotation of magnet.

### Connections

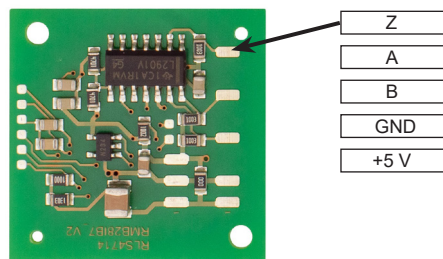

### Recommended signal termination

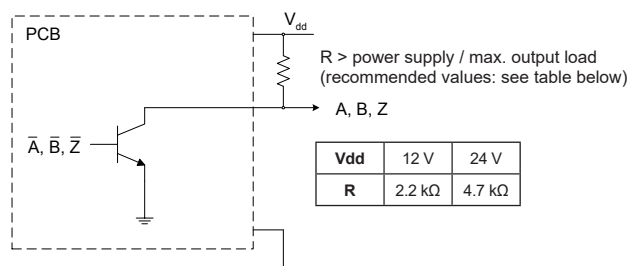


## RMB28IC / RMF44IC– Incremental, RS422

Square wave differential line driver to RS422

<b>Power supply</b>	$V_{dd} = 5\text{ V} \pm 5\%$
<b>Current consumption</b>	Max. 35 mA
<b>Output signals</b>	A, B, Z, A–, B–, Z– (RS422)
<b>Accuracy</b>	Typ. $\pm 0.5^\circ$
<b>Hysteresis</b>	$0.18^\circ$
<b>Resolution</b>	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution
<b>Maximum speed</b>	30,000 rpm
<b>Temperature</b>	$-40^\circ\text{C}$ to $+125^\circ\text{C}$
Operating and storage	$-40^\circ\text{C}$ to $+105^\circ\text{C}$ (with connector)

### Connections

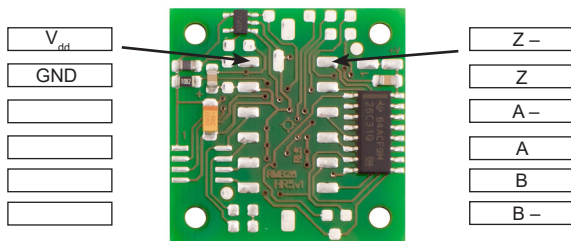


### Connector type

Molex 43045-1219


**Mating connector** (Not provided)

Molex 43025-1200 (crimp terminal 43030-xxxx)




### Timing diagram

Complementary signals not shown

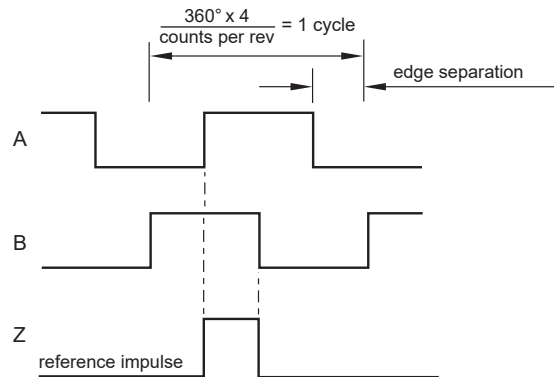

B leads A for clockwise rotation of magnet.

### Recommended signal termination

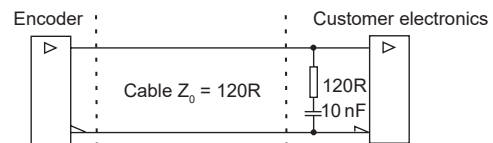


## RMB28SC / RMF44SC – Absolute binary synchro-serial (SSI), RS422

Serial encoded absolute position measurement

<b>Output code</b>	Natural binary
<b>Power supply</b>	$V_{dd} = 5\text{ V} \pm 5\%$
<b>Current consumption</b>	Max. 35 mA
<b>Data output</b>	Serial data (RS422)
<b>Data input</b>	Clock (RS422)
<b>Accuracy</b>	Typ. $\pm 0.5^\circ$
<b>Hysteresis</b>	$0.18^\circ$
<b>Resolution</b>	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution
<b>Maximum speed</b>	30,000 rpm
<b>Temperature</b>	$-40^\circ\text{C}$ to $+125^\circ\text{C}$
Operating and storage	$-40^\circ\text{C}$ to $+105^\circ\text{C}$ (with connector)


### Timing diagram

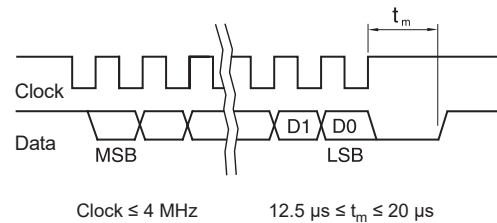


Position increases for clockwise rotation of magnet.

### Recommended signal termination

For data output lines only

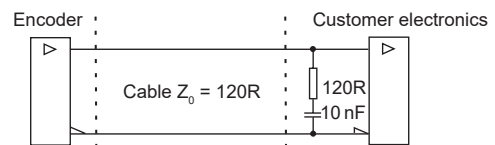

### Connections

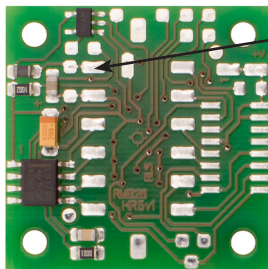


$V_{dd}$
GND
Clock
Clock –
Data –
Data

### Connector type

Molex 43045-1219

### Mating connector (Not provided)

Molex 43025-1200 (crimp terminal 43030-xxxx)




## RMB28SI / RMF44SI – Absolute binary synchro-serial (SSI) + Incremental, RS422

Complex feedback device for absolute position at start up as well as during operation + incremental outputs.  
Both the incremental and the SSI output always have the same fixed resolution.

<b>Output code</b>	Natural binary
<b>Power supply</b>	$V_{dd} = 5\text{ V} \pm 5\%$
<b>Current consumption</b>	Max. 35 mA
<b>Incremental outputs</b>	A, B, Z, A–, B–, Z– (RS422)
<b>Data output</b>	Serial data (RS422)
<b>Data input</b>	Clock (RS422)
<b>Accuracy</b>	Typ. $\pm 0.5^\circ$
<b>Hysteresis</b>	$0.18^\circ$
<b>Resolution</b>	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution
<b>Maximum speed</b>	30,000 rpm
<b>Temperature</b>	$-40^\circ\text{C}$ to $+125^\circ\text{C}$
<b>Operating and storage</b>	$-40^\circ\text{C}$ to $+105^\circ\text{C}$ (with connector)

### Connections

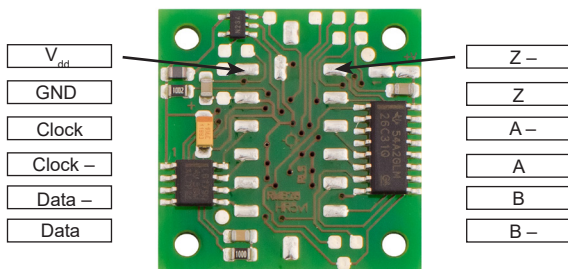


### Connector type


Molex 43045-1219

### Mating connector (Not provided)

Molex 43025-1200 (crimp terminal 43030-xxxx)




### Timing diagram - SSI

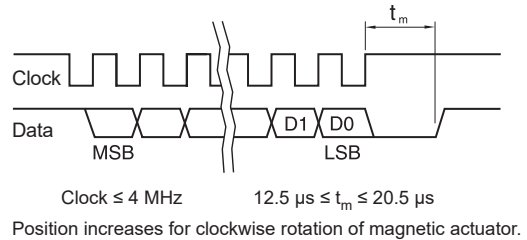

### Timing diagram - Incremental


Complementary signals not shown

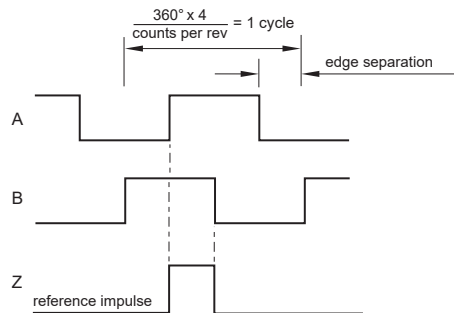

B leads A for clockwise rotation of magnetic actuator.

### Recommended signal termination

For incremental signals + SSI data output lines only

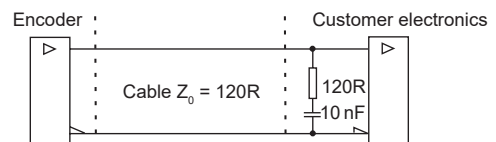


## RMB28DC / RMF44DC – Absolute encoder with BiSS-C interface

Serial encoded absolute position measurement


Output code	Natural binary
Power supply	$V_{dd} = 5\text{ V} \pm 5\%$
Current consumption	Max. 50 mA
Clock input	MA (RS422)
Data output	SLO (RS422)
Accuracy	Typ. $\pm 0.5^\circ$
Hysteresis	$0.18^\circ$
Resolution	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 positions per revolution
Maximum speed	30,000 rpm
Operating temperature	$-40^\circ\text{C}$ to $+125^\circ\text{C}$ $-40^\circ\text{C}$ to $+105^\circ\text{C}$ (with connector)
Max MA frequency	8 MHz

### Recommended signal termination


For data output lines only

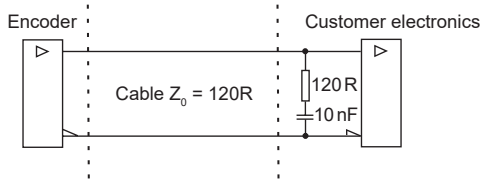

### Connections



$V_{dd}$
GND
MA+
MA-
SLO -
SLO+




### Connector type

Molex 43045-1219

**Mating connector** (Not provided)

Molex 43025-1200 (crimp terminal 43030-xxxx)

### Timing diagram – BiSS-C

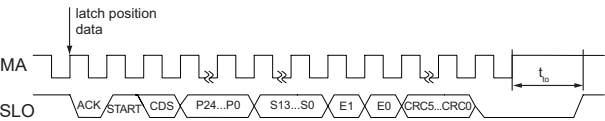

Data	Length	Description
P24 – P0	0 to 24 bit	Revolution counter value (length depends on the settings chosen)
S12 – S0	3 to 13 bit	Position inside the revolution (length depends on the resolution)
E1 – E0	2 bit	Error data
CRC5 – CRC0	5 to 6 bit	Cyclic redundancy check data; polynomial 0x43; inverted bit output

Error	E0	E1
No error	1	1
Amplitude error	0	1
Too high velocity	1	0
Undervoltage; Configuration; System error	0	0

For more information on BiSS-C protocol please visit [www.biss-interface.com](http://www.biss-interface.com).




## RMB28MD / RMF44MD – Sine/Cosine + Absolute binary synchro-serial (SSI) + Incremental


Complex feedback device for absolute position at start-up as well as during operation + incremental outputs

<b>Output code</b>	Natural binary
<b>Power supply</b>	$V_{dd} = 5\text{ V} \pm 5\%$
<b>Current consumption</b>	13 mA – incremental and SSI (not loaded)
<b>Incremental outputs</b>	A, B, Z
<b>Sin/Cos outputs</b>	Signal amplitude: $1.1\text{ V} \pm 0.2\text{ V}$ Signal offset: $V_{dd}/2 \pm 5\text{ mV}$
<b>Data output</b>	Serial data
<b>Data input</b>	Clock
<b>Accuracy</b>	$\pm 0.7^\circ$
<b>Hysteresis</b>	$0.45^\circ$
<b>Resolution</b>	8 bit + 64 ppr (256 cpr) + one sine/ cosine period per revolution
<b>Maximum speed</b>	60,000 rpm
<b>Temperature</b>	$-40^\circ\text{C}$ to $+125^\circ\text{C}$
Operating and storage	

### Connections

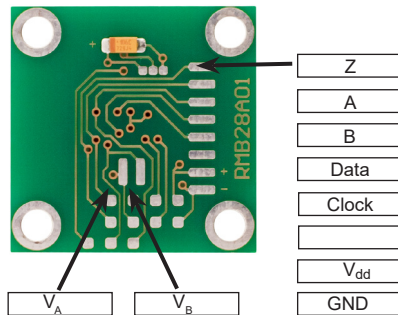


### Timing diagram - SSI

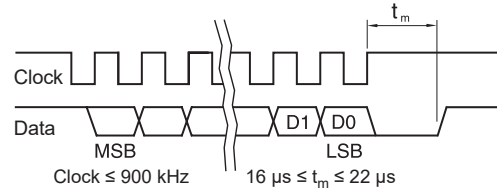


Position increases for clockwise rotation of magnet.

### Timing diagram - Incremental

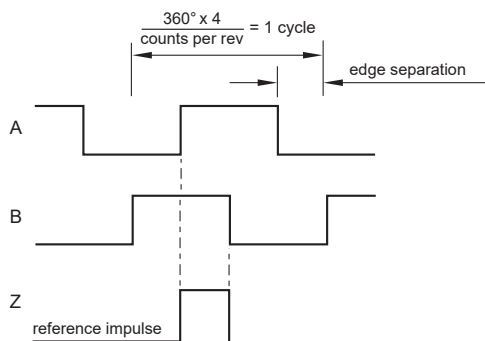

B leads A for clockwise rotation of magnet.


### Timing diagram - Sine/Cosine

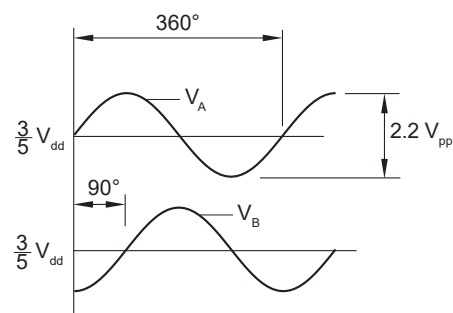

RMB28Vx / RMF44Vx – Linear voltage output  
Alternative for potentiometers

Power supply	$V_{dd} = 5\text{ V} \pm 5\%$
Current consumption	Typ. 26 mA
Output voltage	0 V to $V_{dd}$
Output loading	Max. 2 mA
Nonlinearity	1 %
Resolution of DAC	10 bit
Maximum speed	30,000 rpm
Temperature Operating and storage	$-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$



Connections

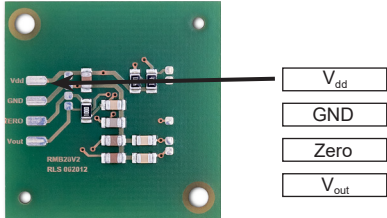

The digital relative angular position information is converted into linear voltage with a built-in 10 bit D/A converter. The linear output voltage swing ranges from 0 V and  $V_{dd}$  (5 V). The number of periods within one revolution ( $N_{\text{period}}$ ) can be 1, 2, 4 or 8, representing one full swing over an angle ( $\phi_{\text{period}}$ ) of  $360^{\circ}$ ,  $180^{\circ}$ ,  $90^{\circ}$  or  $45^{\circ}$  respectively. The signal is made up of steps which represent the angular movement needed to register a change in the position ( $\phi_{\text{step}}$ ) and the resulting change in the output voltage ( $V_{\text{step}}$ ). The number of steps in one period ( $N_{\text{step}}$ ) is given in the table below.

For clockwise rotation of the magnetic actuator, the output voltage increases. For counterclockwise rotation, the output voltage decreases.

Timing diagram for linear voltage output

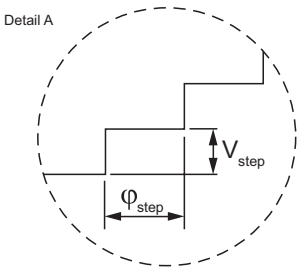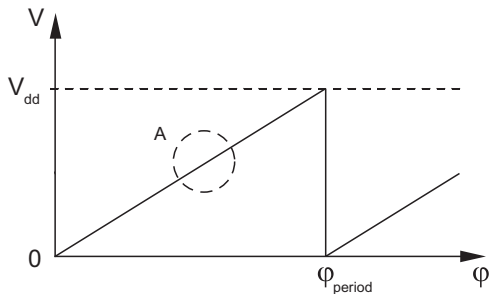

$$\phi_{\text{step}} = \frac{\phi_{\text{period}}}{N_{\text{step}}} \quad V_{\text{step}} = \frac{V_{dd}}{N_{\text{step}}}$$

- $\phi_{\text{period}}$  = Angle covered in one period (one sawtooth)
- $V_{\text{period}}$  = Output voltage range for one period
- $\phi_{\text{step}}$  = Step angle (angular movement needed to register a change in the position)
- $V_{\text{step}}$  = Output voltage range for one step
- $N_{\text{period}}$  = Number of periods in one revolution
- $N_{\text{step}}$  = Number of steps in one period

$\phi_{\text{period}}$	$N_{\text{period}}$	$N_{\text{step}}$	$\phi_{\text{step}}$
$360^{\circ}$	1	1024	$0.35^{\circ}$
$180^{\circ}$	2	1024	$0.18^{\circ}$
$90^{\circ}$	4	1024	$0.09^{\circ}$
$45^{\circ}$	8	512	$0.09^{\circ}$

Output type and electrical variant


$\phi_{\text{period}}$	$360^{\circ}$	$180^{\circ}$	$90^{\circ}$	$45^{\circ}$
Rotation				
Clockwise	VA	VB	VC	VD
Counterclockwise	VE	VF	VG	VH

## RMB28IB / RMF44IB – Incremental, Open Collector, NPN

Square wave output


<b>Power supply</b>	$V_{dd} = 8 \text{ V to } 26 \text{ V}$
<b>Current consumption</b>	50 mA
<b>Output signals</b>	A, B, Z
<b>Maximum output load</b>	20 mA
<b>Accuracy</b>	Typ. $\pm 0.5^\circ$
<b>Hysteresis</b>	$0.18^\circ$
<b>Resolution</b>	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
<b>Maximum speed</b>	30,000 rpm
<b>Temperature</b> Operating and storage	$-40^\circ \text{C to } +125^\circ \text{C}$

### Timing diagram

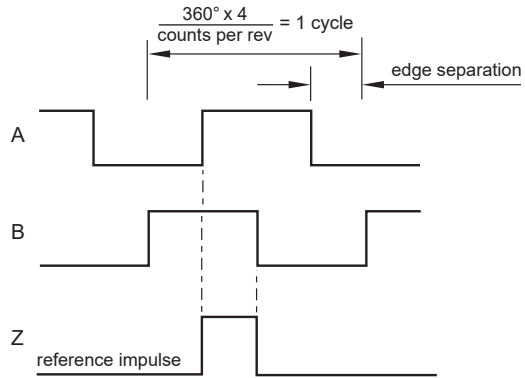


B leads A for clockwise rotation of magnet.

### Connections


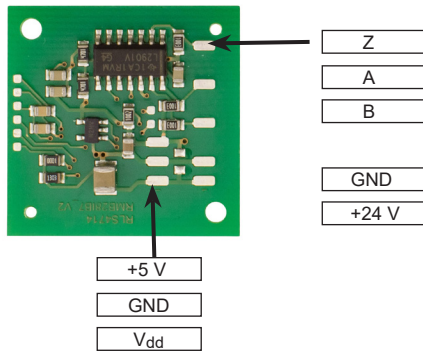


### Recommended signal termination

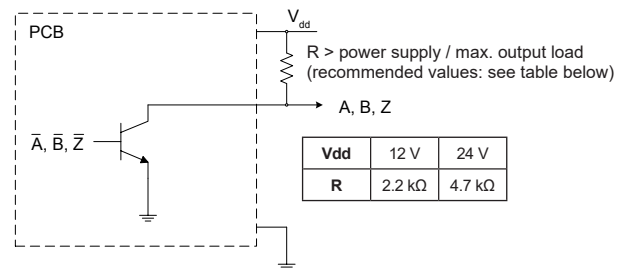

**NOTE:** RMB28IB / RMF44IB boards need 2 power supplies; pad  $V_{dd}$  needs 24 V and pad +5 V needs 5 V. Pads  $V_{in}$ , GND and +5 V have been provided to allow easy connection to a 3 terminal voltage regulator to generate 5 V from 24 V.

Part numbering

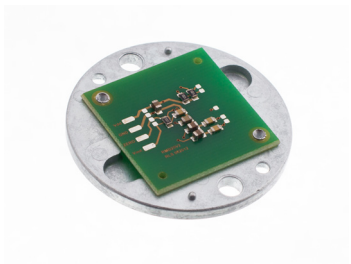

**RMF44**   **IC**   **08B**   **A**   **10**

**Series**  
**RMB28**  
**RMF44** - RMB28 encoder module on 44 mm diameter metal flange

**Output type**  
**AC** - Analogue sinusoidal, 5 V  
**DC** - BiSS, RS422, 5 V  
**IB** - Incremental, open collector, NPN, 24 V  
**IC** - Incremental, RS422, 5 V  
**IE** - Incremental, open collector, NPN, 5 V  
**MD** - SSI + Incremental + Analogue sinusoidal, 5 V  
**SC** - Absolute binary synchro-serial (SSI), RS422, 5 V  
**SI** - SSI + Incremental, RS422, 5 V

**Vx** - Linear voltage

Linear voltage output 0 - 5 V, supply 5 V DC				
	360°	180°	90°	45°
CW	<b>VA</b>	<b>VB</b>	<b>VC</b>	<b>VD</b>
CCW	<b>VE</b>	<b>VF</b>	<b>VG</b>	<b>VH</b>

**NOTE:** Not all combinations are valid.

**Special requirements**  
**10** - No special requirements (standard)  
**11** - With Molex connector (for **IC**, **SC** and **SI**)

**Shape**  
**S** - Square (for RMB28)  
**A** - Standard 44 mm diameter aluminium flange (for RMF44)

**Resolution**  
For **AC**:  
**01S** - One sine/cosine wave per revolution

For **MD**:  
**08B** - 256 counts or positions per revolution


For **DC**, **IB**, **IC**, **IE**, **SC** and **SI** (counts/positions per revolution):

Decimal		
<b>D32</b> - 320	<b>D80</b> - 800	<b>2D0</b> - 2000
<b>D40</b> - 400	<b>1D0</b> - 1000	
<b>D50</b> - 500	<b>1D6</b> - 1600	

Binary		
<b>07B</b> - 128	<b>10B</b> - 1024	<b>13B</b> - 8192
<b>08B</b> - 256	<b>11B</b> - 2048	
<b>09B</b> - 512	<b>12B</b> - 4096	

For **Vx**:  
**10B** - 1,024 steps per revolution

\* For sample quantities of RMB28 supplied with a magnet please add "KIT" to the end of the required RMB28 part number, eg. RMB28IC09BS10KIT.



Series	Output type	Resolution	Shape	Special requirements
RMB28 / RMF44	AC	01S	S / A	10
	MD	08B		
	Vx	10B		
	IB	2D0 / 1D6 / 1D0 / D80 / D50 / D40 / D32 / 13B / 12B / 11B / 10B / 09B / 08B / 07B		
	IE			
	IC			
	SC			
	SI			
	DC			10 / 11


## Magnetic actuator and magnet ordering information

Dimensions and tolerances in mm.

### Actuator for integration onto shaft



Shaft =  $\varnothing^*h7$   
Fixing: Grub screw provided

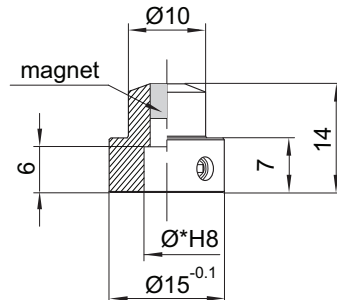

#### Part numbers:


For resolutions up to 9 bit absolute (512 cpr incremental)

<b>RMA04A2A00</b> – Ø4 mm shaft	<b>RMA10A2A00</b> – Ø10 mm shaft
<b>RMA05A2A00</b> – Ø5 mm shaft	<b>RMA19A2A00</b> – Ø3/16" shaft
<b>RMA06A2A00</b> – Ø6 mm shaft	<b>RMA25A2A00</b> – Ø1/4" shaft
<b>RMA08A2A00</b> – Ø8 mm shaft	<b>RMA37A2A00</b> – Ø3/8" shaft

For resolutions from 10 bit absolute (800 cpr incremental) and above

<b>RMA04A3A00</b> – Ø4 mm shaft	<b>RMA10A3A00</b> – Ø10 mm shaft
<b>RMA05A3A00</b> – Ø5 mm shaft	<b>RMA19A3A00</b> – Ø3/16" shaft
<b>RMA06A3A00</b> – Ø6 mm shaft	<b>RMA25A3A00</b> – Ø1/4" shaft
<b>RMA08A3A00</b> – Ø8 mm shaft	<b>RMA37A3A00</b> – Ø3/8" shaft

### Actuator for integration into shaft

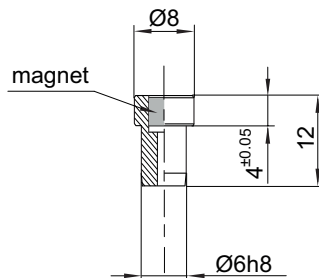

#### Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)

**RMH06A2A00**

For resolutions from 10 bit absolute (800 cpr incremental) and above

**RMH06A3A00**

#### With N-pole marker scribed to a $\pm 5^\circ$ accuracy:

For resolutions up to 9 bit absolute (512 cpr incremental)

**RMM06A2A02**


For resolutions from 10 bit absolute (800 cpr incremental) and above

**RMM06A3A02**

Hole = Ø6G7

Fixing: Glue (recommended – LOCTITE 648 or LOCTITE 2701)

### Magnet for direct recessing in non-ferrous shafts



Fixing: Glue (recommended – LOCTITE 648 or LOCTITE 2701)

#### Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)

**RMM44A2A00** (individually packed) – for sample quantities only  
**RMM44A2C00** (packed in tubes)

For resolutions from 10 bit absolute (800 cpr incremental) and above

**RMM44A3A00** (individually packed) – for sample quantities only  
**RMM44A3C00** (packed in tubes)

## Head office

### RLS merilna tehnika d.o.o.

Poslovna cona Žeje pri Komendi  
Pod vrbami 2  
SI-1218 Komenda  
Slovenia

**T** +386 1 5272100

**F** +386 1 5272129

**E** [mail@rls.si](mailto:mail@rls.si)

**www.rls.si**

## Document issues

Issue	Date	Page	Amendments done
9	8. 3. 2017	General	RMF44 added
10	1. 2. 2018	3	RMF44 installation drawing amended
11	18. 5. 2018	3	RMF44 installation drawing amended
		4 - 6, 8, 9	Resolutions amended
12	27. 7. 2018	General	Resolution amended
13	17. 9. 2018	3	RMF44 installation drawing amended
14	29. 8. 2019	3	RMF44 installation drawing amended
15	19. 12. 2019	4, 10	Signal termination amended
16	13. 5. 2020	4	Recommended signal termination for RMB28IE / RMF44IE amended
		2, 8, 12	RMB28DC / RMF44DC added

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS merilna tehnika d.o.o., are available at <https://www.rls.si/customer-service>, (b) Renishaw, Inc., are available at <http://www.renishaw.com/Shop/legal/en/-42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS merilna tehnika d.o.o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS merilna tehnika d.o.o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2020 RLS d.o.o.