


# RE58 encoder flanges

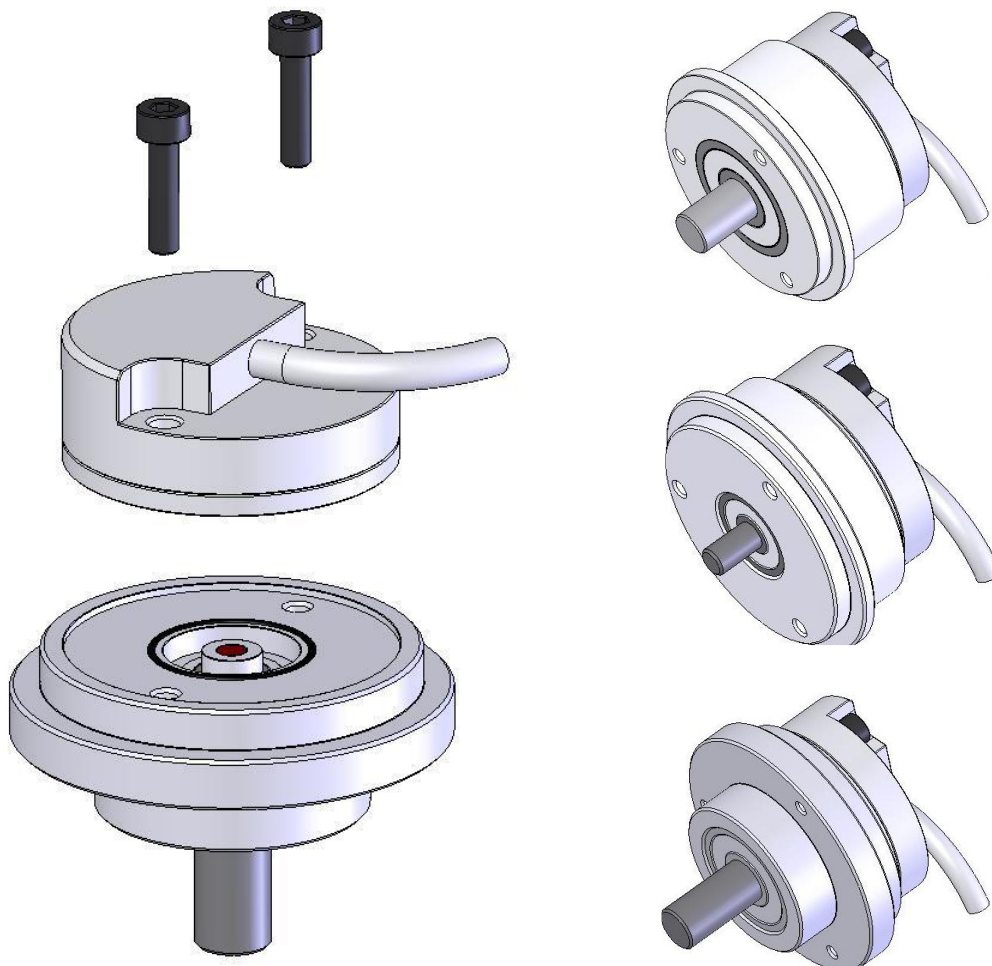

## General description

**The RE58 is a modular bearing/shaft encoder system that has been designed for easy integration to existing 58 mm syncro flange and clamp applications.**

The modular design combines the benefits of the non-contact OnAxis™ magnetic encoder technology with existing industrial encoder designs. The non-contact RM44 encoder used on the back of the bearing/shaft assembly provides ultimate reliability in harsh environmental conditions

where other encoders would fail. Even if the bearing/shaft fails it can be easily replaced without damaging the RM44 encoder.



The RM44 encoder offers a wide range of output options including incremental, absolute and analogue protocols with up to 13 bit (8192 counts per rev) resolution.

## System features

- Standard 58 mm diameter flange options
- Robust modular design
- Industry standard absolute, incremental and analogue output options
- Resolutions to 13 bit (8192 counts per rev)
- Easy to service
- Low cost of ownership



RE58A10 dimensions

NOTE: RM44 encoder is shown fitted to flange for clarity

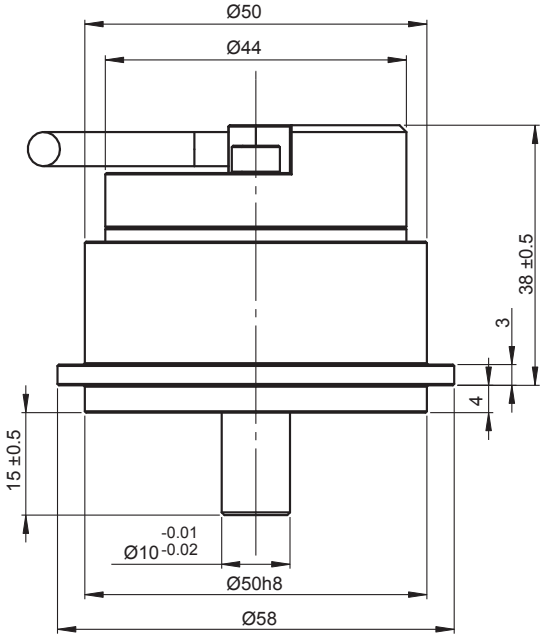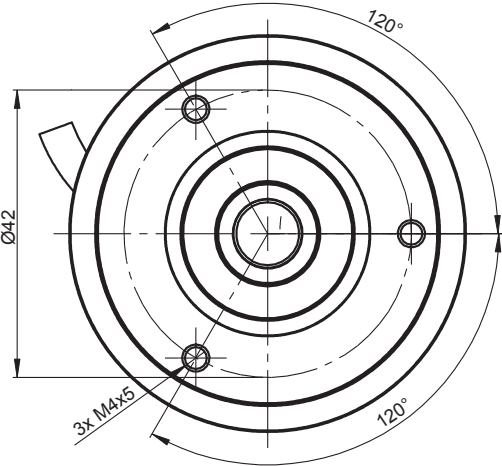



RE58B06 dimensions

NOTE: RM44 encoder is shown fitted to flange for clarity

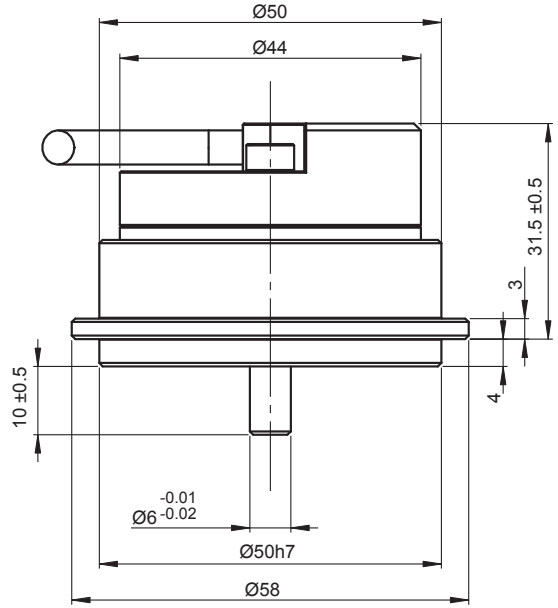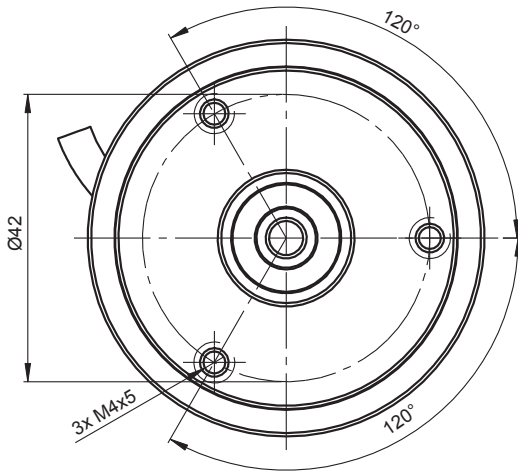

RE58C10 dimensions

NOTE: RM44 encoder is shown fitted to flange for clarity

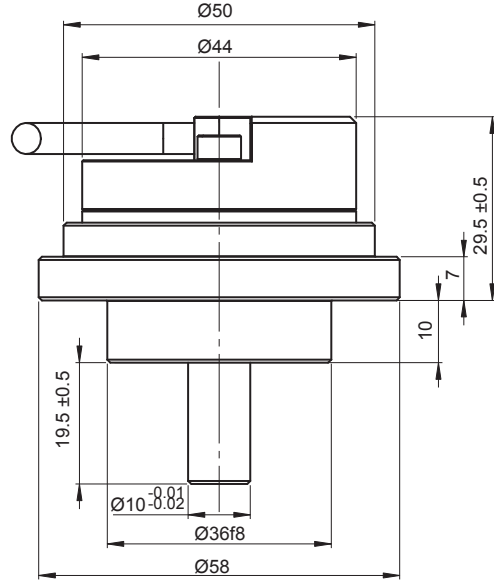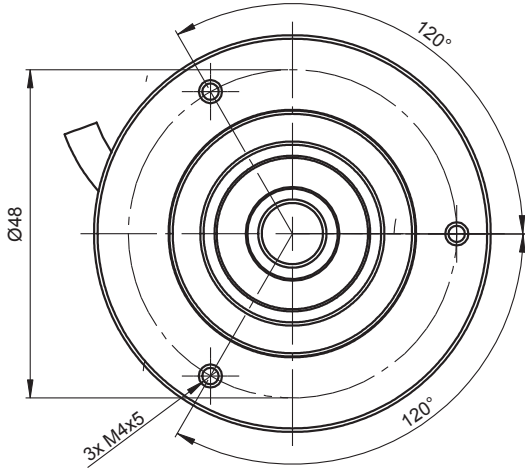

## Tables of expected bearing life ratings in hours

### RE58A10

Speed (rpm)	Radial load 10 N	Radial load 20 N	Radial load 30 N	Radial load 40 N	Radial load 50N	Radial load 60N	Radial load 70N	Radial load 80N
500	4,985,733	3,174,333	2,144,167	1,515,633	1,110,633	837,967	647,733	510,967
1,000	2,492,867	1,587,167	1,072,083	757,817	555,317	418,983	323,867	255,483
2,000	1,246,433	793,583	536,042	378,908	277,658	209,492	161,933	127,742
5,000	498,573	317,433	214,417	151,563	111,063	83,797	64,773	51,097
10,000	249,287	158,717	107,208	75,782	55,532	41,898	32,387	25,548
12,000	207,739	132,264	89,340	63,151	46,276	34,915	26,989	21,290

Maximum recommended shaft loads: radial 80N, axial 40N

### RE58B06

Speed (rpm)	Radial load 10 N	Radial load 15 N	Radial load 20 N	Radial load 25 N	Radial load 30N
500	1,697,000	1,041,367	684,300	473,500	341,100
1,000	848,500	520,683	342,150	236,750	170,550
2,000	424,250	260,342	171,075	118,375	85,275
5,000	169,700	104,137	68,430	47,350	34,110
10,000	84,850	52,068	34,215	23,675	17,055
15,000	56,567	34,712	22,810	15,783	11,370
20,000	42,425	26,034	17,108	11,838	8,528


Maximum recommended shaft loads: radial 30N, axial 15N

### RE58C10

Speed (rpm)	Radial load 10 N	Radial load 20 N	Radial load 30 N	Radial load 40 N	Radial load 50N	Radial load 60N
500	6,656,767	3,483,867	2,046,033	1,302,133	879,300	621,400
1,000	3,328,383	1,741,933	1,023,017	651,067	439,650	310,700
2,000	1,664,192	870,967	511,508	325,533	219,825	155,350
5,000	665,677	348,387	204,603	130,213	87,930	62,140
10,000	332,838	174,193	102,302	65,107	43,965	31,070
12,000	277,365	145,161	85,251	54,256	36,638	25,892


Maximum recommended shaft loads: radial 60N, axial 30N

## RE58 encoder system

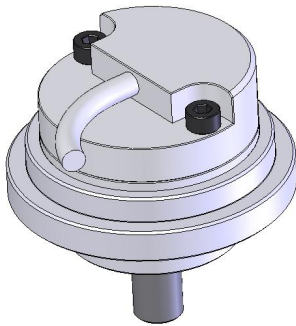

=


## RM44 encoder

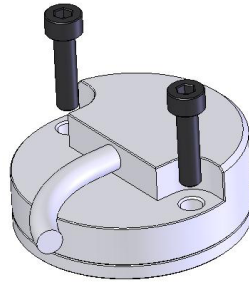

Encoder part numbering  
eg **RM44IC0013B10F2F10**

+

## RE58 flange

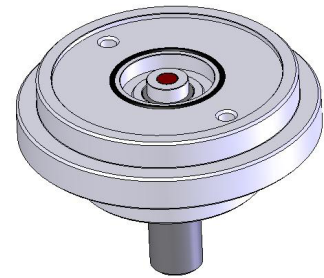

Flange part numbering  
eg **RE58C10**

## RE58 flange part numbering

**RE58A10** - Ø58 mm 10 mm shaft  
**RE58B06** - Ø58 mm 6 mm shaft  
**RE58C10** - Ø58 mm 10 mm shaft

All RE58 flanges are supplied with required washer and M4 screws for RM44 encoder attachment.

## RM44 encoder part numbering

Refer to RM44 datasheet for full product specifications.

**RM44 IC 00 13B 10 F 2 F 10**

**Series** ————

**Output type** ————

**AC** - Analogue sinusoidal, 5 V  
**IA** - Incremental, push pull, 24 V  
**IB** - Incremental, open collector NPN, 24 V  
**IC** - Incremental, RS422A, 5 V  
**IE** - Incremental, open collector, 5 V  
**SC** - Absolute binary synchro-serial (SSI), RS422A, 5 V  
**SI** - SSI + Incremental, RS422A, 5 V  
**V<sub>x</sub>** - Linear voltage:

Linear voltage output 0 - 5 V, supply 5 V DC				
	360°	180°	90°	45°
CW	VA	VB	VC	VD
CCW	VE	VF	VG	VH

**Shaft size** ————

**00** - N/A

**Resolution**

**01S** - one sine/cosine period per rev (for **AC** output only)  
**07B** - 128 counts or positions per revolution (for output types **IE** and **IB**)  
**08B** - 256 counts or positions per revolution (for output types **IE** and **IB**)  
**09B** - 512 counts or positions per revolution (for output types **V<sub>x</sub>** and **IB**)

**For output types IC, IA, SC and SI:**

Decimal			Binary	
<b>D32</b> - 320	<b>D80</b> - 800	<b>2D0</b> - 2000	<b>09B</b> - 512	<b>12B</b> - 4096
<b>D40</b> - 400	<b>1D0</b> - 1000		<b>10B</b> - 1024	<b>13B</b> - 8192
<b>D50</b> - 500	<b>1D6</b> - 1600		<b>11B</b> - 2048	

**Special requirements**

**10** - No special requirements (standard)  
**18** - Extended operating temperature (for output types **IC** and **SI** with **IP64** only)\*

**Environment and material**

**E** - IP64, standard EMC grade, Zinc alloy (standard)  
**F** - IP68, standard EMC grade, Zinc alloy

**Body style and cable exit**

**2** - Cylindrical body, radial cable exit

**Connector options**

**F** - Flying lead (no connector)

**Cable length**

**10** - 1.0 meter (standard)

**NOTE:** Not all combinations are valid.

## Head office

### RLS merilna tehnika d.o.o.

Poslovna cona Žeje pri Komendi  
Pod vrbami 2  
SI-1218 Komenda  
Slovenia

**T** +386 1 5272100

**F** +386 1 5272129

**E** [mail@rls.si](mailto:mail@rls.si)

**www.rls.si**

## Document issues

Issue	Date	Page	Amendments done
01	28. 2. 2008	-	New document
02	14. 1. 2009	-	New layout

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS merilna tehnika d.o.o., are available at <https://www.rls.si/customer-service>, (b) Renishaw, Inc., are available at <http://www.renishaw.com/Shop/legal/en/-42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS merilna tehnika d.o.o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS merilna tehnika d.o.o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2018 RLS d.o.o.