

# AksIM

## Off-Axis Rotary Absolute Magnetic Encoder

AksIM™ is a non-contact high performance off-axis absolute rotary encoder designed for integration into space-constrained applications. A hollow ring, true absolute functionality and high speed operation make this encoder suitable for many applications.

The AksIM™ encoder system consists of an axially magnetised ring and a readhead.

TRUE  
ABSOLUTE

CUSTOM  
MAGNETIC  
SENSOR ASIC

NO  
HYSTERESIS



## Features and benefits

- ▶ Resolutions up to 20 bits
- ▶ Multiturn counter option
- ▶ High speed operation
- ▶ Low profile, non-contact
- ▶ Built-in self-monitoring
- ▶ Integrated status LED
- ▶ SSI, SPI, PWM, BiSS, asynchronous serial RS422 or USB communication interface
- ▶ Corrosion resistant magnetic ring



COLLABORATIVE ROBOTS



AGVs



GIMBALS



ROBOTIC JOINTS



AGRICULTURAL  
AUTOMATION

## General information

---

The encoders feature SSI, SPI, PWM, BiSS, asynchronous serial RS422 and USB communication interfaces and offer a range of binary resolutions up to 20 bits per revolution.

The encoder operates at temperatures from  $-30\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  and is shock and vibrations resistant.

The AksIM™ encoder has a built-in advanced self-monitoring function that continuously checks several internal parameters. Error reports, warnings and other status signals are available on all digital interfaces and visualised with the integrated LED.

The AksIM™ encoder system is suitable for use in industrial and medical applications.

A typical application is a robotic arm joint with a cable feed running through the ring, or a precision gearbox where the ring is attached to the main transmission shaft.

A custom design service for OEM integration is also available.

# Storage and handling

## Storage temperature



-40 °C to +85 °C

## Operating temperature




-30 °C to +85 °C

## Humidity



0 to 100 % (condensation permitted)

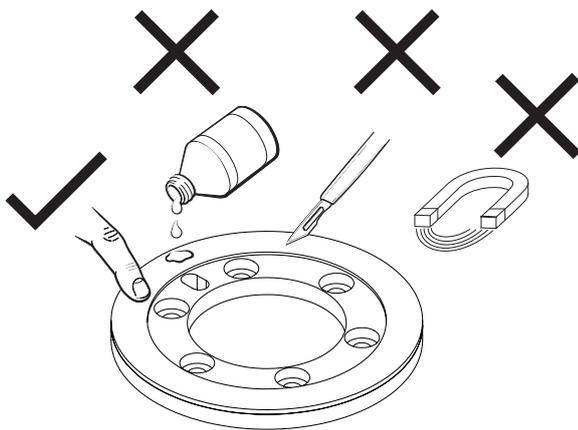

**HANDLE WITH CARE.** This encoder system is a high performance metrology product and should be treated with the same care as any other precision instrument. Use of heavy duty industrial tools or exposure to strong magnets, such as a magnetic base, is unacceptable and risks of irreparable damage to the product.

**The magnetic ring should not be exposed to magnetic field densities higher than 50 mT on its surface, as this can damage the ring.**



**Readhead is ESD sensitive - handle with care.**

Do not touch electronic circuit, wires or sensor area without proper ESD protection or outside of ESD controlled environment.

## Packaging

Readheads are packed individually in antistatic bags. Magnetic rings have two packaging options. Less than 20 products are packed individually in an antistatic box. If more than 20 magnetic rings are ordered, they are packed in antistatic plastic trays. Magnetic rings and readheads are packed separately.

Bulk packaging:


Readheads		
Part	Tray size	Box size
MHA7	– (individually)	– (individually)
MHA8		

Magnetic rings		
Part	Tray size	Box size
MRA7	10 units per tray	12 trays per box
MRA8	5 units per tray	

# Dimensions and installation drawings


Dimensions and tolerances are in mm.

## Encoder assembly MHA7 / MHA8 with MRA7D049AA025B00 ring

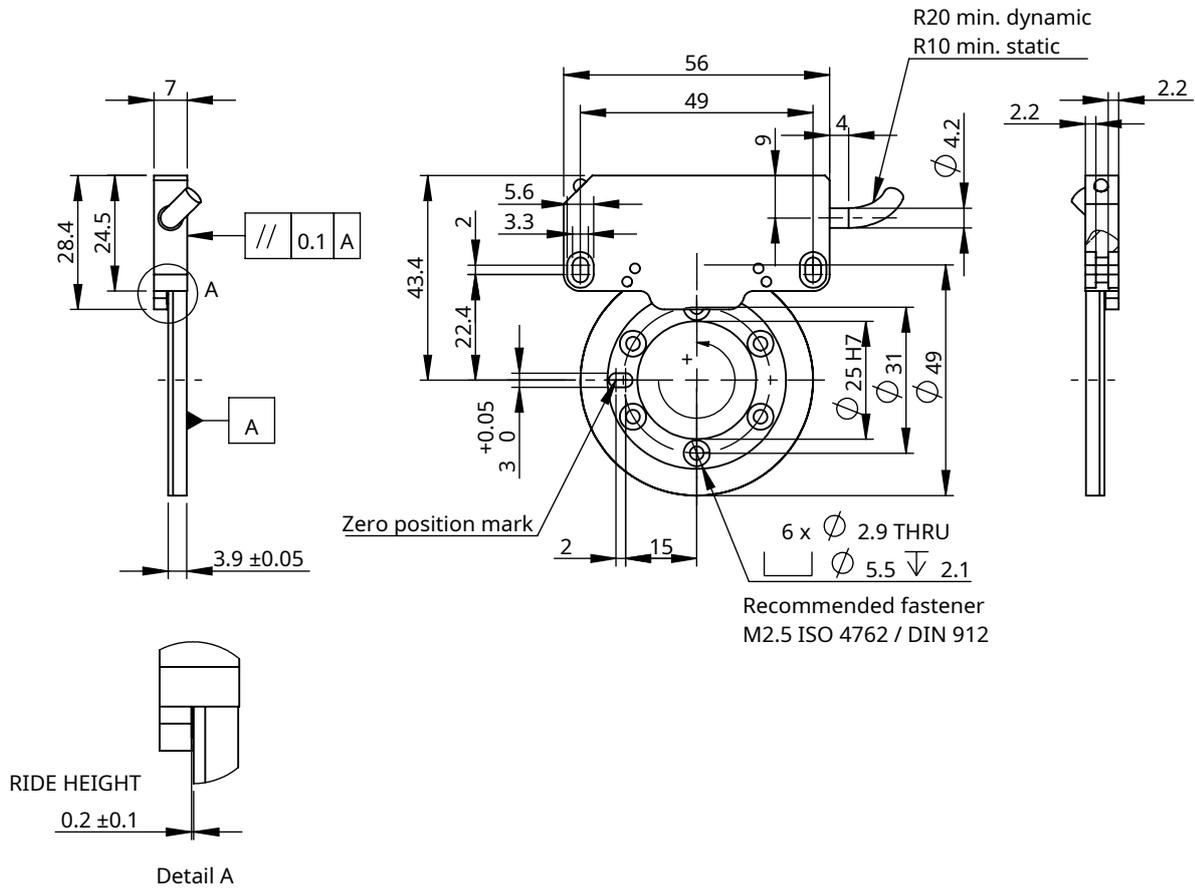

CCW positive measuring direction (ring rotation).


# Encoder assembly MHA7 / MHA8 with MRA7D049AB025E00 ring

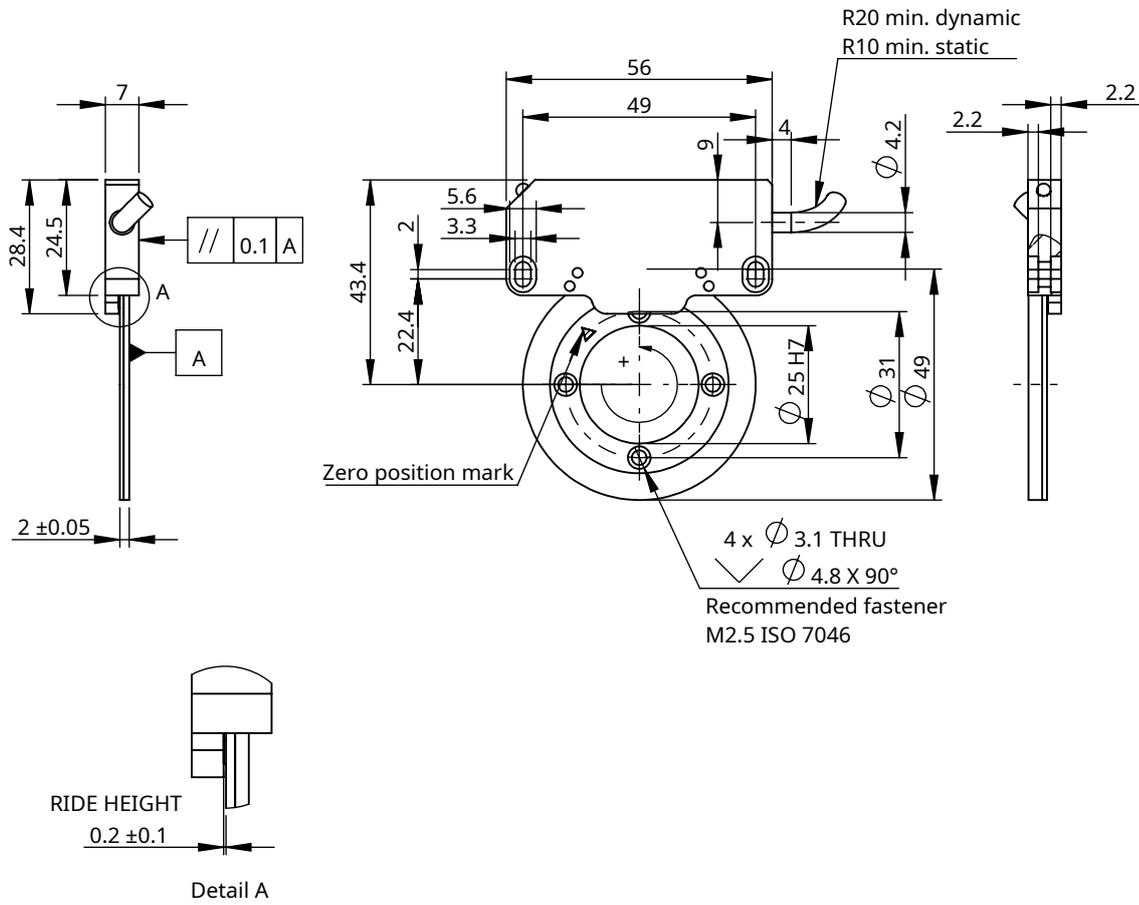

CCW positive measuring direction (ring rotation).




# Encoder assembly MHA7 / MHA8 with MRA8D080AA055B00 ring

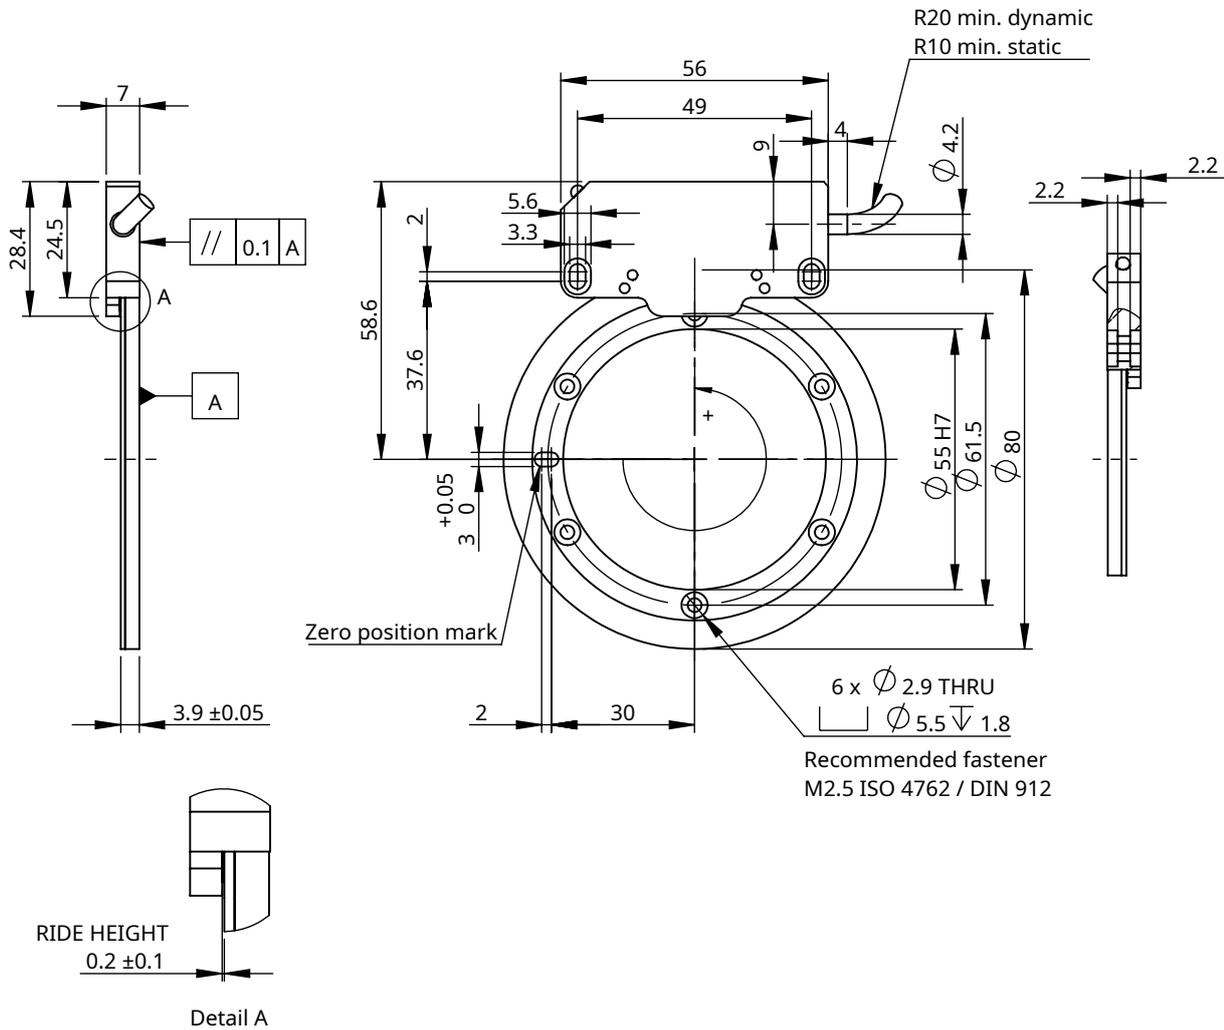


CCW positive measuring direction (ring rotation).

## Encoder assembly MHA7 / MHA8 with MRA8D080AB055E00 ring

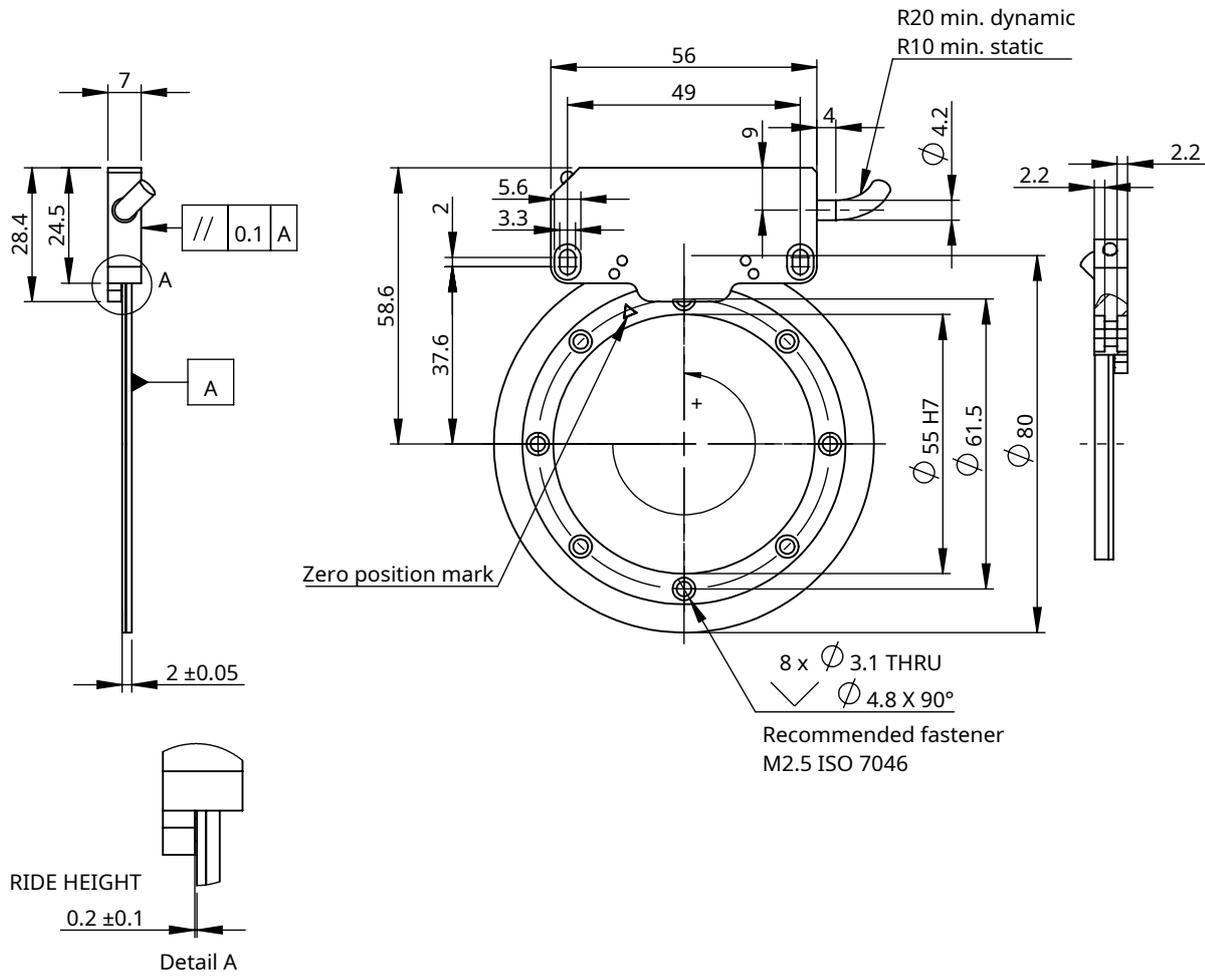


CCW positive measuring direction (ring rotation).

## Installation drawing for MHA7 and MRA7

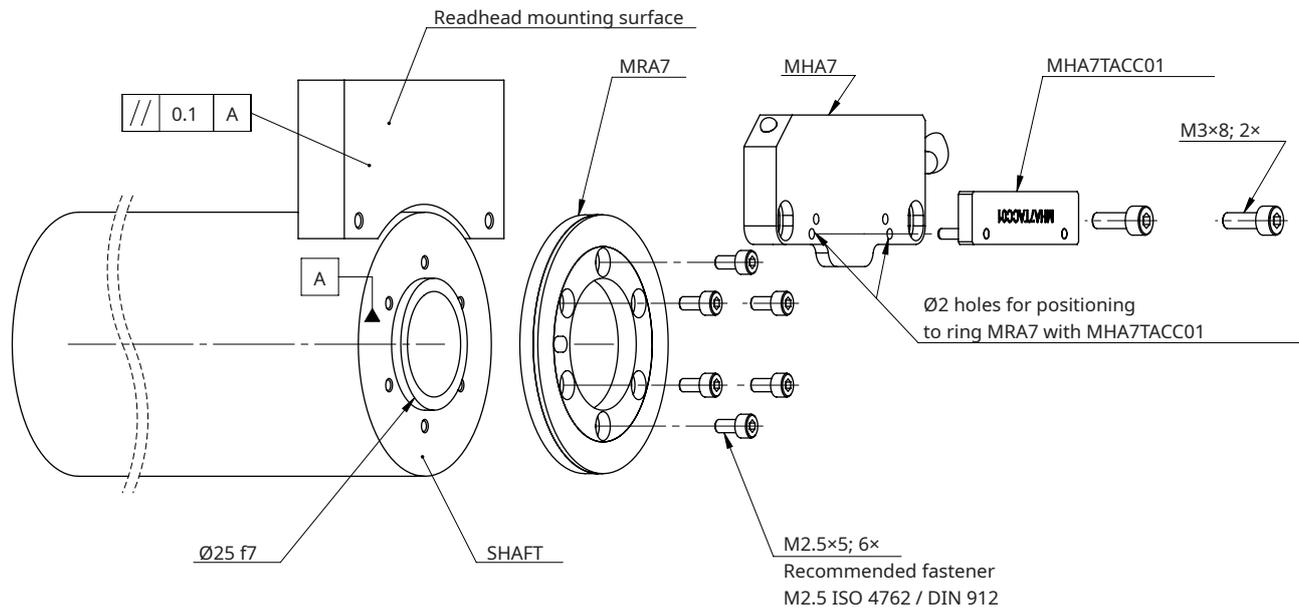

## Installation drawing for MHA8 and MRA8

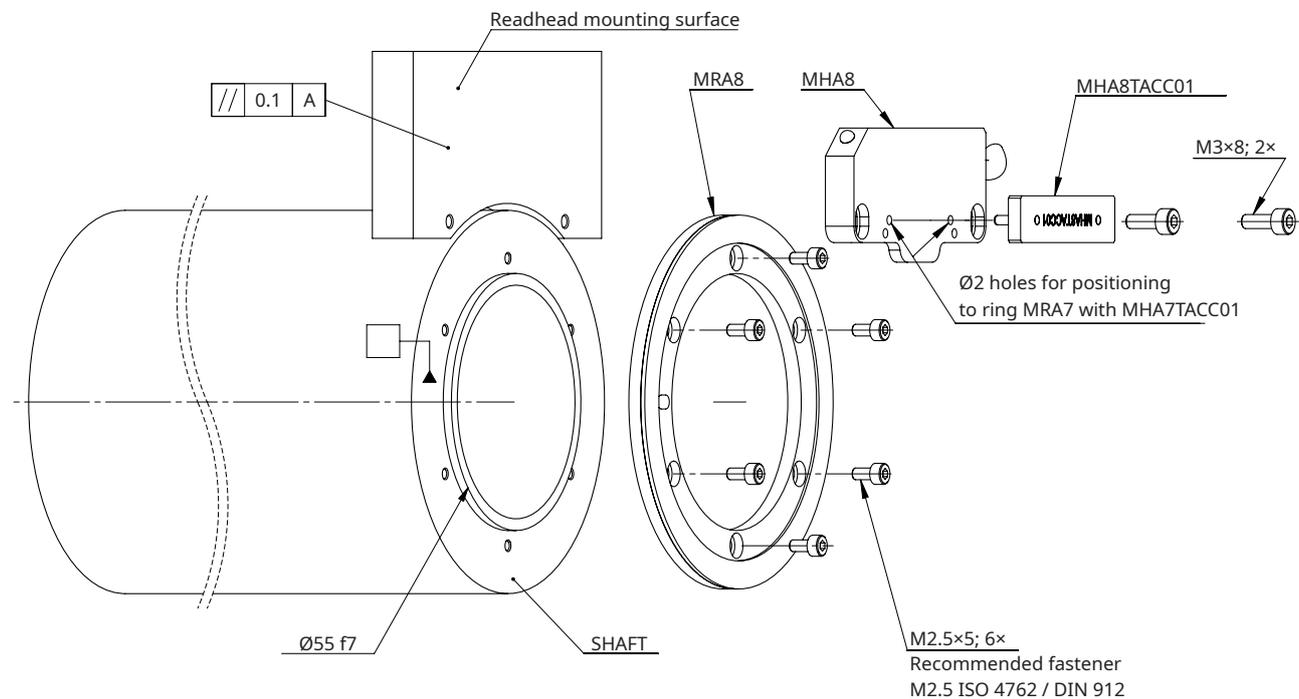

### Adjustment procedure

Loosen the mounting fasteners (M3) for the readhead. Pull the readhead away from the center of the ring. Insert the adjustment tool (MHA7ACC01 or MHA8ACC01) or two fasteners (M2x8 mm) into the assisting holes. Slide the readhead toward the ring so that assisting pins or fasteners touch the outside of the ring. Tighten the mounting fasteners. Remove the adjustment tool or assisting fasteners. Check the function of the encoder.

# Technical specifications

## System data

<b>Reading type</b>	Axial reading
<b>Resolution</b>	From 16 bit to 20 bit and 16 bit multturn counter option (see chapter <b>Resolutions</b> )
<b>Maximum speed</b>	Size 7: 9500 rpm Size 8: 4700 rpm
<b>Encoder accuracy</b>	$\pm 0.05^\circ$ (before installation - errors caused by mounting inaccuracy of the readhead, ring and drive shaft are not included)
<b>Final system accuracy</b>	Typ. $\pm 0.1^\circ$ (within defined installation tolerances - see chapter <b>Installation instructions</b> )
<b>Hysteresis</b>	Less than unit of resolution
<b>Repeatability</b>	Better than unit of resolution

## Electrical data

<b>Supply voltage</b>	4 V to 6 V – voltage on readhead. Consider voltage drop over cable.	
<b>Set-up time</b>	10 ms (first data ready after switch-on)	
<b>Power consumption</b>	Typ. 115 mA, max. 150 mA	
<b>Voltage drop over cable</b>	~ 55 mV/m – without load	
<b>Output load</b>	PWM, SPI	Max. $\pm 20$ mA
	RS422	120 mA short term, 60 mA limited
<b>ESD protection</b>	HBM, Class 2, $\pm 2$ kV (as per Mil-Std 883 Method 3015.7)	

## Mechanical data

<b>Available ring sizes (outer diameter)</b>	49 mm (ring MRA7), 80 mm (ring MRA8)	
<b>Ring material type</b>	EN 1.4005 / AISI416 or EN 1.4104 / AISI430F with glued rubber filled with ferrite particles	
<b>Mass</b>	Readhead	45 g (with 1 m cable, no connector)
	Rings	MRA7: 32 g MRA8: 64 g
<b>Inertia</b>	MRA7: 13.1 kg $\times$ mm <sup>2</sup> MRA8: 79.1 kg $\times$ mm <sup>2</sup>	
<b>Cable</b>	$\varnothing 4.2 \pm 0.2$ mm, PUR highly flexible cable, drag-chain compatible, double-shielded See chapter <b>Electrical connections</b> for detailed specifications (not valid for USB cable).	

## Environmental data

<b>Temperature</b>	Operating	-30 °C to +85 °C with static cable -10 °C to +80 °C with cable under dynamic conditions
	Storage	-40 °C to +85 °C
<b>Humidity</b>	0 to 100 % (condensation permitted)	
<b>Environmental protection</b>	IP64 (protected against dust and splashing water)	
<b>Vibrations</b>	300 m/s <sup>2</sup> 55-2000 Hz (IEC 60068-2-6)	
<b>Shock</b>	300 m/s <sup>2</sup> (IEC 60068-2-27), 11 ms, half sine	
<b>External magnetic field</b>	Max $\pm 3$ mT (DC or AC) on top side of readhead	

## Reliability data

<b>MTTF</b>	960 years at 24 hours/day operation
-------------	-------------------------------------

## Status indicator LED

The LED provides visual feedback of signal strength, error condition and is used for set-up and diagnostics. Flashing LED indicates the encoder is powered but communication has not been established. When communication is running at a rate of minimum 5 readings per second LED is constantly lit. Repeatable two short red flashes indicate the readhead can not start.

LED signal	Status
	Green Normal operation; position data is valid
	Orange Warning; position is valid, but the resolution and/or accuracy might be out of specification. Some operating conditions are outside limits.
	Red Error; position data is not valid
	No light No power supply

## Installation instructions

### Axial position adjustment (ride height)

The nominal gap between the sensor on the readhead and the rubber on the ring is  $0.2 \pm 0.1$  mm. To achieve this, the base of the ring should be in the same level as the bottom of the readhead. See section "Detail A" in the [Dimensions and installation drawings](#).

You can use any non-magnetic tool with a thickness of 0.2 mm to mechanically check the ride height between the sensor and the ring.

The integrated LED can be used as an indicator. When the correct ride height is reached, the LED glows green and does not change colour when the ring rotates.

### Radial position adjustment

The four small holes ( $\varnothing 2$  mm) on the readhead housing are used for correct radial positioning of the readhead to the ring.

When adjusting the readhead to the MRA7 ring, use the two holes that are further apart (see [Dimensions and installation drawings](#)). Use the MHA7TACC01 tool for easier adjustment (see [Accessories](#)).


When adjusting the readhead to the MRA8 ring use the two holes that are closer together (see [Dimensions and installation drawings](#)). Use the MHA8TACC01 tool for easier adjustment (see [Accessories](#)).

### Installation tolerances (readhead to ring)

<b>Axial (Z) displacement (ride height)</b>	0.2 mm nominal $\pm 0.1$ mm
<b>Radial (Y) displacement</b>	$\pm 0.3$ mm
<b>Off center (X) displacement</b>	$\pm 0.5$ mm
<b>Nonparallell mounting</b>	$\pm 0.05$ mm

### Installation tolerances (ring to shaft)

Ring/shaft fit on MRA7	Worst case accuracy
H7/g6	$\pm 0.08^\circ$
H7/f7	$\pm 0.11^\circ$
Ring/shaft fit on MRA8	Worst case accuracy
H7/g6	$\pm 0.07^\circ$
H7/f7	$\pm 0.10^\circ$

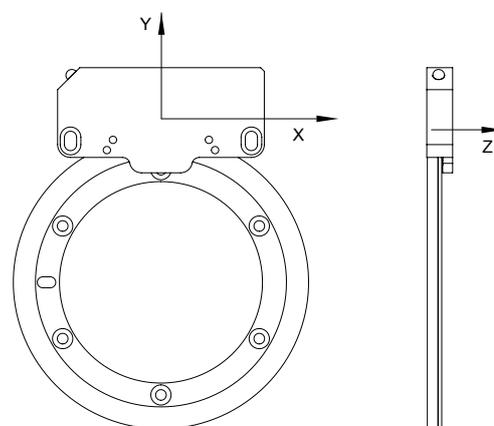


## Accuracy of the encoder system

Precise centering of the ring is key to good overall accuracy.

Minimising the eccentricity of the ring installation (using a gauge) and using a drive shaft with precision bearings, can typically reduce the error to  $\pm 0.05^\circ$  for MRA8 rings or to  $\pm 0.06^\circ$  for MRA7 rings.

A typical accuracy plot after good installation of MRA8 is shown in the graph on the right.

For highest accuracy options, [contact RLS](#).

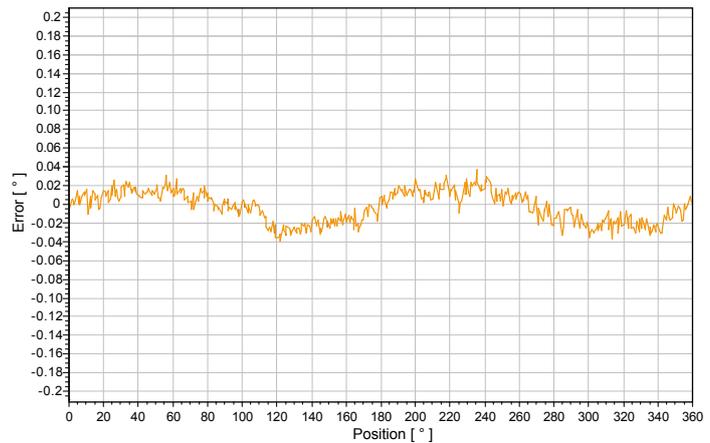

## External magnetic field

The operating principle of any magnetic encoder is to sense changes in the magnetic field of the magnetised ring. External magnetic fields generated by permanent magnets, electric motors, coils, magnetic brakes, etc., can affect the operation of the encoder. If magnetic field perpendicular to the readhead is between 0 mT and 3 mT, it can affect accuracy. If it is greater than 3 mT, it will temporarily cause the encoder to malfunction. Fields stronger than 50 mT can permanently damage the ring.

Unwanted magnetic fields must be blocked at the source. If this is not possible, the encoder can be shielded with a ferromagnetic metal plate. The ring can also be used for partial shielding. It is recommended to mount the bottom of the ring in the direction of the source of the outgoing magnetic field and to point the readhead in the other direction.

# Electrical connections

FFC connector, 6 pins, 1 mm pitch, contacts on bottom side. All data signals are 3.3 V LVTTTL. Inputs are 5 V tolerant.

Pin	Wire Colour	Asynchronous serial RS422	PWM	SSI	BiSS	SPI slave
Case	Outer shield	Encoder/machine case (Earth connection)				
1	Inner shield	0 V (GND)				
2	Red	RX data in+	-	Clock+	MA+	SCK (Clock in)
3	Blue	RX data in-	-	Clock-	MA-	$\overline{CS}$ (Chip Select)
4	Grey	-	Status	-	-	Status *
5	Brown	5 V supply				
6	Green	TX data out+	-	Data+	SLO+	MISO (Data out)
7	Yellow	TX data out-	-	Data-	SLO-	-
8	Pink	-	PWM Out	-	-	-
9	White	0 V (GND)				

\* Status signal is available only with SPS option - see SPI interface description.


For USB interface, the encoder is provided with a certified USB cable and type A connector.

Wire colors conform to the IEC 60304.


## Cable specifications

Not valid for USB cable.

<b>Outer diameter</b>	4.2 mm $\pm$ 0.2 mm
<b>Jacket material</b>	Extruded polyurethane (PUR)
<b>White wire</b>	0.9 mm $\pm$ 0.07 mm diameter, 26 AWG (19 strands REF 6), 0.13 $\Omega$ /m
<b>Other wires</b>	0.6 mm $\pm$ 0.07 mm diameter, 30 AWG (7 strands REF 6), 0.35 $\Omega$ /m
<b>Power supply lines resistance</b>	0.48 $\Omega$ /m at 20 °C
<b>Durability</b>	20 million cycles at 20 mm bend radius
<b>Bend radius</b>	Dynamic 25 mm, static 10 mm (internal radius)
<b>Weight</b>	34 g/m nominal

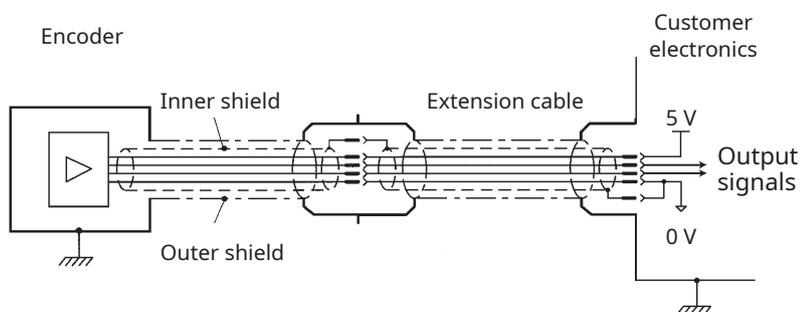

### Voltage drop over cable

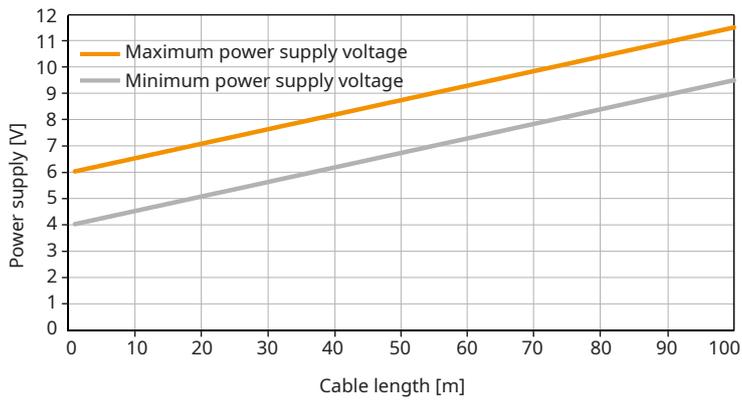

For cables longer than 5 meters input voltage on the cable must be adjusted so the voltage drop is taken into account.

## Communication interfaces

### Asynchronous serial RS422

<b>Baud rate</b>	115.2 kbps, 128 kbps, 230.4 kbps, 256 kbps, 500 kbps, 1 Mbps
<b>Data format</b>	8 bits, no parity, 1 stop bit
<b>Update rate</b>	On demand or continuous
<b>Resolution</b>	See chapter <a href="#">Resolutions</a>
<b>Latency</b>	200 $\mu$ s

### PWM

<b>Base frequency</b>	122.07 Hz, 274.66 Hz, 366.21 Hz, 549.32 Hz, 1098.6 Hz
<b>Update rate</b>	Same as Base frequency
<b>Resolution</b>	16 bits
<b>Latency</b>	200 $\mu$ s

### SSI\*

<b>Maximum clock frequency</b>	500 kHz standard 2.5 MHz with <i>Delay First Clock</i> function on the controller and short cable
<b>Update rate</b>	5 kHz
<b>Resolution</b>	See chapter <a href="#">Resolutions</a>
<b>Latency</b>	200 $\mu$ s to 400 $\mu$ s
<b>Timeout (monoflop time)</b>	20 $\mu$ s

### BiSS

<b>Maximum clock frequency</b>	5 MHz
<b>Maximum request rate</b>	31 kHz (28 kHz multiturn counter option)
<b>Bandwidth</b>	2.5 kHz max.
<b>Resolution</b>	See chapter <a href="#">Resolutions</a>
<b>Latency</b>	<10 $\mu$ s
<b>Timeout (monoflop time)</b>	20 $\mu$ s

### SPI slave\*

<b>Maximum clock frequency</b>	3 MHz at 1.5 m cable length
<b>Update rate</b>	5 kHz
<b>Resolution</b>	16 bits fixed (option S) or up to 20 bits (option A) - See chapter <a href="#">Resolutions</a>
<b>Latency</b>	200 $\mu$ s to 400 $\mu$ s

### USB

<b>Resolution</b>	17 bit for type 7 and 18 bit for type 8
<b>Latency</b>	10 ms to 50 ms (computer configuration dependent)

\* Slave type interfaces might not be suitable for high-speed closed control loops because of the variable latency time. See [Latency](#) chapter for detailed information.

## Resolutions

---

Resolution	Ring MRA7	Ring MRA8
Binary	16 bits per revolution	16 bits per revolution
	17 bits per revolution	17 bits per revolution
	18 bits per revolution *	18 bits per revolution
	19 bits per revolution *	19 bits per revolution *
		20 bits per revolution *

\* High resolution options may contain noise on the output. These resolutions are suitable for smoother operation of the control loops or averaging to get fine position. Noise margin increases exponentially with increasing ride height between the ring and readhead.

## Multiturn counter


---

On selected digital interfaces additional 16 bit counter is available to count number of shaft turns ( $\pm 32,768$  turns). Counting is available only when encoder is powered. During initialization process after switch on multiturn counter is reset to zero. Currently available only via BiSS interface. Please see [Part numbering](#) for ordering information.

# Asynchronous serial communication interface over RS422 (UART)

Encoder identification, position data and temperature are available with request-response type of communication over the asynchronous serial link. There are two unidirectional communication channels, forming a full-duplex bidirectional data link. Every channel consists of a two wire differential twisted-pair connection conforming to the RS422 signalling standard. Data is transmitted LSB first; big-endian order.

## Electrical connection

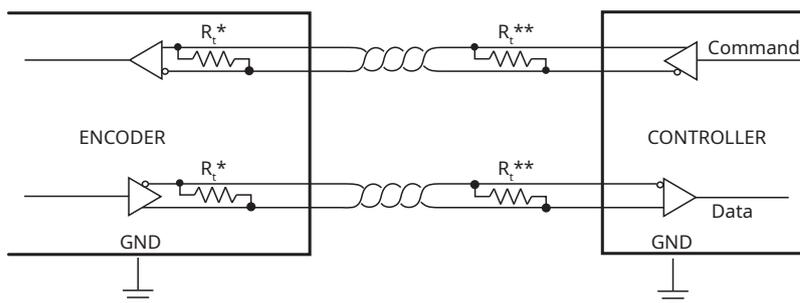

\* The Command and Data signals are 5 V RS422 compatible differential pairs with RC termination inside the readhead.

\*\* Termination at the controller is required, if total cable length is longer than 5 m. The nominal impedance of the cable is 120 Ω.

## Output protection

Excessive output current and power dissipation caused by faults or by bus contention are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state, if the chip temperature becomes too high.

## Communication parameters

<b>Character length</b>	8 bits
<b>Parity</b>	None
<b>Stop bits</b>	1
<b>Flow control</b>	None
<b>Repetition rate</b>	5 kHz max. Transmission time lowers this frequency.
<b>Position latency</b>	Fixed at 200 μs between the position acquisition and first start bit sent out. Transmission time is not included here and should be added to calculate the loop time.

Link speed is selectable by the *Communication interface variant* in the part number.

<b>Communication interface variant</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
<b>Link speed (baud rate)</b>	115.2 kbps	128 kbps	230.4 kbps	256 kbps	500 kbps	1 Mbps

Link speed setting can be changed in the field by following the procedure below.

Serial device that supports RS422 signal levels is required.

**DATA SHEET**  
**MHAD01\_13**

**Procedure:**

1. Mount the encoder according to the installation drawing. Green LED should be lit.
2. Set the serial device to the link speed of the encoder. See table on the previous page.
3. Send "v" command. Encoder should answer with a version string.
4. Send reconfiguration string. Details below.  
Encoder returns "FLASH 0" and restarts with the new settings.  
If encoder returns "RX\_ERROR" and LED turns red the procedure was not successful. Power cycle and start from the beginning.
5. Change the serial device to the new link speed.
6. Send "v" command and verify encoder is operating correctly with the new link speed.

**Configuration data to be sent:**

- 1 byte: 0x62, fixed header
- 4 bytes: new link speed, MSB first (Big endian order)
- 4 bytes: new link speed, binary inverted
- 1 byte checksum of all previous 8 bytes + data byte counter

The sequence to set link speed to 115200 baud is (hex): 62 00 01 C2 00 FF FE 3D FF 04

Checksum is calculated from all data bytes + number of data bytes (=8).

New link speed can be any number. In an example above it is 0x1C200 (hex) = 115200 (dec) baud.

Data should not be sent in a burst, but separate bytes with 1 ms delay in between.

It is not possible to revert to factory settings. New settings are permanent until encoder is reprogrammed again with different settings.

## Command set

---

### Command "v" (0x76) - version request

---

Response - version info and serial number  
 5 bytes ASCII identification string ("AksIM")  
 1 byte ASCII space character  
 8 bytes ASCII serial number  
 16 bytes ASCII part number  
 1 byte binary firmware version  
 1 byte binary communication interface version (5)  
 1 byte binary ASIC revision  
 3 bytes ASCII resolution identifier

---

### Command "1" (0x31) - single position data request

---

Response - position and status, transmitted once  
 1 byte header 0xEA  
 3 bytes binary absolute position, big-endian, left aligned  
 2 bytes encoder status - see below  
 1 byte constant footer 0xEF

---

The next request should not be sent sooner than 250  $\mu$ s after the end of the previous response from the readhead to allow refreshing of the position data. If request is sent sooner, data will arrive at the end of the refresh cycle.

---

### Command "2" (0x32) - continuous position data request

---

Response - position and status, transmitted continuously  
 1 byte constant header 0xEA  
 3 bytes binary absolute position, big-endian, left aligned  
 2 bytes encoder status - see below  
 1 byte constant footer 0xEF

---

### Command "3" (0x33) - request for continuous position data with reduced length

---

Response - position and status, transmitted continuously  
 3 bytes binary absolute position, big-endian, left aligned  
 1 byte detailed encoder status - see below

---

### Command "0" (0x30) - stop

---

Stop continuous transmission

---

### Command "4" (0x34) - single position data request including velocity information

---

Response - position, status, and velocity transmitted once  
 1 byte header 0xEA  
 3 bytes binary absolute position, big-endian, left aligned, unsigned  
 2 bytes encoder status - see below  
 3 bytes binary velocity information, right aligned, signed  
 1 byte constant footer 0xEF

---

Velocity resolution: Number of counts per 1 microsecond multiplied by 65536.  
 Counts per second (CPS) = velocity  $\times 10^6 / 2^{16}$   
 Degrees per second (DPS) = CPS  $\times 360 / 2^{20}$  (at 20-bit resolution)

---

The next request should not be sent sooner than 250  $\mu$ s after the end of the previous response from the readhead to allow refreshing of the position data. If request is sent sooner, data will arrive at the end of the refresh cycle.

---

### Command "t" (0x74) - temperature request

---

Response - temperature of the encoder  
 1 byte signed binary number - temperature of the sensor in  $^{\circ}$ C

---

Accuracy of the readings is  $\pm 3$   $^{\circ}$ C  
 This function is available with firmware version 30 and higher (see command "v" for firmware version).

---

Asynchronous serial communication interface over RS422 (UART) continued

Structure of data packet

**Encoder status (two bytes):**

---

**b15 : b10** Reserved, always zero

---

**General status**

---

**b9** Error. If bit is set, position is not valid.

---

**b8** Warning. If bit is set, encoder is near operational limits. Position is valid. Resolution and / or accuracy might be lower than specified.

---

Error and Warning bits can be set at the same time; in this case Error bit has priority. The colour of the LED on the readhead housing indicates the value of the General status bits:

● Red = Error, ● Orange = Warning, ● Green = Normal operation, ○ No light = no power supply.

The warning or error status is more closely defined by the Detailed status bits.

---

**Detailed status**

---

**b7** Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.

---

**b6** Warning - Signal amplitude low. The distance between the readhead and the ring is too large.

---

**b5** Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.

---

**b4** Warning - Temperature. The readhead temperature is out of specified range.

---

**b3** Error - Power supply error. The readhead power supply voltage is out of specified range.

---

**b2** Error - System error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.

---

**b1** Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.

---

**b0** Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.

---

# PWM - Pulse width modulation interface

The PWM communication interface consists of two digital signals: the Status signal and the PWM Out signal. It is 3.3 V TTL compatible.

## Electrical connection

The Status and PWM Out signals are 3.3 V TTL compatible. These signal outputs have weak ESD protection, therefore the readhead must be handled with additional care in ESD controlled environment and with ESD protection. Maximum current sourced from or sunk into signal lines should not exceed 20 mA.

## Status signal

The Status signal indicates the current status of the encoder. The Status signal is high for normal operation and valid position information. The low state of the Status signal indicates an error state of the encoder which can be caused by:

- Operation outside the installation tolerances
- Invalid or damaged magnetisation of the ring
- Sensor malfunction
- System error
- No power supply


When the Status signal is low, the PWM Out signal is low and no pulses are output.

The encoder position is latched on the rising edge of the PWM Out signal. The Status signal should also be checked at the rising edge of the PWM Out signal. If the Status signal changes during the PWM period, it does not affect the currently transmitted position information.

## PWM Out signal

The PWM Out is a pulse width modulation output with 16-bit resolution whose duty cycle is proportional to the measured position. The change of the pulse width by  $PW_{min}$  corresponds to a change in position by one count (change in angle for  $360^\circ / 65536 \approx 0.00549^\circ$ ).

## PWM Out signal timing diagram

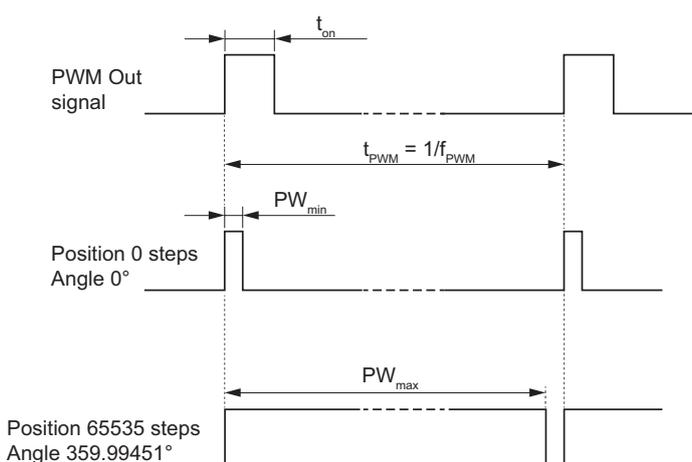

### Communication parameters

*Communication interface variant* in the part number defines the PWM frequency and all other dependent parameters.

Parameter	Symbol	Communication interface variant					Unit	Note
		A	B	C	D	E		
PWM frequency	$f_{\text{PWM}}$	122.07	274.66	366.21	549.32	1098.63	Hz	
Signal period	$t_{\text{PWM}}$	8192	3640.89	2730.67	1820.44	910.22	$\mu\text{s}$	
Minimum pulse width	$\text{PW}_{\text{min}}$	0.125	0.0556	0.0417	0.0278	0.0139	$\mu\text{s}$	Position 0 (Angle 0°)
Maximum pulse width	$\text{PW}_{\text{max}}$	8191.875	3640.83	2730.63	1820.42	910.21	$\mu\text{s}$	Positions 65534 and 65535 *
Min. counter frequency	$f_{\text{CTR}}$	8	18	24	36	72	MHz	Receiving counter frequency
Resolution		16 Bit	16 Bit	16 Bit	16 Bit	16 Bit		Fixed; resolution in part number must be set as "16B"

\* Note that positions 65534 and 65535 (Angle 359.98901° and 359.99451°) result in the same pulse width  $\text{PW}_{\text{max}}$ .


$$\text{Position [counts]} = \frac{t_{\text{on}} \times 65536}{t_{\text{PWM}}} - 1$$

$$\text{Position [°]} = \frac{(t_{\text{on}} - \text{PW}_{\text{min}}) \times 360^\circ}{t_{\text{PWM}}}$$

# SSI - Synchronous serial interface

The encoder position, in up to 20 bit natural binary code, and the encoder status are available through the SSI protocol. The position data is left aligned. After the position data there are two general status bits followed by the detailed status information.

## Electrical connection

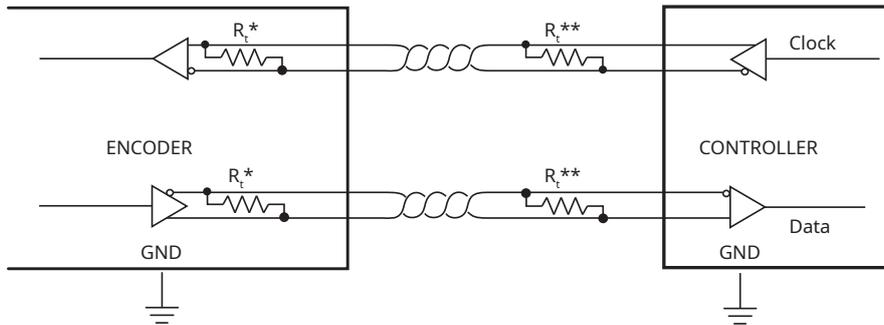


\* The Clock and Data signals are 5 V RS422 compatible differential pairs with RC termination inside the readhead.

\*\* Termination at the controller is required, if total cable length is longer than 5 m. The nominal impedance of the cable is 120 Ω.

## Output protection

Excessive output current and power dissipation caused by faults or by bus contention are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state, if the chip temperature becomes too high.

## SSI timing diagram

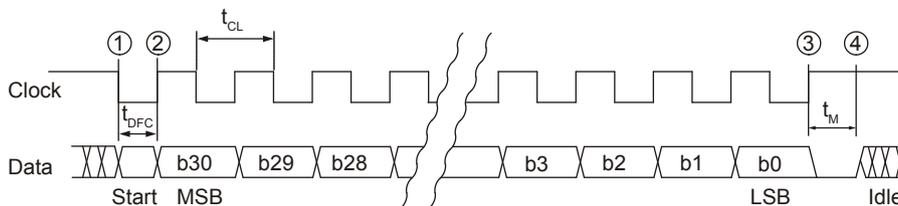


The controller interrogates the readhead for its position and status data by sending a pulse train to the Clock input. The Clock signal always starts from high. The first falling edge ① latches the last position data available and on the first rising edge ② the most significant bit (MSB) of the position is transmitted to the Data output. The Data output should then be latched on the following falling edge. On subsequent rising edges of the Clock signal the next bits are transmitted. If time between ① and ② is extended for additional 1 μs, then maximum clock frequency limit is 2.5 MHz instead of 500 kHz. This function is called "Delay First Clock" and must be supported by the controller to which the encoder is connected.

After the transmission of the last bit ③ the Data output goes to low. When the  $t_M$  time expires the Data output is undefined ④. The Clock signal must remain high for at least  $t_M$  before the next reading can take place.


While reading the data the period  $t_{CL}$  must always be less than  $t_M$ . However, reading the encoder position can be terminated at any time by setting the Clock signal to high for the duration of  $t_M$ .

To allow updating of the position data at least  $t_b$  should pass between two subsequent readings. If the reading request arrives earlier than  $t_b$  after the previous reading, the encoder position will not be updated.

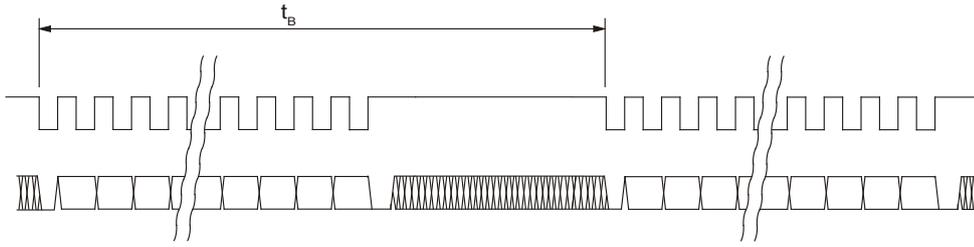

The power supply must be applied at least 10 ms before the clock sequence is being sent to the encoder.

### Maximum frequency

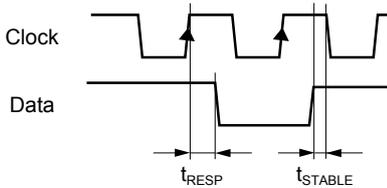


The readhead needs 170 ns to respond to incoming clocks ( $t_{RESP}$ ). Change on Data signal is delayed for 170 ns after the rising edge on Clock line. Additional delay is caused by the time the signal needs to propagate through cable to the readhead and back ( $t_{PROP}$ ). This delay is typically 14 ns per 1 meter of cable. Data signal must be stable for at least 10 % of the clock period length before the value is latched.

The clock frequency must be reduced with a longer cable. Total cable length must be taken into account, from the encoder to the receiver.

$$t_{DELAY} = t_{RESP} + t_{PROP} \times \text{cable length}$$

Frequency derating versus cable length:

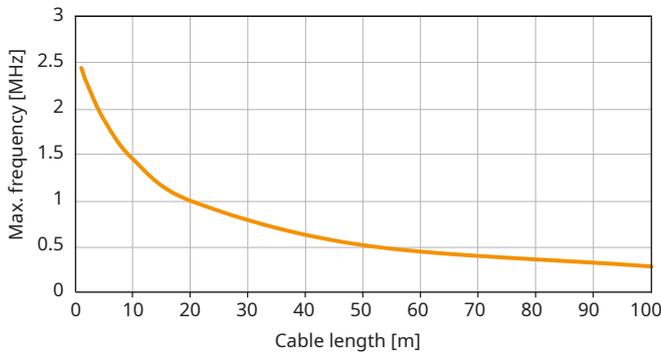

### Communication parameters

Parameter	Symbol	Min	Typ	Max
Delay first clock	$t_{DFC}$	1 $\mu$ s		10 $\mu$ s
Clock period	$t_{CL}$	2 $\mu$ s		20 $\mu$ s
Clock frequency	$f_{CL}$	50 kHz		500 kHz (2.5 MHz *)
Monoflop time	$t_M$		20 $\mu$ s	
Repetition rate	$t_B$	200 $\mu$ s		
Readhead response delay	$t_{RESP}$		170 ns	
Cable propagation delay	$t_{PROP}$		14 ns/m	

\* With *Delay First Clock* function on the controller.

## SSI - Synchronous serial interface continued

Start bit and idle line value are defined by the *Communication interface variant*.

Communication interface variant	Line state selection	Usage
<b>B</b>	Start bit = 1; idle line = 1	Standard

### Structure of data packet

Bit	b30 : b11	b10 : b9	b8 : b1	b0
<b>Data length</b>	20 bits	2 bits	8 bits	1 bit
<b>Meaning</b>	Encoder position	General status	Detailed status	Reserved

#### Encoder position

**b30 : b11** Encoder position – Left aligned, MSB first, LSB last. If the encoder resolution is lower than 20 bits, the last few bits of the encoder position, which are not used, are set to zero.

#### General status

**b10** Error bit. If set, the position is not valid.

**b9** Warning bit. If set, the encoder operational is close to its limits. The position is still valid, but the resolution and/or accuracy might be out of specification.

The Error and Warning bits can be set at the same time, in this case the Error bit has priority. The colour of the LED on the readhead housing indicates the value of the General status bits:

● Red = Error, ● Orange = Warning, ● Green = Normal operation, ○ No light = no power supply.

The warning or error status is more closely defined by the Detailed status bits.

#### Detailed status

**b8** Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.

**b7** Warning - Signal amplitude low. The distance between the readhead and the ring is too large.

**b6** Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.

**b5** Warning - Temperature. The readhead temperature is out of specified range.

**b4** Error - Power supply error. The readhead power supply voltage is out of specified range.

**b3** Error - System error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.

**b2** Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.

**b1** Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.

**b0** Reserved, always zero.


# BiSS C interface

The encoder position, in up to 20 bit natural binary code, and the encoder status are available through the BiSS C protocol. The position data is left aligned. After the position data there are two status bits (active low) followed by CRC (inverted).

BiSS is implemented for point-to-point operation; multiple slaves are not supported.

Communication is unidirectional, the readhead is not user programmable and custom parameters cannot be stored into the readhead.

## Electrical connection

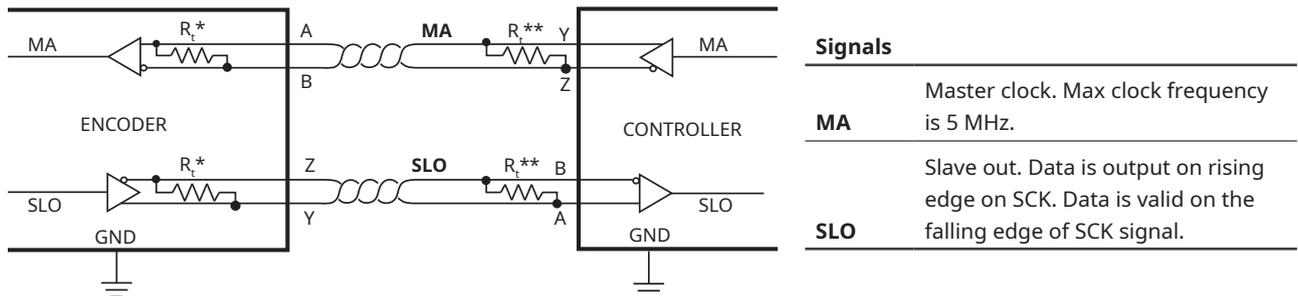


\* The MA and SLO lines are 5 V RS422 compatible differential pairs. The termination resistor on the MA and SLO lines are integrated inside the encoder.

\*\* Termination at the controller is required, if total cable length is longer than 5 m. The nominal impedance of the cable is 120 Ω.

## Output protection

Excessive output current and power dissipation caused by faults or by bus contention are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state, if the chip temperature becomes too high.

## BiSS C timing diagram

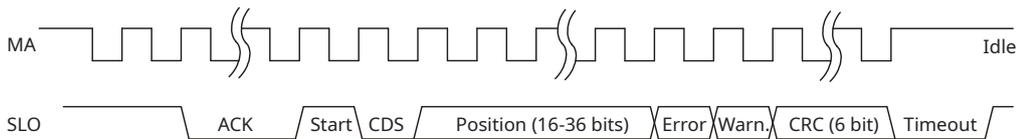

MA is idle high. Communication is initiated with first falling edge.


The encoder responds by setting SLO low on the second rising edge on MA. ACK length is 12 bits.

When the encoder is ready for the next request cycle it indicates this to the master by setting SLO high.

The absolute position and CRC data is in binary format and sent MSB first.

Multicycle data is not implemented, therefore CDS bit is always zero.

### Cable length compensation

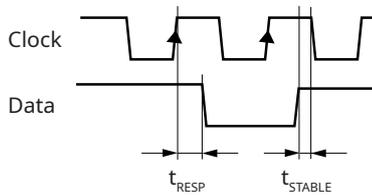

The readhead needs 170 ns to respond to incoming clocks ( $t_{RESP}$ ). Change on Data signal is delayed for 170 ns after the rising edge on Clock line. Additional delay is caused by the time the signal needs to propagate through cable to the readhead and back ( $t_{PROP}$ ). This delay is typically 14 ns per 1 meter of cable. Total cable length must be taken into account, from the encoder to the receiver.

$$t_{DELAY} = t_{RESP} + t_{PROP} \times \text{cable length}$$

The data signal must be stable before the value is latched. Therefore with a cable longer than 1 meter and a clock frequency higher than 2.5 MHz this delay must be compensated for in the receiver (controller) to which the encoder is connected.

### Status bits

Type	Value 0	Value 1	Possible reason for failure
Error	Position data is invalid.	OK	Error bit is active low. If low, the position is not valid.
Warning	Position data is valid.	OK	Warning bit is active low. If low, the encoder operation is close to its limits. The position is still valid but the resolution and/or accuracy might be out of specification.

### Communication parameters

*Communication interface variant* in the part number defines the functionality of the encoder.

Communication interface variant	Parameter	Value
H	MA frequency	Max. 5 MHz

Parameter	Symbol	Worst case
Latency		<10 $\mu$ s
Bandwidth *		2.5 kHz
Maximum request rate		31 kHz (28 kHz Multiturn counter option)
Timeout		20 $\mu$ s
Readhead response delay	$t_{RESP}$	170 ns
Cable propagation delay	$t_{PROP}$	14 ns/m

\* Bandwidth parameter is mechanical bandwidth. AksIM samples at 5 kHz therefore any mechanical changes that are appearing faster than 2.5 kHz are not detectable on the output (Nyquist theorem). If request for position comes faster than sampling frequency, AksIM encoder recalculates the position at the time of request based on current ring velocity.

### Data packet description

Data packet length depends on the resolution and can be from 24 to 44 bits long. It consists of 16 bits for the multiturn counter (if selected) and 16 to 20 bits of Position selected by (resolution), followed by 2 Status bits and 6 CRC bits (see table below).

Resolution	Multiturn counter	Position	Status		CRC (inverted)
			Error	Warning	
16B		16 bits			
17B		17 bits			
18B		18 bits			
19B		19 bits			
20B	0 bits	20 bits	1 bit	1 bit	6 bits
16M		16 bits			
17M		17 bits			
18M		18 bits			
19M		19 bits			
20M	16 bits	20 bits	1 bit	1 bit	6 bits

Example: 18 bits of position + 2 status bits + 6 bits CRC = 26 bits long data packet.

Polynomial for CRC calculation of position, error and warning data is:  $x^6 + x^1 + 1$ . Represented also as 0x43. It is inverted and transmitted MSB first.

CRC calculation example is in application note document CRCD01, available for download from [AksIM website](#) or [RLS media center](#).

For more information regarding BiSS protocol see [www.biss-interface.com](http://www.biss-interface.com).

# SPI - Serial peripheral interface

The SPI interface is designed for communication with nearby devices.

## Electrical connection

All data signals are 3.3 V LVTTTL. Inputs are 5 V tolerant.

Maximum current sourced from or sunk into signal lines should not exceed 20 mA.

Signal	Description
$\overline{CS}$	Active low. $\overline{CS}$ line is used for synchronisation between master and slave devices. During communication it must be held low. Idle is high. Rising edge on $\overline{CS}$ signal resets the SPI interface.
SCK	Clocks out the data on rising edge. Max frequency 3 MHz at 1.5 m cable length.
MISO	Data is output on rising edge on SCK after $\overline{CS}$ low. Data is valid on the falling edge of SCK signal. During $\overline{CS}=1$ MISO line is in high-Z mode.
Status	Indicates normal operation (only available with S option).

## Communication parameters

*Communication interface variant* in the part number defines the SPI interface type and all dependent parameters.

Communication interface variant	Description	Parameter	Value
S	SPI slave - simple mode	Resolution	Fixed - resolution in part number must be set as "16B"
		Status	Error status available on a separate wire
		Data length	16 bit data packet - position only
A	SPI slave - advanced mode	Resolution	Selectable (see <b>Part numbering</b> )
		Status	All status bits are available through the SPI
		Data length	40 bit data packet - position, status, CRC
T	SPI slave - advanced mode with timestamp	Resolution	Selectable (see <b>Part numbering</b> )
		Status	All status bits are available through the SPI
		Data length	56 bit data packet - position, status, timestamp, CRC

Parameter	Symbol	Min	Typ	Max	Note
Clock frequency	$f_{CLK}$	1 Hz		3 MHz	Max frequency with 1.5 m cable
Time after $\overline{CS}$ low to first SCK rising edge	$t_s$	2 $\mu$ s			
Time after last SCK falling edge to $\overline{CS}$ high	$t_H$	1 $\mu$ s			
$\overline{CS}$ high time	$t_R$	8 $\mu$ s			Time to complete SPI reset
Read repetition rate	$f_{REP}$			5 kHz	If higher, the same position data might be transmitted twice

SPI interface continued

## SPI slave - simple mode (variant S)

---

### Structure of data packet

Data packet is 16 bits long. MSB first. Left aligned. Position only, no status bits. Only 16-bit resolution available. Repetition of reading is maximum 5000 times per second. If higher, it is possible to read the same position data twice.


### Status signal

The Status signal indicates the current status of the encoder. The Status signal is high with normal operation and valid position information. The low state of the Status signal indicates an error state of the encoder which can be caused by:

- Operation outside the installation tolerances
- Invalid or corrupted magnetisation of the ring
- Sensor malfunction
- System error
- No power supply

When the Status signal is low, the data read through the SPI interface is invalid. The Status signal should be checked at the first rising edge of the SCK signal. If the Status signal changes during the data transmission, it does not affect the currently transmitted position information.

### SPI slave timing diagram (variant S)

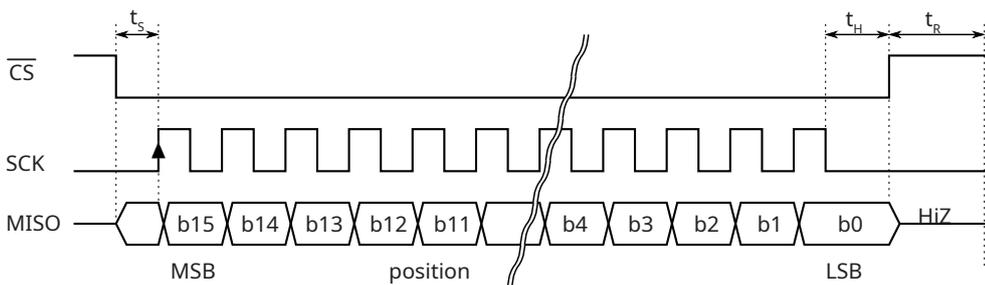

## SPI slave - advanced mode (variant A)

### Structure of data packet

Data packet is 40 bits long. MSB first. Position data is left aligned.

Repetition of reading is maximum 5000 times per second. If higher, it is possible to read the same position data twice.

Bit	b31 : b12	b11 : b10	b9 : b2	b1 : b0	c7 : c0
Data length	20 bits	2 bits	8 bits	2 bits	8 bits
Meaning	Encoder position	General status	Detailed status	Reserved always 1	CRC

#### Encoder position

**b31 : b12** Encoder position, left aligned, MSB first. If the encoder resolution is lower than 20 bits, the last few bits of the encoder position, which are not used, are set to zero.

#### General status

**b11** Error. If bit is set, position is not valid.

**b10** Warning. If bit is set, encoder is near operational limits. Position is valid. Resolution and / or accuracy might be lower than specified.

Error and Warning bits can be set at the same time; in this case Error bit has priority.

The color of the LED on the readhead housing indicates the value of the General status bits:

● Red = Error, ● Orange = Warning, ● Green = Normal operation, ○ No light = no power supply.

The warning or error status is more closely defined by the Detailed status bits.

#### Detailed status

**b9** Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.

**b8** Warning - Signal amplitude low. The distance between the readhead and the ring is too large.

**b7** Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.

**b6** Warning - Temperature. The readhead temperature is out of specified range.

**b5** Error - Power supply error. The readhead power supply voltage is out of specified range.

**b4** Error - System error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.

**b3** Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.

**b2** Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.


#### CRC

**c7 : c0** CRC check with polynomial 0x97 - CRC calculation example is in application note document CRCD01, available for download from [AksIM website](#) or [RLS media center](#).

### Status signal

The Status signal is not available in advanced mode.

### SPI slave timing diagram (variant A)

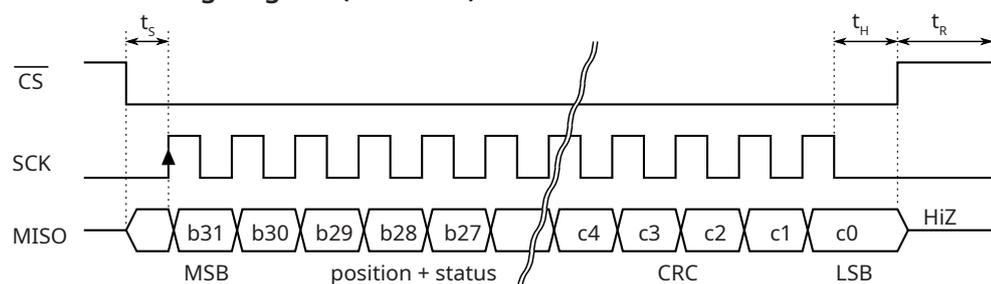

## SPI slave - advanced mode with timestamp (variant T)

### Structure of data packet

Data packet is 56 bits long. MSB first. Position data is left aligned.

Repetition of reading is maximum 5000 times per second. If higher, it is possible to read the same position data twice.

Bit	b31 : b12	b11 : b10	b9 : b2	b1 : b0	t15 : t0	c7 : c0
Data length	20 bits	2 bits	8 bits	2 bits	16 bits	8 bits
Meaning	Encoder position	General status	Detailed status	Reserved always 1	Timestamp	CRC

#### Encoder position

**b31 : b12** Encoder position, left aligned, MSB first. If the encoder resolution is lower than 20 bits, the last few bits of the encoder position, which are not used, are set to zero.

#### General status

**b11** Error. If bit is set, position is not valid.

**b10** Warning. If bit is set, encoder is near operational limits. Position is valid. Resolution and / or accuracy might be lower than specified.

Error and Warning bits can be set at the same time; in this case Error bit has priority. The color of the LED on the readhead housing indicates the value of the General status bits:

● Red = Error, ● Orange = Warning, ● Green = Normal operation, ○ No light = no power supply.

The warning or error status is more closely defined by the Detailed status bits.

#### Detailed status

**b9** Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.

**b8** Warning - Signal amplitude low. The distance between the readhead and the ring is too large.

**b7** Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.

**b6** Warning - Temperature. The readhead temperature is out of specified range.

**b5** Error - Power supply error. The readhead power supply voltage is out of specified range.

**b4** Error - System error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.

**b3** Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.

**b2** Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.

#### Timestamp

**t15 : t0** Time between latch of mechanical position and  $\overline{CS}$  falling edge in 1/4  $\mu$ sec. Resolution is 0.25  $\mu$ s.

#### CRC


**c7 : c0** CRC check with polynomial 0x97 - CRC calculation example is in application note document CRCD01, available for download from [AksIM website](#) or [RLS media center](#).

### Status signal

The Status signal is not available in this mode.

SPI interface continued

SPI slave timing diagram (variant T)

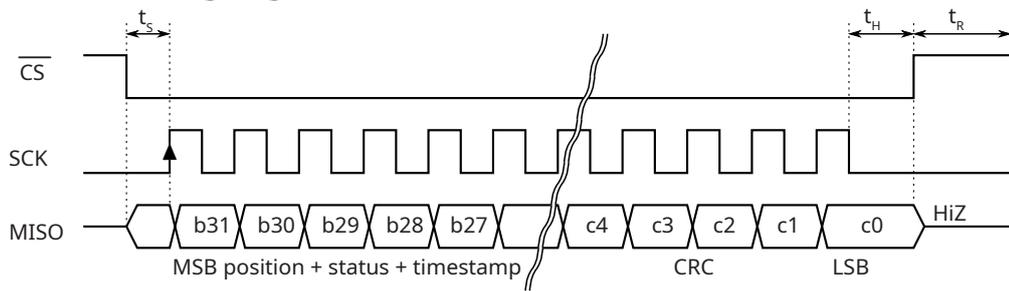

# USB – Universal serial bus

Encoder identification, position data and temperature are available with request-response type of communication over the Universal Serial Bus (USB). The encoder is recognised by a computer as a virtual COM port. This type of communication can be used for direct connection to a measuring station operated by an (industrial) PC. Supported operating systems: 32-bit and 64-bit Windows (XP, Vista, 7 and 8/10), Linux and Mac OS X. The encoder may not be recognised correctly when connected to a USB 3.0 port. Please use a USB 2.0 port or a USB hub. The encoder can be accessed from any software that supports connection to a virtual COM port (e.g. C++, Delphi, Labview, etc.).

## Electrical connection

USB cable with USB connector type A is provided. The cable length is 1.8 m. It can be extended to 5 meters with certified USB extension cables suitable for higher supply currents (200 mA minimum).

## USB drivers

USB drivers for the virtual COM port for Windows are available on the [AksIM website](#).

Encoder should be automatically recognized on the Linux system and Mac OS X. It uses the »Communication Device Class driver (CDC) «.

VID = 0483 & PID = 5740

## Communication parameters

Settings of baud rate, character length and parity bits do not affect the communication. Any value can be used.

*Communication interface variant* does not affect the USB interface. Use default value "B".

## Command set

### Command "v" (0x76) - version request

---

Response - version info and serial number  
5 bytes ASCII identification string ("AksIM")  
1 byte ASCII space character  
8 bytes ASCII serial number  
16 bytes ASCII part number  
1 byte binary firmware version  
1 byte binary communication interface version (5)  
1 byte binary ASIC revision  
3 bytes ASCII resolution identifier

---

### Command "1" (0x31) - single position data request

---

Response - position and status, transmitted once  
1 byte header 0xEA  
3 bytes binary absolute position, big-endian, left aligned  
2 bytes encoder status – see below  
1 byte constant footer 0xEF

---

The next request should not be sent sooner than 250  $\mu$ s after the end of the previous response from the readhead to allow refreshing of the position data. If request is sent sooner, data will arrive at the end of the refresh cycle.

---

### Command "2" (0x32) - continuous position data request

---

Response - position and status, transmitted continuously  
1 byte constant header 0xEA  
3 bytes binary absolute position, big-endian, left aligned  
2 bytes encoder status – see below  
1 byte constant footer 0xEF

---

### Command "3" (0x33) - request for continuous position data with reduced length

---

Response - position and status, transmitted continuously  
3 bytes binary absolute position, big-endian, left aligned  
1 byte detailed encoder status – see below

---

## USB interface continued

<b>Command "0" (0x30) - stop</b>
Stop continuous transmission
<b>Command "t" (0x74) - temperature request</b>
Response - temperature of the encoder 1 byte signed binary number - temperature of the sensor in °C
Accuracy of the readings is ±3 °C This function is available with firmware version 30 and higher (see command "v" for firmware version).

## Structure of data packet

<b>Encoder status (two bytes):</b>	
<b>b15 : b10</b>	Reserved; always zero
<b>General status</b>	
<b>b9</b>	Error. If bit is set, position is not valid.
<b>b8</b>	Warning. If bit is set, encoder is near operational limits. Position is valid. Resolution and/or accuracy might be lower than specified.
Error and Warning bits can be set at the same time; in this case Error bit has priority. The color of the LED on the readhead housing indicates the value of the General status bits: <span style="color: red;">●</span> Red = Error, <span style="color: orange;">●</span> Orange = Warning, <span style="color: green;">●</span> Green = Normal operation, <span style="color: grey;">○</span> No light = no power supply. The warning or error status is more closely defined by the Detailed status bits.	
<b>Detailed status</b>	
<b>b7</b>	Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.
<b>b6</b>	Warning - Signal amplitude low. The distance between the readhead and the ring is too large.
<b>b5</b>	Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.
<b>b4</b>	Warning - Temperature. The readhead temperature is out of specified range.
<b>b3</b>	Error - Power supply error. The readhead power supply voltage is out of specified range.
<b>b2</b>	Error - System error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.
<b>b1</b>	Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.
<b>b0</b>	Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.

# Latency

---

## Latency on Asynchronous serial communication

---

Readhead has its internal cycle of acquiring position that is running at 5 kHz ( $\pm 10\%$ ). One cycle takes 200  $\mu\text{s}$ . This does not depend on the request frequency.

Controller sends the request. If the request arrives into the readhead just after new cycle has started, it will take 200  $\mu\text{s}$  for the new position to be ready. It is transmitted to controller, always at the end of the cycle. In this case there will be 200  $\mu\text{s}$  of delay between request and answer (transmission time is not taken into account).

If the request arrives into the readhead just before the end of the cycle, the position is just ready and response will be transmitted instantly. Position was acquired 200  $\mu\text{s}$  ago at the beginning of the cycle.

Second mode is continuous transmission after every cycle. In this mode there is no need to query the encoder for position but it sends it immediately when it is ready.

When the controller receives the first bit of the data position it is 200  $\mu\text{s}$  old. This time is constant ( $\pm 10\%$ ). The additional delay is due to time needed to complete the data transmission. This varies depending on the selected bit-rate.

(Per special request timing information and/or speed can be provided in the same data packet as position.)

## Latency on other slave type interfaces (SSI, SPI slave)

---

All interfaces transmit the last valid data available.

Internal cycle of the encoder is 200  $\mu\text{s}$ . This is the delay from the time when the mechanical position is latched by the sensor to the time when the data is ready to be transmitted over the interface.

If the request comes right after the data is ready, latency will be 200  $\mu\text{s}$ .

If request comes just before the new data will be calculated, then latency is 400  $\mu\text{s}$ .

For example:

At  $t = 0 \mu\text{s}$  the physical position is latched but position data is not yet calculated. It will be available at 200  $\mu\text{s}$ .

If the request comes at  $t = 1 \mu\text{s} - 199 \mu\text{s}$ , the last available data will be sent - the one from previous cycle when position was latched at  $t = -200 \mu\text{s}$ .

## Latency on BiSS

---

BiSS uses a different approach and calculation so the request rate can be higher than 5 kHz. Typically, request rate can be up to 30 kHz. Position is latched at the first falling edge on the MA (clock) line and calculated instantly, therefore latency is shorter than 10  $\mu\text{s}$ .

# Part numbering

## Readhead

**MHA 7 SF A 16B T 10 F 00**

### Series

**MHA** - Magnetic head AksIM

### MRA ring compatibility

- 7** - For use with MRA7 ring
- 8** - For use with MRA8 ring

### Communication interface

- DC** - BiSS C, RS422
- PW** - Pulse Width Modulation (PWM)
- SC** - Synchronous serial interface (SSI), RS422
- SF** - Asynchronous serial, RS422
- SP** - SPI slave, LVTTTL
- US** - USB 1.1

### Communication interface variant

See table next to the description of the chosen communication interface for detailed information

For **DC**: **H** - BiSS C, low latency, 12 ACK bits, max. 5 MHz

For **SC**: **B** - Start bit and idle data line 1 (standard)

For **SP**: **A** - SPI slave advanced

**S** - SPI slave simple

**T** - SPI slave advanced with timestamp

For **US**: **B** - Standard

For **PW**: Base frequency in Hz (16 bits resolution only):

A	B	C	D	E
122	275	366	549	1099

For **SG**: Link speed in kbps:

A	B	C	D	E	F
115.2	128	230.4	256	500	1000

### Resolution

For **PWx** and **SPS**:

**16B** - 16 bits per revolution

For **DCH**, **SCB**, **SFx**, **SPA** and **SPT**:

**16B** - 16 bits per revolution

**17B** - 17 bits per revolution

**18B** - 18 bits per revolution

**19B** - 19 bits per revolution

**20B** - 20 bits per revolution \*

For **US**:

**17B** - 17 bits per revolution \*

**18B** - 18 bits per revolution \*

**Multiturn counter options** (for **DCH** only)

**16M** - 16 bits per revolution + 16 bits multiturn counter

**17M** - 17 bits per revolution + 16 bits multiturn counter

**18M** - 18 bits per revolution + 16 bits multiturn counter

**19M** - 19 bits per revolution + 16 bits multiturn counter

**20M** - 20 bits per revolution + 16 bits multiturn counter \*

\* For MHA8 readhead only.

### Housing

**T** - T-shape (standard)

### Cable length

**10** - 1.0 m (standard, eg. 13 - 1.3 m OR 13 m if special option 0M is chosen)

**18** - 1.8 m (standard with **US**)

### Connector option

**A** - 9 pin D type plug

**F** - Flying lead (no connector)

**U** - USB type A (only available with USB output type)

### Special requirements

**00** - No special requirements (standard)

**0M** - Cable length in meters

Not all part number combinations are valid. Please refer to the table of available combinations on the following page.

Table of available combinations

Series	Ring compatibility	Communication interface	Communication interface variant	Resolution	Housing	Cable length	Connector option	Special requirements
MHA	7	DC	H	16B / 17B / 18B / 19B	T	10 / 18	A / F	00 / 0M
		PW	A / B / C / D / E	16B				
		SC	B	16B / 17B / 18B / 19B				
		SF	A / B / C / D / E / F					
		SP	A / T					
			S	16B				
		US	B	17B				
	8	DC	H	16B / 17B / 18B / 19B / 20B				
		PW	A / B / C / D / E	16B				
		SC	B	16B / 17B / 18B / 19B / 20B				
		SF	A / B / C / D / E / F					
		SP	A / T					
			S	16B				
		US	B	18B				
						U		

## Magnetic ring

MRA 7 D 049 A A 025 B 00

### Series

MRA - AksIM magnetic ring

### MRA ring type

- 7 - For use with MRA7 readhead
- 8 - For use with MRA8 readhead

### Accuracy grade

D -  $\pm 0.1^\circ$

### Outer diameter

- 049 - 49 mm
- 080 - 80 mm

### Material

A - Stainless steel with glued rubber bonded ferrite

### Cross section

- A - 3.9 mm thick
- B - 2 mm thick, lightweight

### Inner diameter

- 025 - 25 mm
- 034 - 34 mm
- 055 - 55 mm
- 068 - 68 mm

### Zero position

- B - Marked by additional hole in metal hub
- E - Engraved
- A - No marking

### Special requirements

00 - No special requirements (standard)

Not all part number combinations are valid. Please refer to the table of available combinations below.

## Table of available combinations

Series	MRA ring type	Accuracy grade	Outer diameter	Material	Cross section	Inner diameter	Zero position	Special requirements
MRA	7	D	049	A	A / B	025	B	00
						025	E	
	8		034			A		
			055					
			055			E		

## Accessories

---



Alignment tool for MHA7 readhead / MRA7 ring  
radial positioning  
**MHA7TACC01**



Alignment tool for MHA8 readhead / MRA8 ring  
radial positioning  
**MHA8TACC01**

## Head office

---

### RLS Merilna tehnika d. o. o.

Poslovna cona Žeje pri Komendi  
Pod vrbami 2  
SI-1218 Komenda  
Slovenia

T +386 1 5272100  
E [mail@rls.si](mailto:mail@rls.si)  
[www.rls.si](http://www.rls.si)

## Global support

---

Visit our [website](#) to contact your nearest sales representative.

## Document issues

---

Issue	Date	Page	Description
12	22. 11. 2021	-	New design
		28	Timestamp definition amended
13	17. 4. 2024	21, 33, 34	SCA communication interface removed

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS Merilna tehnika d. o. o., are available at <https://www.rls.si/eng/salesterms>, (b) Renishaw, Inc., are available at <https://www.renishaw.com/legal/en/-42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS Merilna tehnika d. o. o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS Merilna tehnika d. o. o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2023 RLS d. o. o.