


RM44 rotary encoder with external zeroing

The RM44 encoder-sensor base unit is designed for integration onto electric motors or other devices for shaft position and velocity measurement.



The RM44 with external zeroing is designed for setting the encoder zero position by using zero pen. It is designed for power supply voltage of 5 V only.

For electrical characteristics and dimensional drawings please refer to RM44 data sheet (RM44D01).

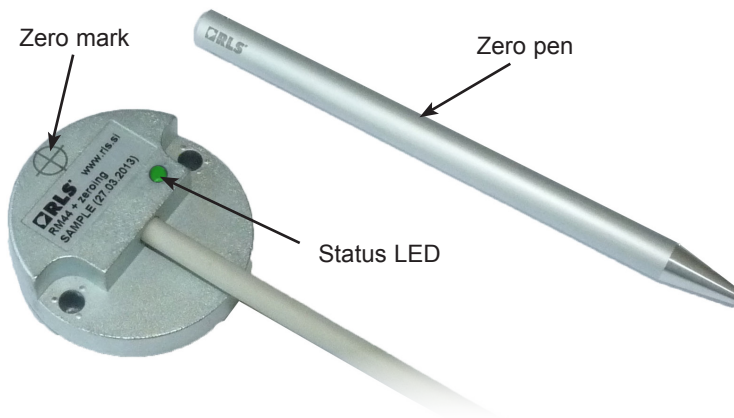


Zero position

- **Incremental:** Position of Index
- **Commutation UVW:** First rising edge of U output
- **SSI:** Absolute position 0
- **Linear voltage:** Lowest voltage level

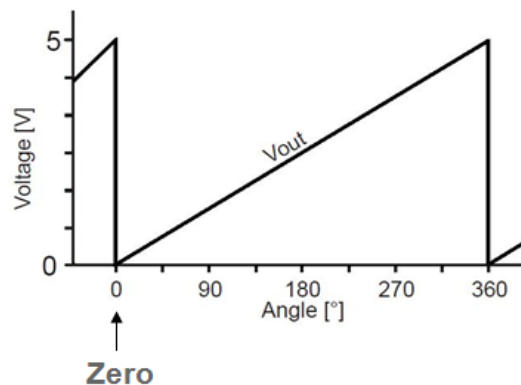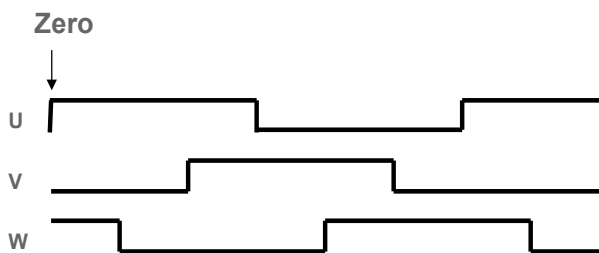

Setting the zero position

1. **Install the magnetic actuator and RM44 encoder.**
Please refer to RM44 data sheet (RM44D01) for more information.
2. **Set the mechanical zero position.**
3. **Use the zero pen to set the encoder zero position (see image):**
 - 3.1 Touch the Zero mark with the apex of the Zero pen - the status LED goes off.
 - 3.2 Hold the Zero pen for 3 seconds.
 - 3.3 The new Zero position is set when status LED goes RED.

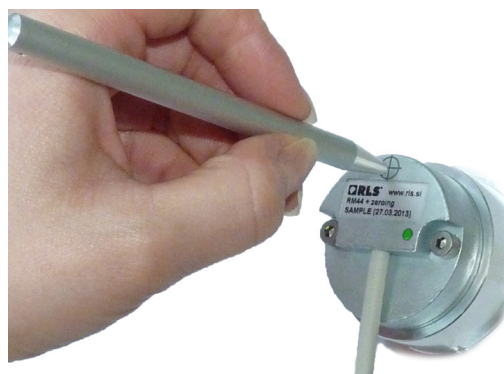

Status indicator LED

LED	Status
Green	Normal operation
Red	Zero position
No light	Presence of Zero pen

Ordering code

RM44 IC 00 12Z 10 F 2 E 10

Output type

IC - Incremental, RS422, 5 V

SC - Absolute binary synchro-serial (SSI), RS422, 5 V

Ux - Commutation single ended + incremental with line driver:

Code	Description	Nr. of poles
UA	one (1) period per rev	2 poles
UB	two (2) periods per rev	4 poles
UC	three (3) periods per rev	6 poles
UD	four (4) periods per rev	8 poles
UE	five (5) periods per rev	10 poles
UF	six (6) periods per rev	12 poles
UG	seven (7) periods per rev	14 poles
UH	eight (8) periods per rev	16 poles

Vx - Linear voltage:

Linear voltage output 0 - 5 V, supply 5 V DC

	360°	180°	90°	45°
CW	VA	VB	VC	VD
CCW	VE	VF	VG	VH

Shaft size

00 - n/a

Special requirements

10 - No special requirements (standard)
1M - Cable length in meters

Environment and material

E - IP64, die-cast body (Zinc alloy), standard EMC grade (standard)
F - IP68, die-cast body (Zinc alloy), standard EMC grade

Body style and cable exit

2 - Cylindrical body, radial cable exit

Connector options

F - Flying lead (no connector)

Cable length

10 - 1.0 meter (or 10 meters if **1M** special requirement is chosen)

Resolution

For Vx:

10Z - 1024 counts or positions per revolution

For IC, SC and Ux:

Binary		
12Z - 4096	10Z - 1024	07Z - 128
11Z - 2048	09Z - 512	06Z - 64
	08Z - 256	05Z - 32

Accessories




Zeroing pen


Part number: ZEROPEN00

Magnetic actuators and magnets

Actuator for integration onto shaft



Shaft = \varnothing^*h7
Fixing: Grub screw provided

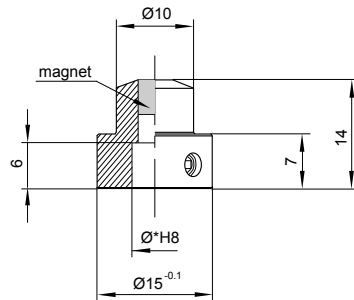

Part numbers:


For resolutions up to 9 bit absolute (512 cpr incremental)
RMA04A2A00 – $\varnothing 4$ mm shaft **RMA10A2A00** – $\varnothing 10$ mm shaft
RMA05A2A00 – $\varnothing 5$ mm shaft **RMA19A2A00** – $\varnothing 3/16$ " shaft
RMA06A2A00 – $\varnothing 6$ mm shaft **RMA25A2A00** – $\varnothing 1/4$ " shaft
RMA08A2A00 – $\varnothing 8$ mm shaft **RMA37A2A00** – $\varnothing 3/8$ " shaft

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMA04A3A00 – $\varnothing 4$ mm shaft **RMA10A3A00** – $\varnothing 10$ mm shaft
RMA05A3A00 – $\varnothing 5$ mm shaft **RMA19A3A00** – $\varnothing 3/16$ " shaft
RMA06A3A00 – $\varnothing 6$ mm shaft **RMA25A3A00** – $\varnothing 1/4$ " shaft
RMA08A3A00 – $\varnothing 8$ mm shaft **RMA37A3A00** – $\varnothing 3/8$ " shaft

Actuator for integration into shaft



Hole = $\varnothing 6G7$
Fixing: Glue (recommended – LOCTITE 648 or LOCTITE 2701)




Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMH06A2A00

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMH06A3A00

Magnet for direct recessing in non-ferrous shafts



Fixing: Glue (recommended – LOCTITE 648 or LOCTITE 2701)

Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMM44A2A00 (individually packed) – for sample quantities only
RMM44A2C00 (packed in tubes)

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMM44A3A00 (individually packed) – for sample quantities only
RMM44A3C00 (packed in tubes)

RE58 flange part numbering

Refer to RE58 datasheet for further details.



Part numbers:

RE58A10 - $\varnothing 58$ mm 10 mm shaft

RE58B06 - $\varnothing 58$ mm 6 mm shaft

RE58C10 - $\varnothing 58$ mm 10 mm shaft

All RE58 flanges are supplied with required washer and M4 fasteners for RM44 encoder attachment.

Head office

RLS merilna tehnika d.o.o.

Poslovna cona Žeje pri Komendi
Pod vrbami 2
SI-1218 Komenda
Slovenia

T +386 1 5272100

F +386 1 5272129

E mail@rls.si

www.rls.si

Document issues

Issue	Date	Page	Amendments done
1	23. 2. 2016	General	New document

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS merilna tehnika d.o.o., are available at <https://www.rls.si/customer-service>, (b) Renishaw, Inc., are available at <http://www.renishaw.com/Shop/legal/en/-42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS merilna tehnika d.o.o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS merilna tehnika d.o.o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2018 RLS d.o.o.