

RMB14


Angular Magnetic Encoder Module

MINIATURE
SIZE

HIGH SPEED

NON-CONTACT

The RMB14 is a compact, absolute high-speed encoder module. With a PCB diameter of only 14 mm, the module fits into miniature designs. Output signals are provided in industry standard absolute and incremental formats. The RMB14 can be used in a variety of applications including robotic grippers, marine, medical, printing, assembly lines, industrial automation, motor control and metrology devices.

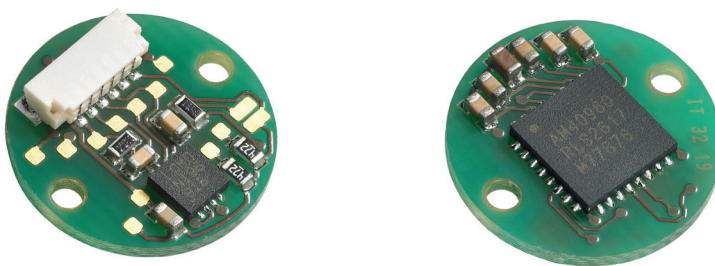

The image does not represent all variants.

Features and benefits

- ▶ 14 mm diameter circular module
- ▶ 3.3 V and 5 V power supply
- ▶ High speed operation up to 30,000 rpm
- ▶ Absolute - up to 12 bit resolution (4,096 counts per revolution)
- ▶ Industry standard absolute, incremental and linear voltage output formats
- ▶ Accuracy up to $\pm 0.5^\circ$
- ▶ RoHS compliant - see Declaration of conformity



MOTOR CONTROL



MEDICAL



PRINTING




MARINE



INDUSTRIAL
AUTOMATION

General information

The encoder module consists of a magnetic actuator and a separate sensor board. The rotation of the magnetic actuator is read and processed by a custom encoder chip on the sensor board to obtain the required output format.




RMB14 encoder module

+



=




A magnet for direct
recessing in non-ferrous
shafts

RMB14 system


Choose your RMB14 angular magnetic encoder module

RMB14IC

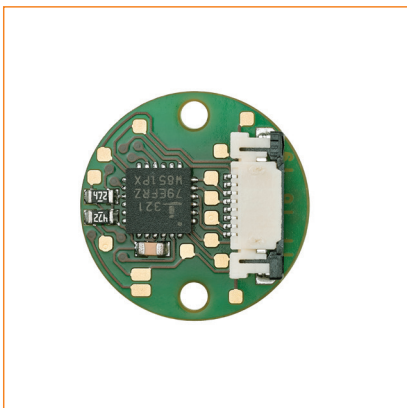


With FFC connector

RMB14SC

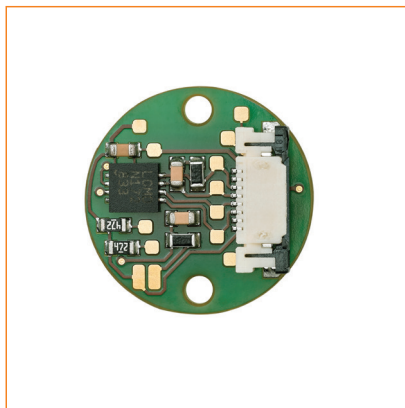

With FFC or header connector

RMB14Vx

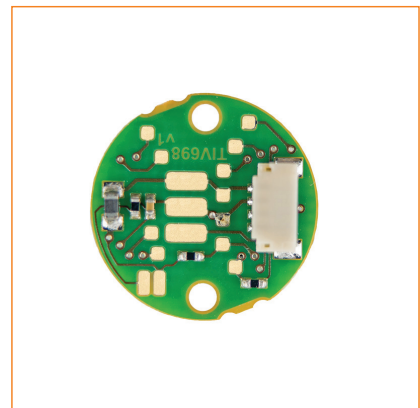

With soldering pads or header connector

Storage and handling

Operating and storage temperature range




With FFC connector: -40 °C to +85 °C
 With header connector: -25 °C to +85 °C
 With soldering pads: -40 °C to +125 °C

Humidity



Up to 70 % non-condensing



Readhead is ESD sensitive - handle with care.

Do not touch electronic circuit, wires or sensor area without proper ESD protection or outside of ESD controlled environment.

Chemical resistance

RLS products are often used in industrial applications and exposed to chemicals that can affect their internal and external components. While our products are designed to be resistant to many harsh chemicals and environments, long-term resistance will depend on exposure, temperature, and concentration. Most chemicals our products are exposed to are not in continuous contact. Therefore, a material that might not be resistant when submerged in a chemical will last indefinitely when wiped down by that same chemical once a day.



For further information or to confirm compatibility with a chemical in your environment, [contact RLS](#).

Packaging

Less than 20 products are packed individually in an antistatic box or an antistatic bag. If the order quantity is 20 systems or more, the products are packed in antistatic plastic trays or tubes. Magnets and readheads are packed separately.

Dimensions and installation drawings

Dimensions and tolerances are in mm.

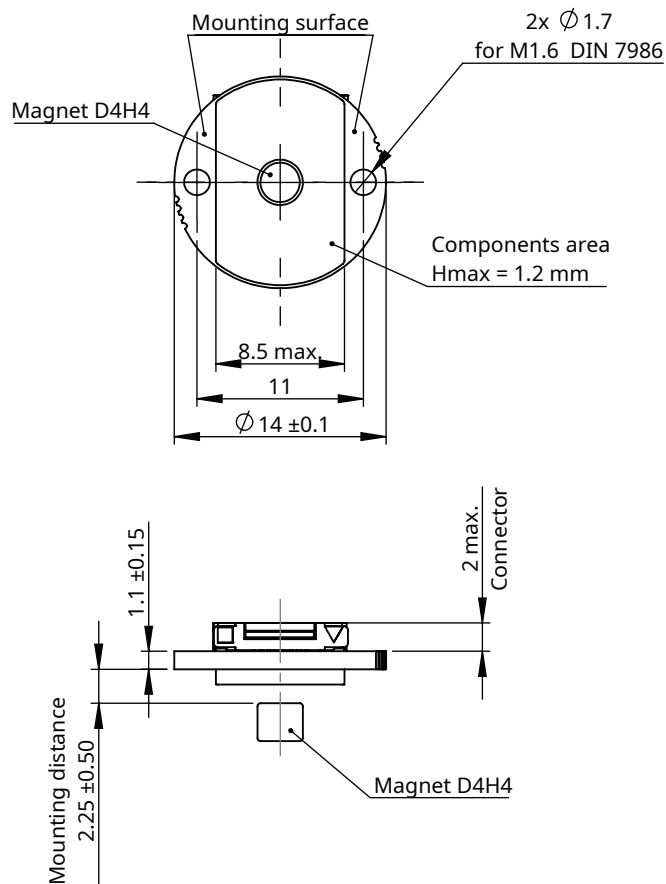


Installation tolerances

Installation tolerances for RMB14


Mounting distance 2.25 ± 0.50 mm



Radial displacement (concentricity) ± 0.3 mm



Perpendicularity ± 0.3°



— - Encoder ■ - Magnet

Output types

Incremental, RS422

RMB14IC


Specifications

Power supply	$V_{dd} = 3.3 \text{ V or } 5 \text{ V} \pm 5\%$
Current consumption	Max. 35 mA
Output signals	A+, B+, Z+, A-, B- Z- (RS422)
Accuracy*	$\pm 0.5^\circ$ *
Hysteresis	0.18°
Resolutions	32, 64, 128, 256, 512, 1024, 2048, 4096 cpr
Maximum speed	30,000 rpm
Temperature	$-40^\circ \text{C to } +85^\circ \text{C}$ (limited by FFC connector)
Operating and storage	

* Valid for $\varnothing 4 \times 4 \text{ mm}$ magnets only.

Connections

RMB14IC with FFC connector

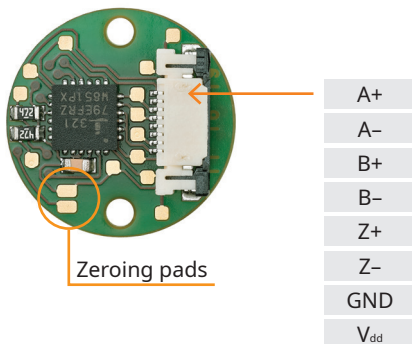


Connector type

JST_08FKZ-SM1-1-TB

Recommended signal termination

For data output lines only

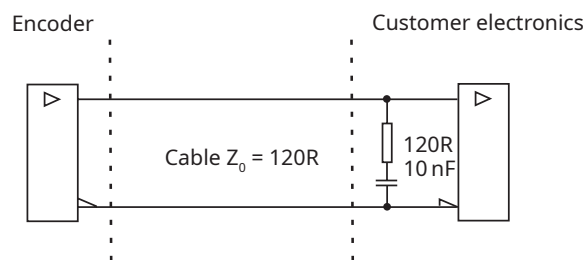

Setting the zero position

The zero position of the encoder can be easily adjusted by shortening the zeroing pads on the board. After locking the motor in the mechanical zero position, the two zeroing pads are shorted.

The output angle position data can be zeroed at any angle with a resolution of 0.0879° .

Absolute binary synchro-serial (SSI), RS422


RMB14SC

Specifications

Power supply	$V_{dd} = 3.3\text{ V or }5\text{ V} \pm 5\%$
Current consumption	Max. 35 mA
Data output	Serial data (RS422)
Data input	Clock (RS422)
Accuracy*	Typ. $\pm 0.5^\circ$ *
Hysteresis	0.18°
Resolutions	32, 64, 128, 256, 512, 1,024, 2,048, 4,096 cpr
Maximum speed	30,000 rpm
Temperature	$-25\text{ }^\circ\text{C to }+85\text{ }^\circ\text{C}$ (limited by SMD connector)
Operating and storage	$-40\text{ }^\circ\text{C to }+85\text{ }^\circ\text{C}$ (limited by FFC connector)

* Valid for $\varnothing 4 \times 4$ mm magnets only.


Timing diagram

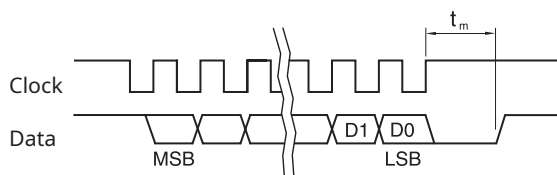

Clock $\leq 1\text{ MHz}$ $20\text{ }\mu\text{s} \leq t_m \leq 40\text{ }\mu\text{s}$


Recommended signal termination

For data output lines only

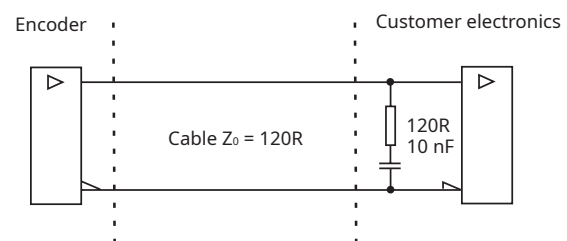

Connections


RMB14SC with FFC connector

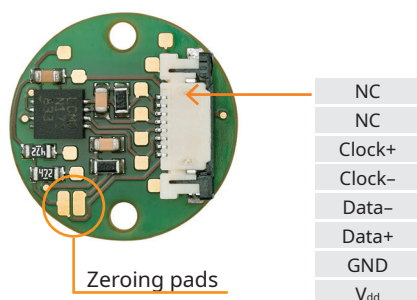

Connector type

JST_08FKZ-SM1-1-TB

RMB14SC with header connector

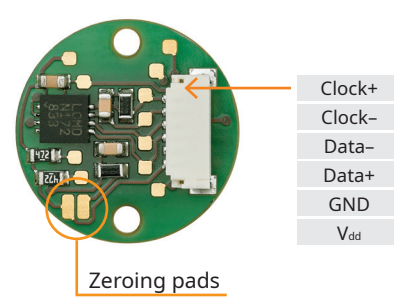

Connector type

JST SM06B-SURS-TF

Mating connector

JST 06SUR-32S (not provided)

Zero position setting

The zero position of the encoder can be easily adjusted by shortening the zeroing pads on the board. After locking the motor in the mechanical zero position, the two zeroing pads are shorted.

The output angle position data can be zeroed at any angle with a resolution of 0.0879° .

Linear voltage output

RMB14Vx

Specifications

Power supply	$V_{dd} = 5\text{ V} \pm 5\%$
Current consumption	Typ. 26 mA
Output voltage	0 V to V_{dd}
Output load	Max. 2 mA
Nonlinearity	1 %
Maximum speed	30,000 rpm
Temperature	-25 °C to +85 °C (limited by connector)
Operating and storage	-40 °C to +125 °C (limited by soldering pads)


The digital relative angular position information is converted to a linear voltage using a built-in 10-bit D/A converter. The linear output voltage swing ranges from 0 V and V_{dd} (5 V). The number of periods within a revolution (N_{period}) can be 1, 2, 4, or 8, corresponding to a full revolution over an angle (ϕ_{period}) of 360°, 180°, 90°, or 45°, respectively. The signal is composed of steps representing the angular movement required to register a change in position (ϕ_{step}) and the resulting change in output voltage (V_{step}). The number of steps in a period (N_{step}) is given in the table below.

When the magnetic actuator is rotated clockwise, the output voltage increases. When the magnetic actuator is rotated counterclockwise, the output voltage decreases.

Output type and electrical variant

	ϕ_{period}			
Rotation	360°	180°	90°	45°
Clockwise	VA	VB	VC	VD
Counterclockwise	VE	VF	VG	VH

Timing diagram

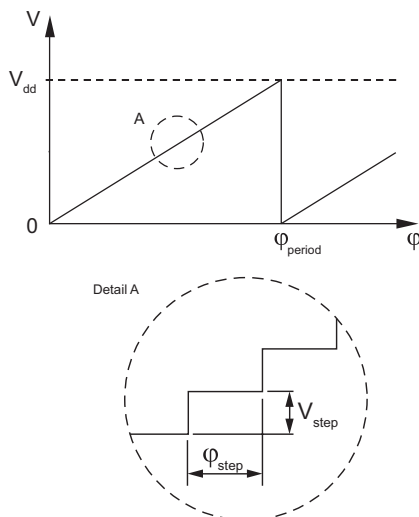

ϕ_{period}	N_{period}	N_{step}	ϕ_{step}
360°	1	1024	0.35°
180°	2	1024	0.18°
90°	4	1024	0.09°
45°	8	512	0.09°


$$\phi_{\text{step}} = \frac{\phi_{\text{period}}}{N_{\text{step}}}$$

$$V_{\text{step}} = \frac{V_{dd}}{N_{\text{step}}}$$


ϕ_{period}	Angle covered in one period (one sawtooth)
V_{period}	Output voltage range for one period
ϕ_{step}	Step angle (angular movement needed to register a change in the position)
V_{step}	Output voltage range for one step
N_{period}	Number of periods in one revolution

Connections

RMB14Vx

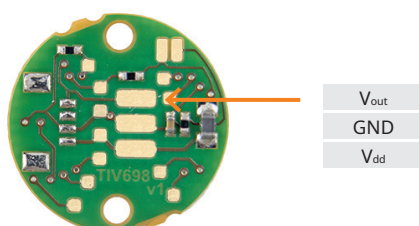

RMB14Vx with header connector

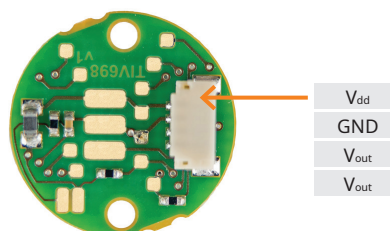

Connector type
JST-04SUR-32S

Part numbering

RMB14 IC 09B E 10

Output type

- IC** - Incremental, RS422
SC - Absolute binary synchro-serial (SSI), RS422
Vx - Linear voltage

Linear voltage output 0 - 5 V, supply 5 V DC

	360°	180°	90°	45°
CW	VA	VB	VC	VD
CWW	VE	VF	VG	VH

Resolution

For **IC** and **SC** (counts/positions per revolution):

05B	32	09B	512
06B	64	10B	1024
07B	128	11B	2048
08B	256	12B	4096

For **Vx** - **10B** (1024 positions per revolution)

Shape and connector

- C** - Circular, soldering pads (for **Vx** output only)
E - Circular, FFC connector (for **IC** and **SC** output)
F - Circular, header connector (for **SC** and **Vx** output)

Power supply

- 10** - 5 V power supply
33 - 3.3 V power supply (for **IC** and **SC** output)

Not all part number combinations are valid. Refer to the table of available combinations below.


Table of available combinations

Series	Output type	Resolution	Shape and connector	Power supply
RMB14	IC	05B / 06B / 07B / 08B / 09B / 10B / 11B / 12B	E	10 / 33
	SC		E / F	
	Vx	10B	C / F	10

Magnet ordering information

Magnet for direct recessing in non-ferrous shafts

Fixing: Glue (recommended - LOCTITE 648 or LOCTITE 2701)



Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)


RMM44A2A00 (individually packed) – for sample quantities only

RMM44A2C00 (packed in tubes)

For resolutions from 10 bit absolute (800 cpr incremental) and above

RMM44A3A00 (individually packed) – for sample quantities only

RMM44A3C00 (packed in tubes)



Part number:

RMM3010A1B00

RMM3010 magnets are only tested (not graded). Specified accuracy cannot be achieved by using magnet RMM3010.

Accessories



Cable assembly 6 pin, 1 m or 0.5 m

ACC031

ACC032

Compatible with RMB14SC with header connector.



Cable assembly, 4 pin, 1 m or 0.5 m

ACC075

ACC076

Compatible with RMB14Vx with header connector.



Molex Premo-Flex™ FFC Jumper, 8 Circuits, 203 mm

ACC038


Compatible with RMB14IC and RMB14SC.

For more information, see chapter [Cable assemblies](#).

Cable assemblies

Cables with crimped connectors

Part number	Length (L)	Connectors	Compatible with
ACC031	1 m	Dual ended JST connectors, 6 pins	RMB14SC with header connector.
ACC032	0.5 m		
ACC075	0.5 m	Dual ended JST connectors, 4 pins	RMB14Vx with header connector.
ACC076	1 m		

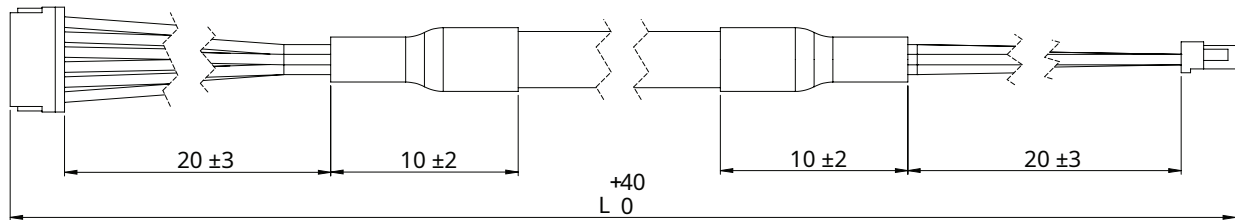

Dimensions and tolerances in mm.

Cable specifications

Connector type	ACC031, ACC032	JST 06SUR-32S
	ACC075, ACC076	JST-04SUR-32S
Configuration	10 × 0.0320 mm ²	
Sheath color	Black	
Rated voltage	30 V	
Temperature range	From -40 °C to +90 °C	

Wire color	Pin number		Output types			
	ACC031 / ACC032	ACC075 / ACC076	Absolute binary synchro-serial (SSI), RS422			Linear voltage output
			Incremental, RS422	with FFC connector	with header connector	
Red	1	4	V _{dd}	V _{dd}	-	V _{dd}
Blue	2	3	GND	GND	-	GND
Green	3	2	B-	Clock-	Data+	V _{out}
Yellow	4	-	B+	Clock+	Data-	-
Brown	5	1	Z-	Data-	V _{dd}	V _{out}
White	6	-	Z+	Data+	GND	-
Grey	-	-	A+	NC	Clock+	-
Violet	-	-	A-	NC	Clock-	-

Head office

RLS Merilna tehnika d. o. o.

Poslovna cona Žeje pri Komendi
Pod vrbami 2
SI-1218 Komenda
Slovenia

T +386 1 5272100
E mail@rls.si
www.rls.si

Global support

Visit our [website](#) to contact your nearest sales representative.

Document issues

Issue	Date	Page	Description
4	19. 7. 2023	-	New design od the document
		4	Installation tolerances added
		2, 7, 8	RMB14Vx Linear output voltage added
		9, 10	ACC037 removed
			ACC075 and ACC076 added

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS Merilna tehnika d.o.o., are available at <https://www.rls.si/eng/salesterms>, (b) Renishaw, Inc., are available at <https://www.renishaw.com/legal/en/--42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS Merilna tehnika d. o. o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS Merilna tehnika d. o. o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2023 RLS d.o.o.